



SPORTS FLOORING

Interlocking tile and PVC

Call us now
9632 0750



Bartley Biz Centre
Blk 15 Kaki Bukit Rd 4, #01-44,
Singapore 417808



david@ezzogenics.com
admin@ezzogenics.com



www.ezzogenics.com
www.woodfloor.com.sg




CONTENT

Elastic Interlocking tile	3 - 11
Badminton Floor	12 - 13
Table Tennis Floor	14
Basketball Floor	15
Tennis Floor	22

Elastic Interlocking Tile

Create a plastic classic

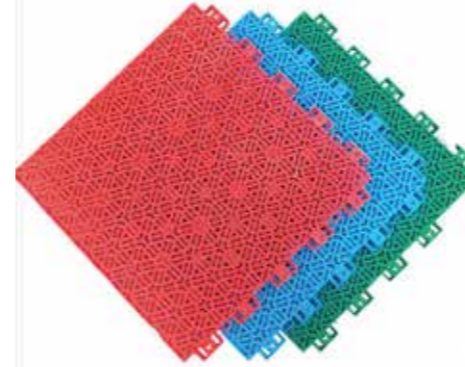

Product Features

1. Suspension structure, superior performance, joint protection.
2. Zero expansion, zero oil leakage, zero shrinkage, no smell.
3. Concave and convex surface layers have the best performance of anti-slip.
4. Porous mesh structure, easy to clean, easy to drain, easy ventilation.
5. Disassemble design, quick and easy to assemble, reusable, and effectively reduce costs.
6. Qualified with its chemical and physical requirements and new National Standard.
7. 100% recyclable


Technical Parameters(physics)

Test Items	Technical requirements	Test Results
Ball bounce rate	≥90	97
Fr (0° C)	25-50	25.8
Fr (23° C)	25-50	25.8
Fr (50° C)	25-50	26.2
Vertical deformation mm	0.6-3.0	0.64
Tensile strength MPa	≥0.4	21.41
Elongation at break %	≥40	109.58
Inflaming retarding	I	I

Technical Parameters(physics)

Test Items	Technical requirements	Test Results
Slip resistance (dry test)	80-110	106
Slip resistance (wet test)	≥47	51
Tensile strength after 500h MPa	≥0.5	21.61
Elongation at break after 500h %	≥40	85.52
24 hour release of TVOC	mg/m3	0.070
24 hour release of formaldehyde	mg/m3	0.005
24 hour release of benzene	mg/m3	0.001
24 hour release of TOL	mg/m3	0.005
24 hour release of xylene	mg/m3	0.070

Elastic Interlocking Tile

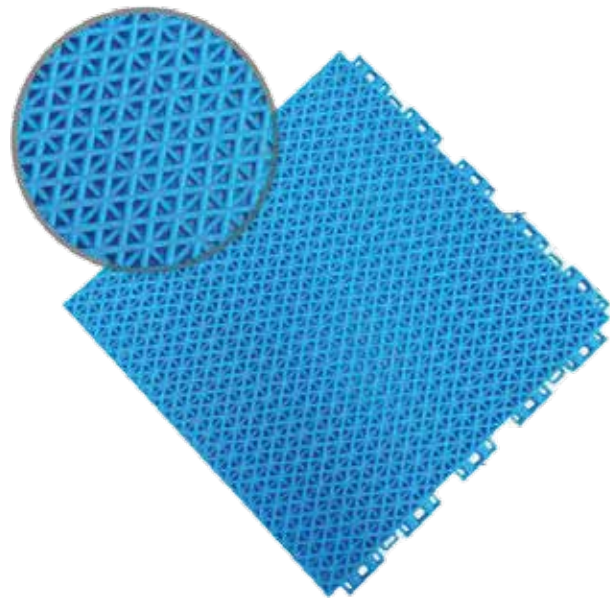

Model	DX17
Weight	250g/piece
Size	30.48*30.48*1.5cm
Packing Size	940*640*230mm
Recommended temperature range	-40° C 70° C
Main color	




Application: performance basketball courts, tennis courts, football fields, table tennis courts, volleyball courts, badminton courts

Model	DX13
Weight	340g/piece
Size	30.48*30.48*1.5cm
Packing Size	940*640*230mm
Recommended temperature range	-40° C 70° C
Main color	



Application: performance basketball courts, tennis courts, football fields, table tennis courts, volleyball courts, badminton courts

Elastic Interlocking Tile

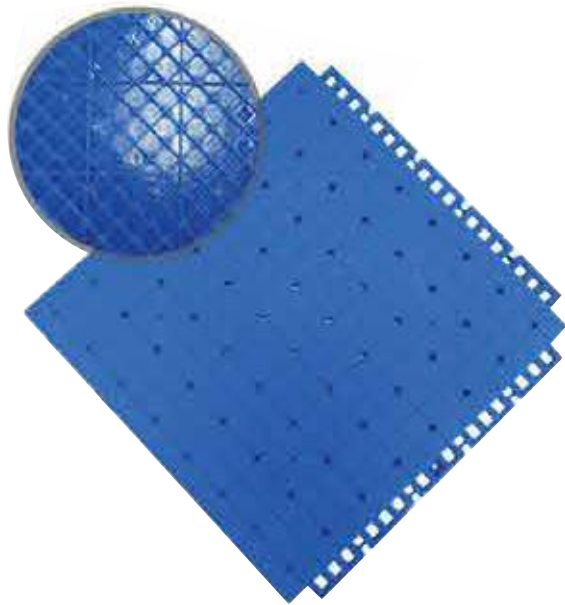


Model	DX11
Weight	370g/piece
Size	30.48*30.48*1.2cm
Packing Size	540*640*230mm
Recommended temperature range	-40° C 70° C
Main color	




Application: It is used for paving high performance basketball courts, tennis courts, football fields, table tennis courts, volleyball courts,

Model	DX15
Weight	330g/piece
Size	34*34*1.6cm
Packing Size	705*705*325mm
Recommended temperature range	-40° C 70° C
Main color	

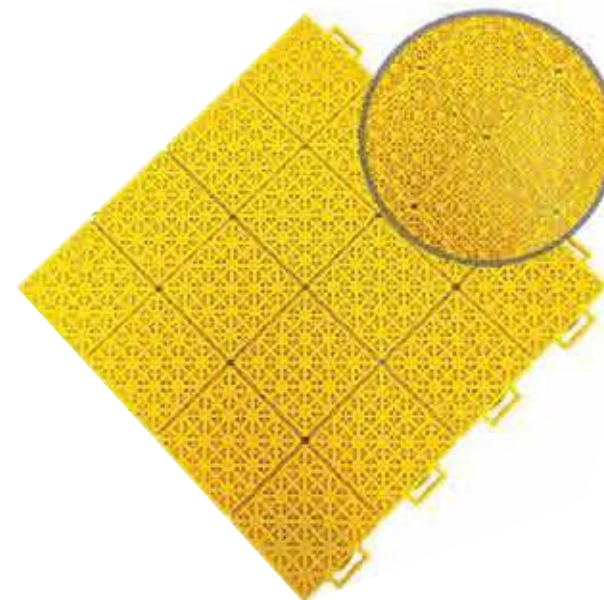

Application: It is used for paving high performance basketball courts, tennis courts, football fields, table tennis courts, volleyball courts.

Elastic Interlocking Tile

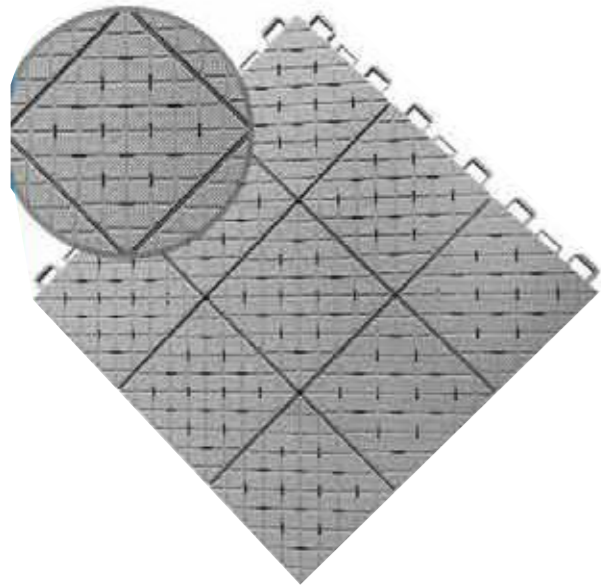


Model	DX27
Weight	380g/piece
Size	34*34*1.5cm
Packing Size	705*705*325mm
Recommended temperature range	-40° C 70° C
Main color	



Application: It is used for paving high performance basketball courts, tennis courts, football fields, table tennis courts, volleyball courts,

Model	DX12
Weight	450g/piece
Size	30.48*30.48*1.6cm
Packing Size	940*640*230mm
Recommended temperature range	-40° C 70° C
Main color	

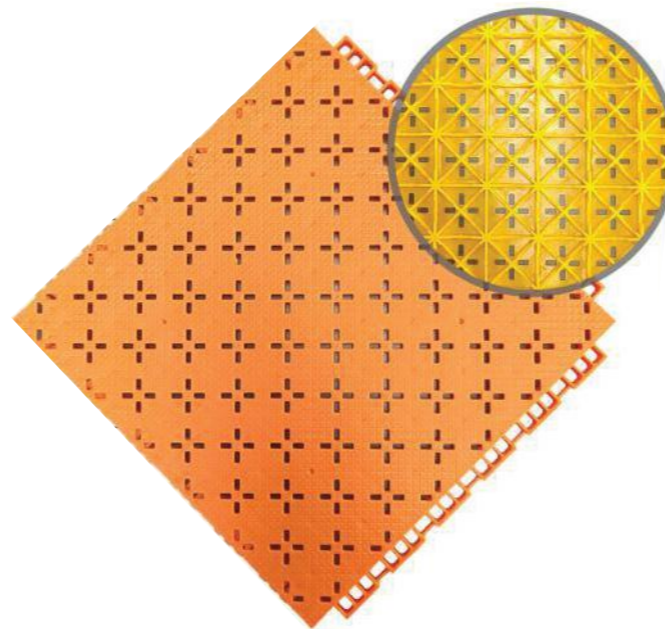

Application: badminton courts and other multi-functional courts

Elastic Interlocking Tile




Model	DX14
Weight	740g/piece
Size	50*50*1.5cm
Packing Size	1033*530*265mm
Recommended temperature range	-40° C 70° C
Main color	



Application: performance basketball courts, tennis courts, football fields, table tennis courts, volleyball courts, badminton courts

Model	DX08
Weight	223g/piece
Size	30.48*30.48*1.2cm
Packing Size	940*640*230mm
Recommended temperature range	-40° C 70° C
Main color	

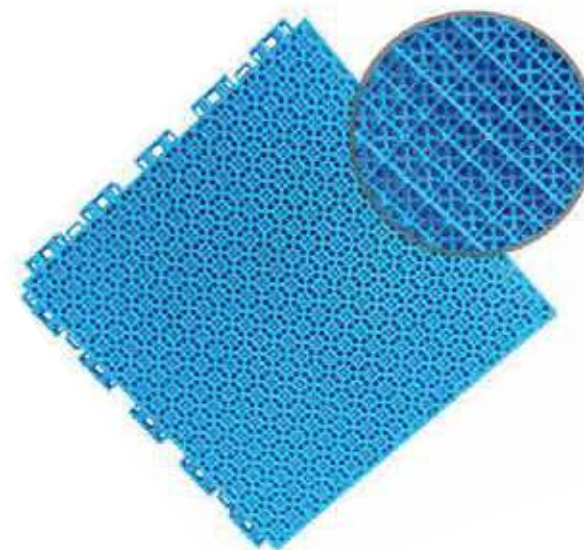

Application: performance basketball courts, tennis courts, football fields, table tennis courts, volleyball courts, badminton courts

Elastic Interlocking Tile





Model	DX24
Weight	1130g/piece
Size	58*58*1.6cm
Packing Size	580*580*450mm
Recommended temperature range	-40° C 70° C
Main color	




Application: performance basketball courts, tennis courts, football fields, table tennis courts, volleyball courts, badminton courts

Model	DX22
Weight	300g/piece
Size	30.48*30.48*1.6cm
Packing Size	940*640*230mm
Recommended temperature range	-40° C 70° C
Main color	

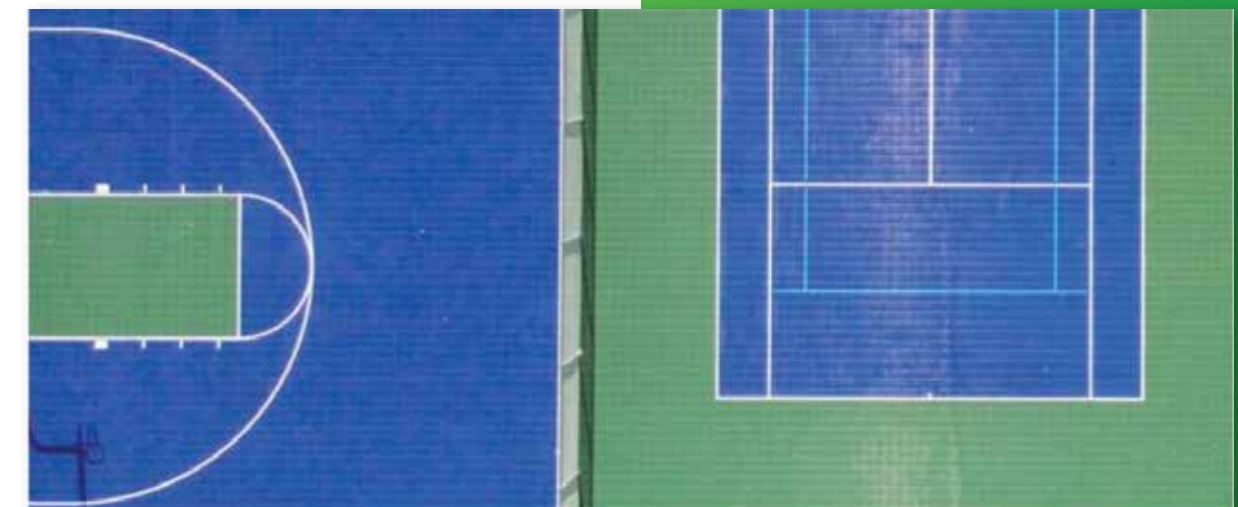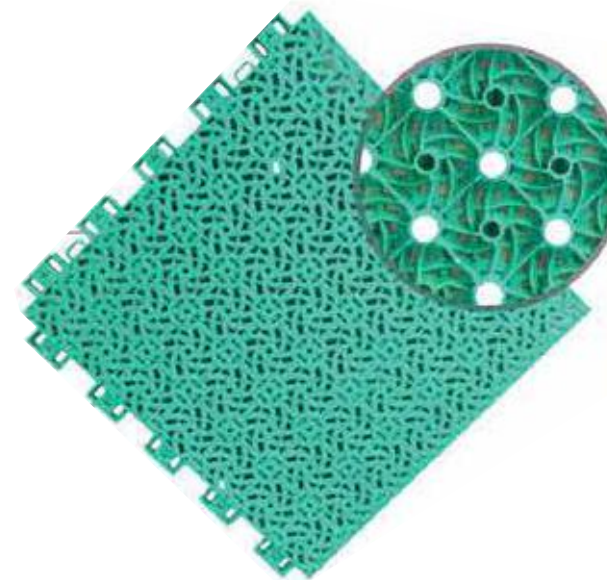

Application: performance basketball courts, tennis courts, football fields, table tennis courts, volleyball courts, badminton courts

Elastic Interlocking Tile

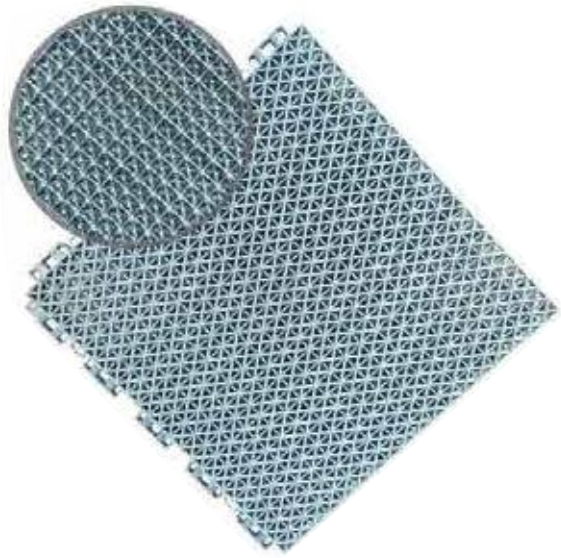

Model	DX18
Weight	210g/piece
Size	30.48*30.48*1.3cm
Packing Size	940*640*230mm
Recommended temperature range	-40° C 70° C
Main color	




Application: performance basketball courts, tennis courts, football fields, table tennis courts, volleyball courts, badminton courts

Model	DX25
Weight	340g/piece
Size	34*34*1.6cm
Packing Size	705*705*325mm
Recommended temperature range	-40° C 70° C
Main color	



Application: performance basketball courts, tennis courts, football fields, table tennis courts, volleyball courts, badminton courts

Elastic Interlocking Tile

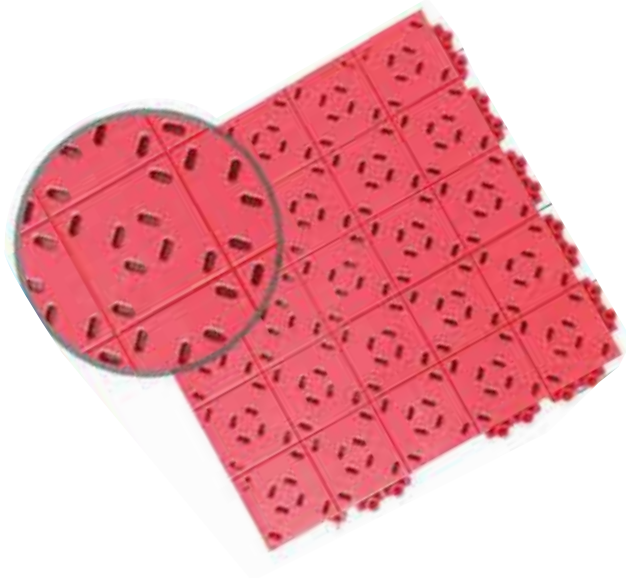


Model	DX04
Weight	317g/piece
Size	30.48*30.48*1.2cm
Packing Size	940*640*230mm
Recommended temperature range	-40° C 70° C
Main color	



Application: performance basketball courts, tennis courts, football fields, table tennis courts, volleyball courts, badminton courts

Model	DX05
Weight	1070g/piece
Size	30.48*30.48*2.3cm
Packing Size	940*640*230mm
Recommended temperature range	-40° C 70° C
Main color	

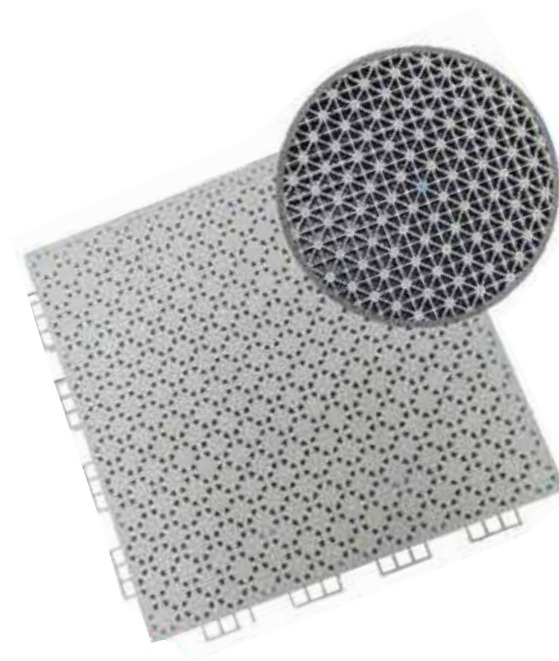


Application: performance basketball courts, tennis courts, football fields, table tennis courts, volleyball courts, badminton courts

Elastic Interlocking Tile


Installation method and instruction of Elastic Interlocking tile

1. Tile and tile edge structure

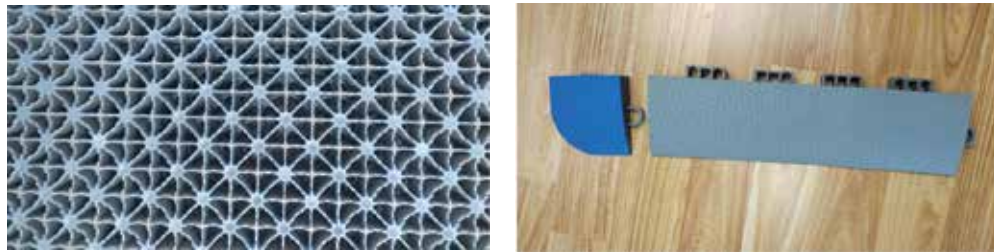

2. Installation method


(1) Take the upper left corner of the site as the starting point of installation, and A corner of the tile as the vertex of the upper left corner of the site

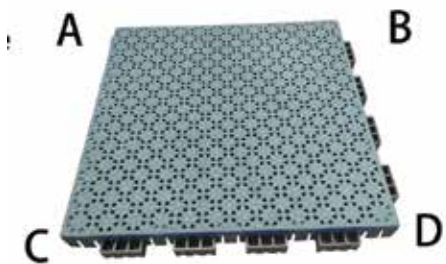

(2) Align the tile pins and buckles from left to right, then fix them with rubber hammer.




(3) Tile can be cut according to the ground on the spot, in order to achieve the desired effect

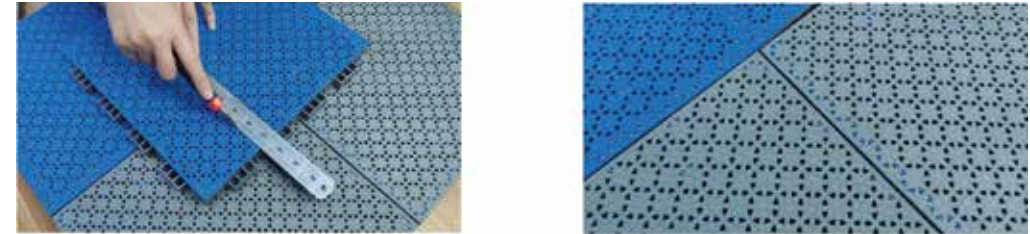

(4) Installation method of tile edge.
a. Install the edge of the tile (note the place direction between tile and tiles, tile with pins is connected to the tile with buckles) and connect tiles with pins to tile with buckles using a rubber hammer.




b. Install the four corners of the tile.

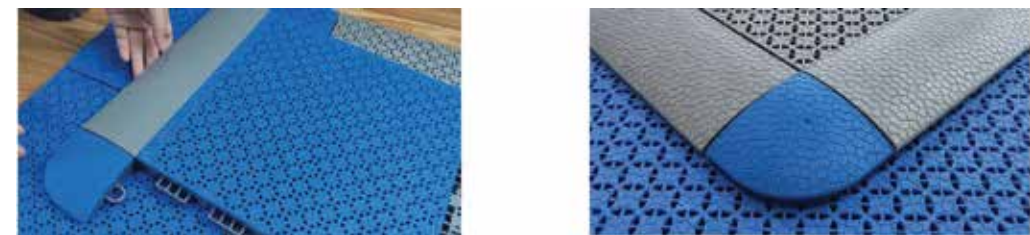


Installation Note

The pins and buckles must be aligned during installation to avoid tiles damage.

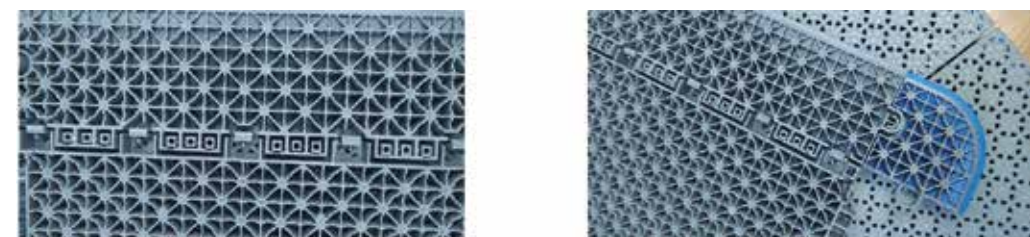


Badminton floor for Professional match

Granuels Pattern

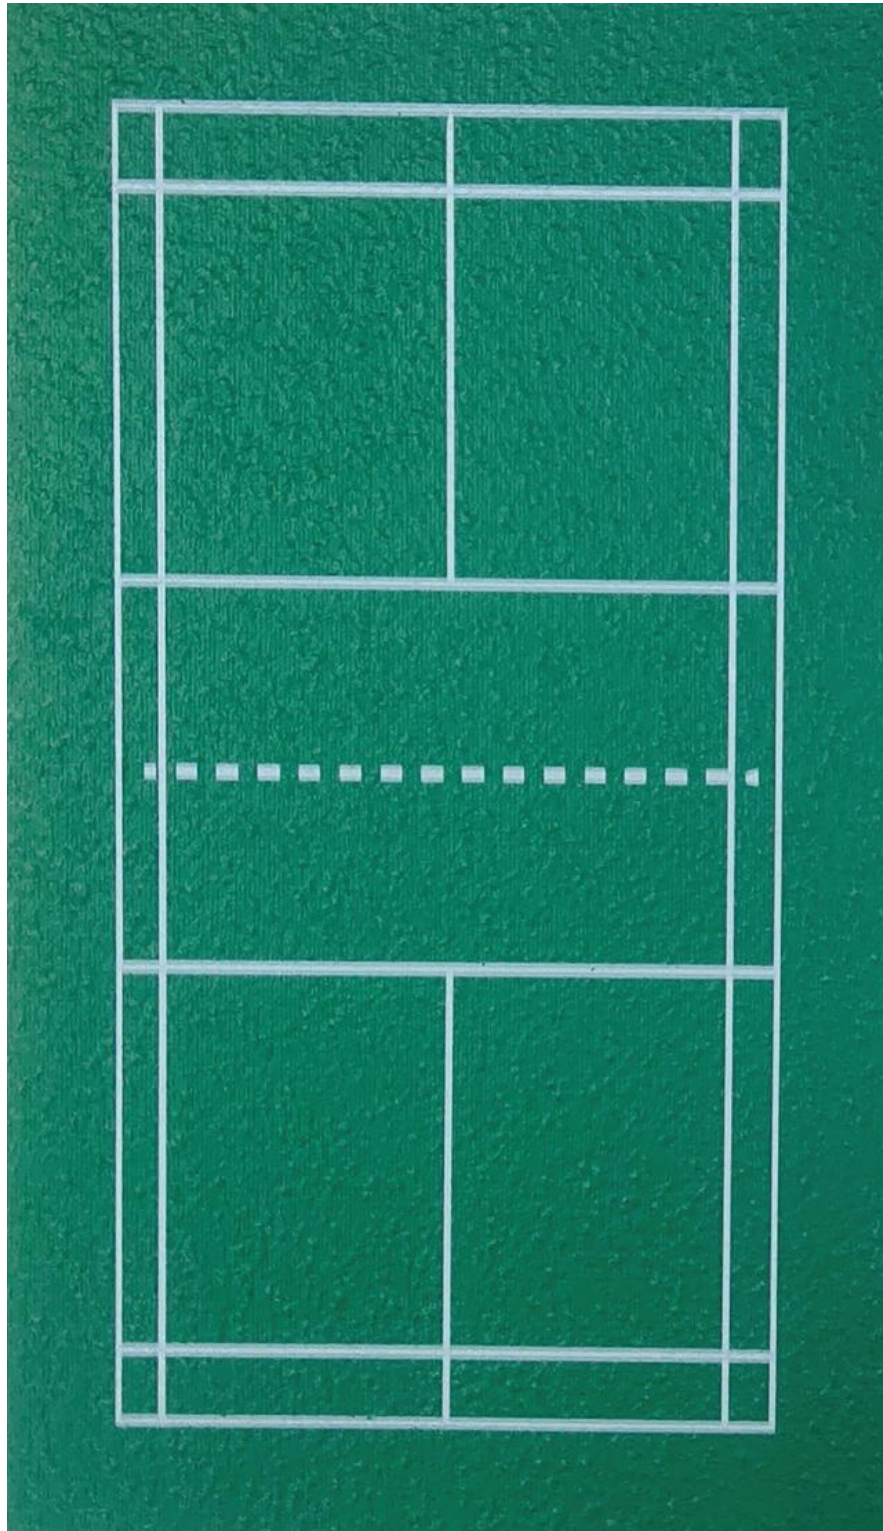

It's chemical resistance, oil resistance, tensile resistance, tear resistance, high calendaring performance, high yield strength, stain resistance, and easy to clean. Has good wear resistance and strengthens the surface hardness. Improve the antibacterial and sanitary performance. Extend the service life of the product.

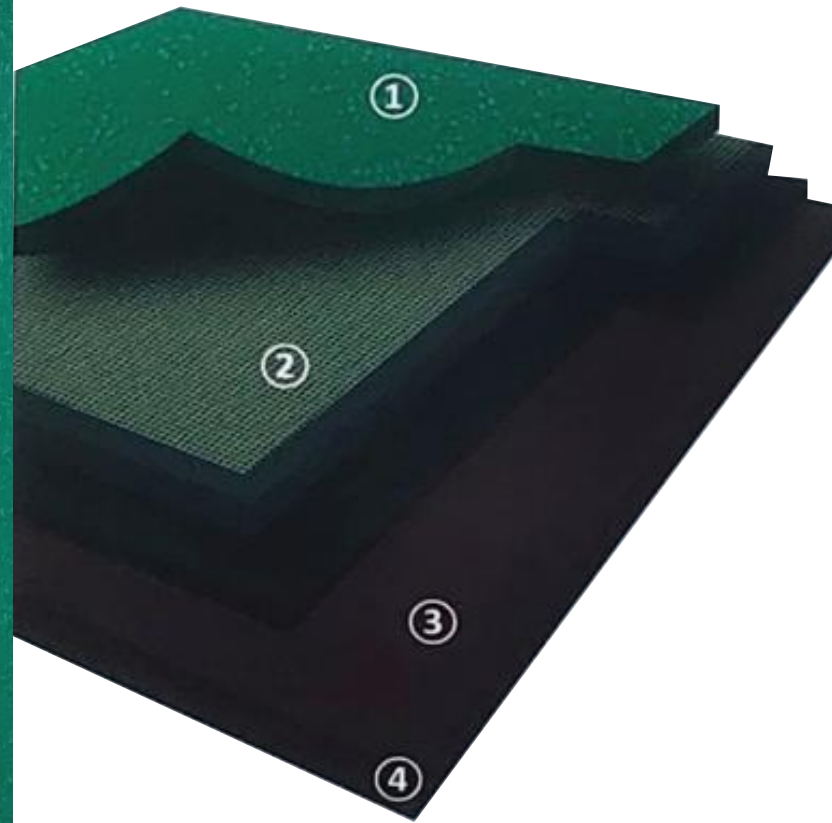


Has good performance in abrasive resistance, self-cleaning, and environmental protection. Excellent at resisting impact, anti-skidding, and shock absorption. Grade B1 antifoaming, immediately extinguish when away from the fire.

Technical data

Model	D868
Width	1.8m
Length	15m
Wear layer thickness	1.0mm
Thickness	4.8mm

Badminton Floor

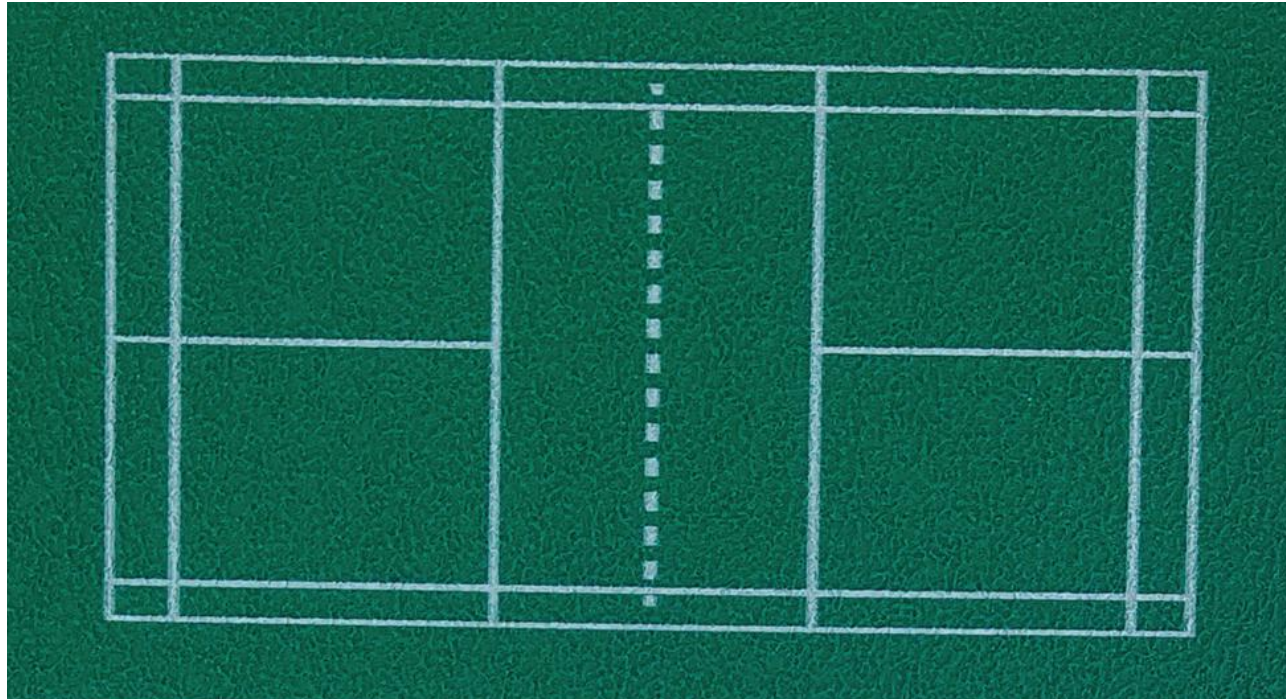

1309 Thickness: 5.1mm Width: 1.8m



1301 Thickness: 6.0mm Width: 1.8m / 1.5m



1326 Thickness: 4.5mm Width: 1.8m




1301 Thickness: 8.0mm Width: 1.8m / 1.5m



1578 Thickness: 4.5mm Width: 1.8m

Table Tennis Floor

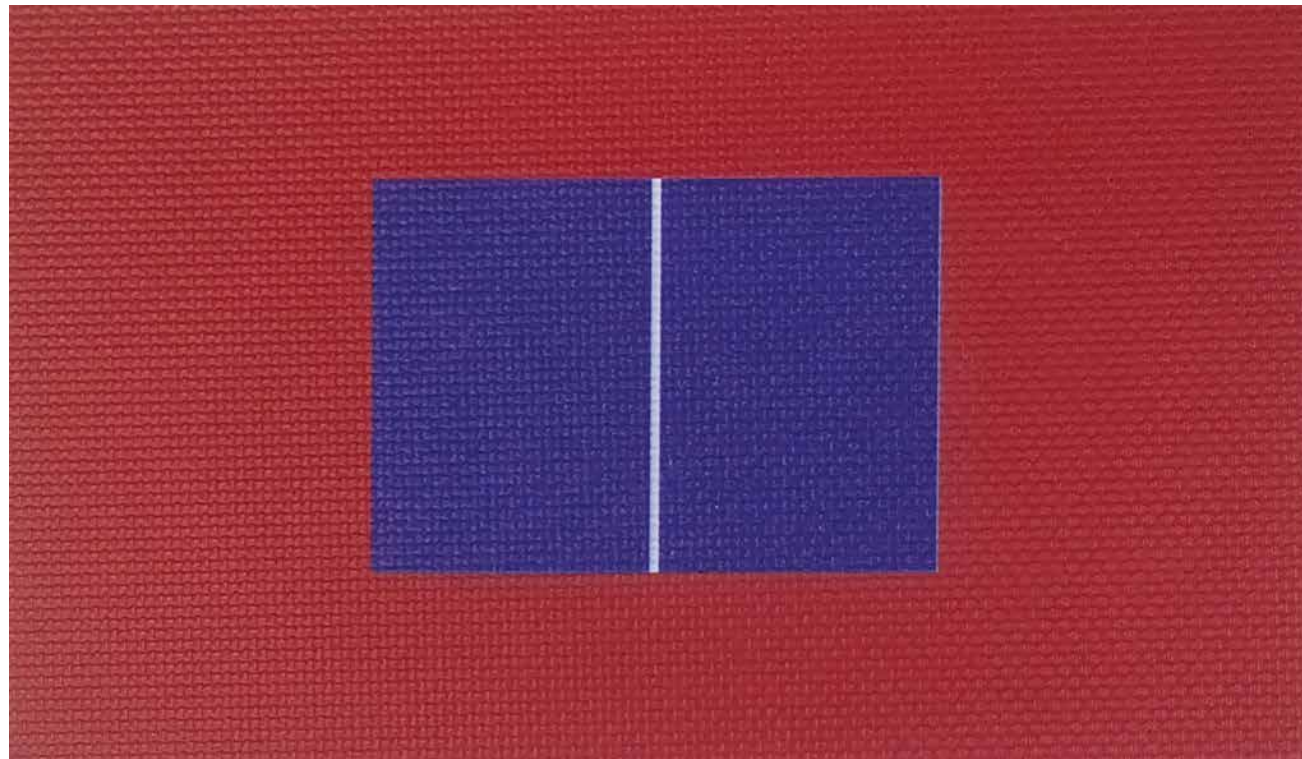

1303 Thickness: 4.5mm Width: 1.8m




1303 Thickness: 5mm Width: 1.8m



1336 Thickness: 4.5mm Width: 1.8m




1303 Thickness: 4.5mm Width: 1.8m

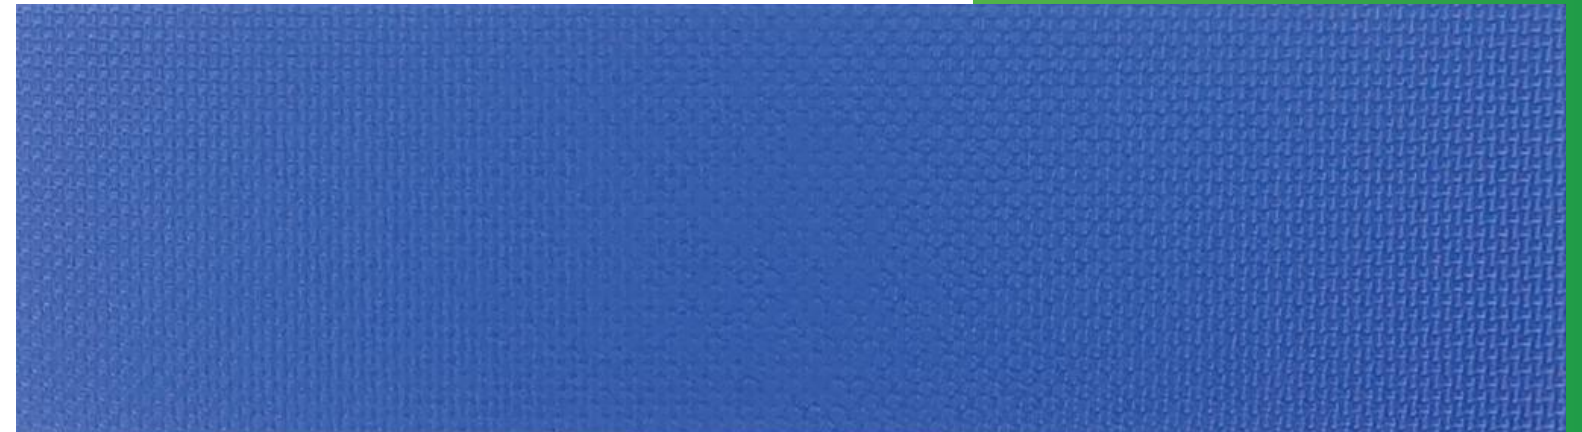

1303 Thickness: 4.5mm Width: 1.8m

Basketball Floor

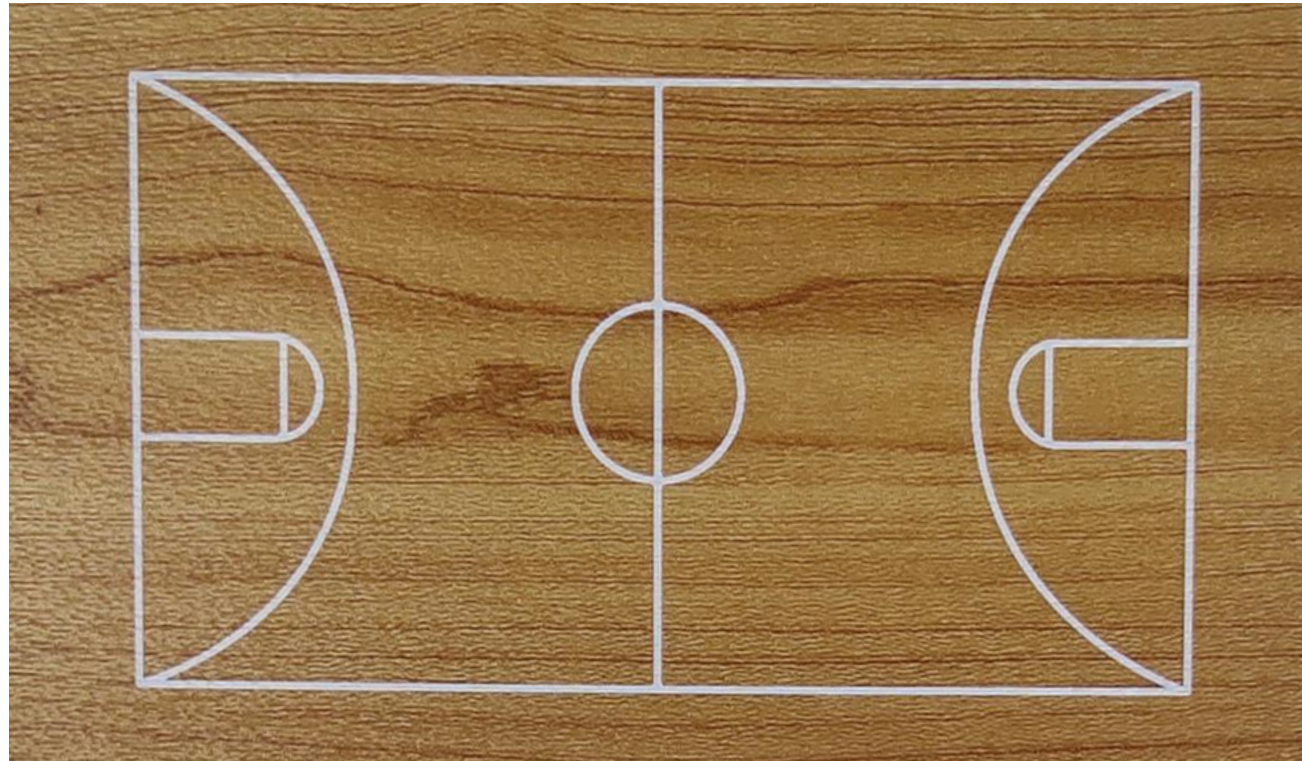

1323H Thickness: 6.0mm Width: 1.8m



1323X Thickness: 6.0mm Width: 1.8m



1323G Thickness: 6.0mm Width: 1.8m



1323H Thickness: 4.5mm Width: 1.8m




1323 Thickness: 4.5mm Width: 1.8m



1323 Thickness: 4.5mm Width: 1.8m

Tennis Floor

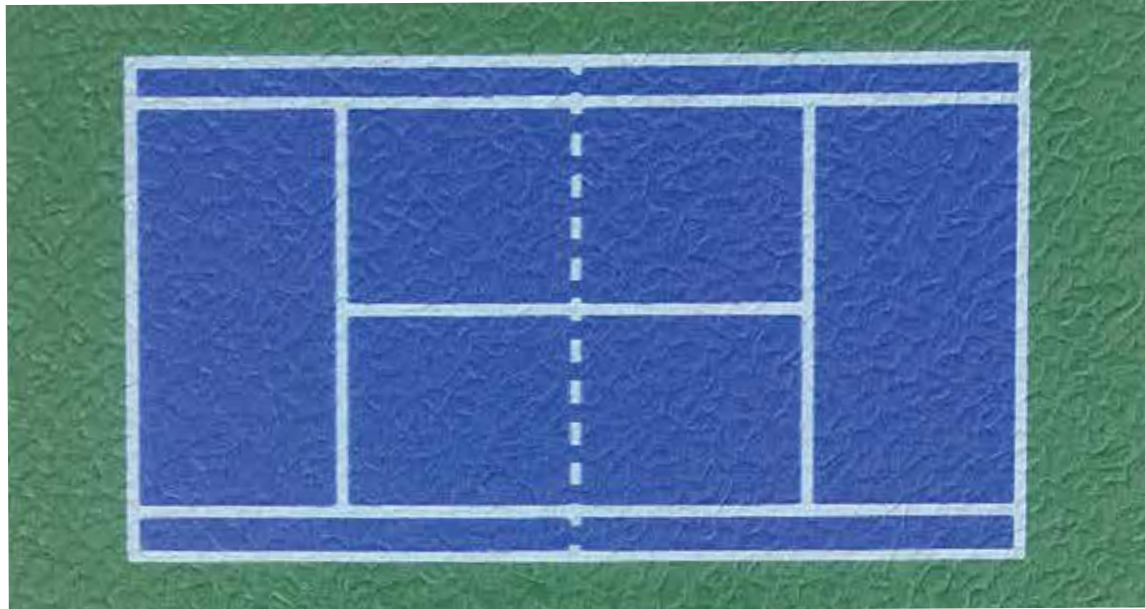

1320 Thickness: 6.0mm Width: 1.8m



778
Thickness: 7.0mm Width: 1.8m/1.5m/1.42m



1506 Thickness: 4.5mm Width: 1.8m



1506 Thickness: 4.5mm Width: 1.8m



1301 Thickness: 6.0mm Width: 1.8m/1.5m



1301 Thickness: 6.0mm Width: 1.8m/1.5m



778 Thickness: 7.0mm Width: 1.8m/1.5m/1.42m