



EZZOGENICS VINYL ROLL

LIEBERG SERIES



Call us now
6968 3098



admin@ezzogenics.com
david@ezzogenics.com



Bartley Biz Centre
Blk 15 Kaki Bukit Rd 4, #01-44,
S 417808

www.EZZOGENICS.com



LY-liyan


Heterogeneous Flooring

Creating better environments for
Hospital, School, Nursery, Hotel, Factory,
Transportation, Market, Public Buildings.

Technical specifications

Product Certifications & Categories	TEST	RESULT
Ground Wood Type 地材类型	ISO10581-EN649	Heterogeneous Sheet 高级商用弹性地板
Physical Test 物理测试	GB/T11982.2-2015	聚氯乙烯树脂
Product Standard		
Surface treatment 表面处理	-	UV 表面强化处理技术
Total thickness 总厚度	ISO24346-EN428	2.0mm (2.6mm可定制)
Weight per unit area 单位面积重量	ISO24341-EN426	3050g/m ²
Rolling width 卷宽	ISO24341-EN430	2m
Roll length 卷长	ISO24341-EN426	20 m
Wear thickness 耐磨层厚度	ISO24340-EN429	0.4 mm
Product Performance		
Detection of toxic and harmful substances 有毒有害物质检测	GB 18586-2001	通过PASS
DOP phthalate content DOP邻苯二甲酸盐含量	EN 14372: 2004	不含有
Heavy metals (soluble element content) 重金属(可溶性元素含量)	EN 71-3:2013+A3:2018	符合
SVHC(Substances of High Concern) SVHC(高关注物质)	REACH	不含163种以上的高关注物
Wear grade 耐磨等级	EN 649	T级
Adhesive content 粘合剂含量	EN ISO10582:2010	Type I 类
Welding strength 焊接强度	GB/T 11982.1-2015[EN 684]	平均值 > 500N/50mm
Stripping resistance 抗剥离力	GB/T 11982.1-2015	平均值 > 50N/50mm
		最小值 > 40N/50mm
Residual depression 残余凹陷	GB/T 11982.1-2015[EN 433]	< 0.1mm
Roller test 滚轮测试	GB/T 11982.1-2015[EN 425]	适合
Flexibility property 柔韧性能	GB/T 11982.1-2015[EN 435]	无开裂
Crimp degree under heat 受热卷曲度	GB/T 11982.1-2015	< 5mm
Dimensional stability 尺寸稳定性	GB/T 11982.1-2015[EN 434]	X纵向≤0.4% ; Y纵向≤0.4%
Combustion performance class 燃烧性能等级	GB8624-2012	B ₁ [B-s1]级
	EN13501-1	Class Bf1 s1
Colour fastness 色牢度	ENISO 105-802	≥6级
Chemical resistance 抗化学性能	ISO26987-EN423	0级 (无污染)
Anti-slip test 防滑测试	DIN 51130	防湿滑性 ≥R9级
	EN13893	防干滑性 μ≥0.3
Electrostatic load 静电负荷	EN 1815	<2 kV
Thermal resistance 热阻值	EN ISO 10456	0.02m ² K/W
Geothermal system 地热系统	ISO 10140/ISO 717-2	适合
Sound absorption 吸音	-	6db
Color 颜色选择		14





Size: 2.0 mm × 2.0m × 20m



LG-00802

Sandy Beige



LG-00804

Thistle




LG-00823

Misty Gray



LG-00809

Beige

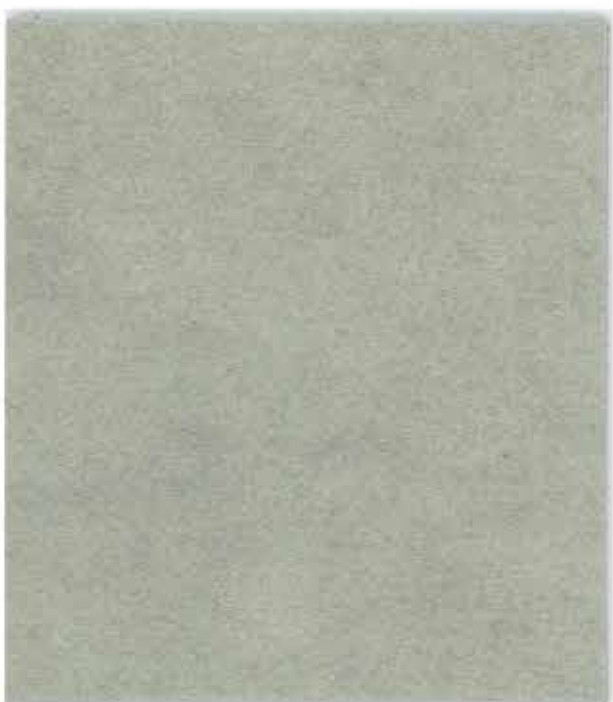

LG-00811

Smoky Gray



LG-00805

Chesnut



LG-00806

Charcoal Gray



Size: 2.0 mm × 2.0m × 20m



LG-00822

Pale Goldenrod



LG-00807

Butter



LG-00801

DarkKhaki



LG-00824

Navy Blue



LG-00810

Olive Green



LG-00812

Cambridge Blue



LG-00813

Turquoise Blue



LX-li xuan

Homogeneous Flooring

**Creating better environments for
Hospital, School, Nursery, Hotel, Factory,
Transportation, Market, Public Buildings.**

Technical specifications

Product Certifications & Categories	TEST	RESULT
Ground Wood Type 地材类型	ISO10581-EN649	Homogeneous Flooring 同质透心商用地面材料
Physical Test 物理测试	GB/T11982.2-2015	聚氯乙烯树脂

Product Standard

Surface treatment 表面处理	-	PUR 表面强化处理技术
Total thickness 总厚度	ISO24346-EN428	2.0mm
Weight per unit area 单位面积重量	ISO24341-EN426	2850g/m ²
Rolling width 卷宽	ISO24341-EN430	2m
Roll length 卷长	ISO24341-EN426	20m

Product Performance

Detection of toxic and harmful substances 有毒有害物质检测	GB 18586-2001	通过PASS
DOP phthalate content DOP邻苯二甲酸盐含量	EN 14372: 2004	不含有
Heavy metals (soluble element content) 重金属(可溶性元素含量)	EN 71-3:2013+A3:2018	符合
SVHC(Substances of High Concern) SVHC(高关注物质)	REACH	不含163种以上的高关注物
Wear grade 耐磨等级	EN 649	T级
Adhesive content 粘合剂含量	EN ISO10582:2010	Type I 类
Welding strength 焊接强度	GB/T 11982.1-2015(EN 684)	平均值 > 500N/50mm
Stripping resistance 抗剥离力	GB/T 11982.1-2015	平均值 > 50N/50mm 最小值 > 40N/50mm
Residual depression 残余凹陷	GB/T 11982.1-2015(EN 433)	< 0.1mm
Roller test 滚轮测试	GB/T 11982.1-2015(EN 425)	适合
Flexibility property 柔韧性	GB/T 11982.1-2015(EN 435)	无开裂
Crimp degree under heat 受热卷曲度	GB/T 11982.1-2015	< 5mm
Dimensional stability 尺寸稳定性	GB/T 11982.1-2015(EN 434)	X横向≤0.4% ; Y纵向≤0.4%
Combustion performance class 燃烧性能等级	GB8624-2012	B ₁ [B-s1]级
	EN13501-1	Class Bf1 s1
Colour fastness 色牢度	ENISO 105-802	≥6级
Chemical resistance 抗化学性能	ISO26987-EN423	0级 (无污染)
Anti-slip test 防滑测试	DIN 51130	防滑滑性 ≥R9级
	EN13893	防干滑性 μ≥0.3
Electrostatic load 静电负荷	EN 1815	<2 kV
Thermal resistance 热阻值	EN ISO 10456	0.02m ² K/W
Geothermal system 地热系统	ISO 10140/ISO 717-2	适合
Sound absorption 吸音	-	6db
Color 颜色选择		27

*本宣传册所示图片中的产品色样仅供参考，实际颜色和图案以实样为准。





 Size: **2.0 mm × 2.0m × 20m**



LG-20038




LG-20026




LG-20039



LG-20035

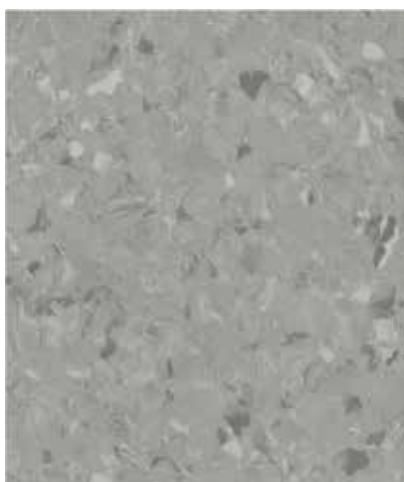

LG-30040

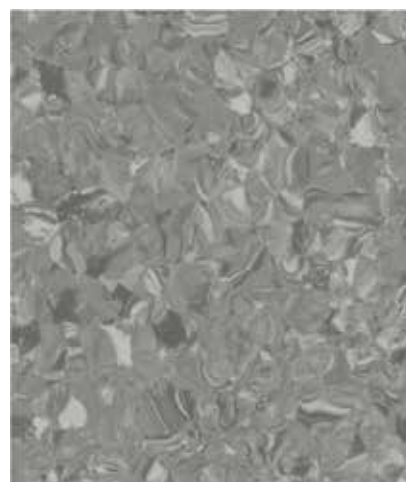


LG-20014




LG-20037



LG-20647

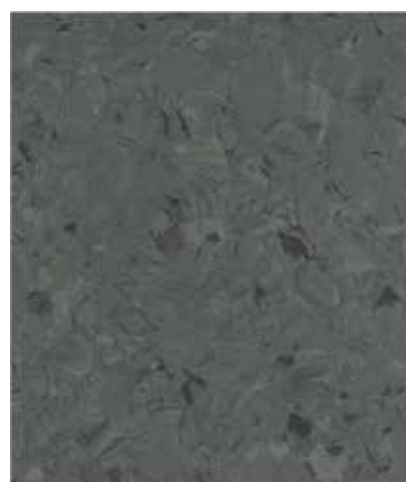

LG-20012



 Size: **2.0 mm × 2.0m × 20m**



LG-20648



LG-20036



LG-20004



LG-20645



LG-20646



LG-20005



LG-20062



LG-20018



LG-20065




 Size: **2.0 mm × 2.0m × 20m**




LG-20649




LG-20010

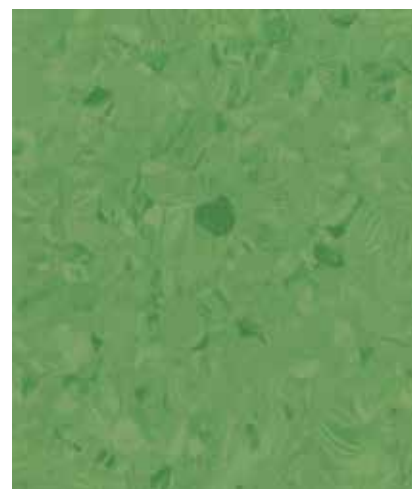


LG-20011

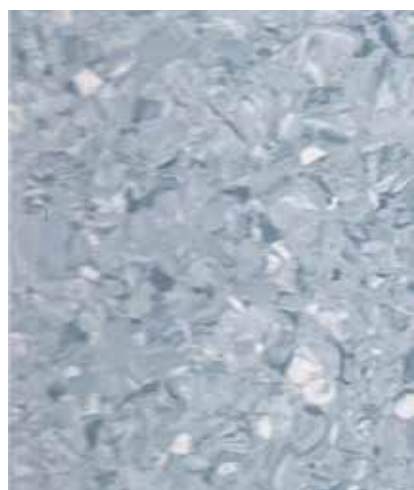


LG-20056

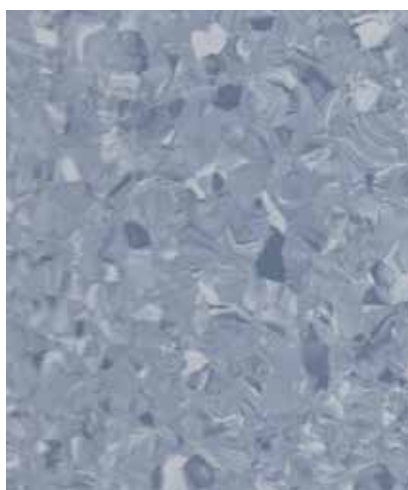


LG-20067

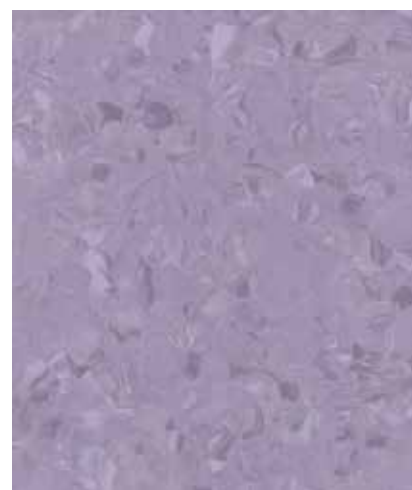


LG-20008

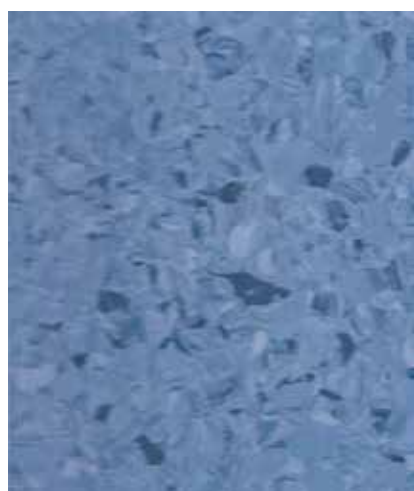

LG-20730

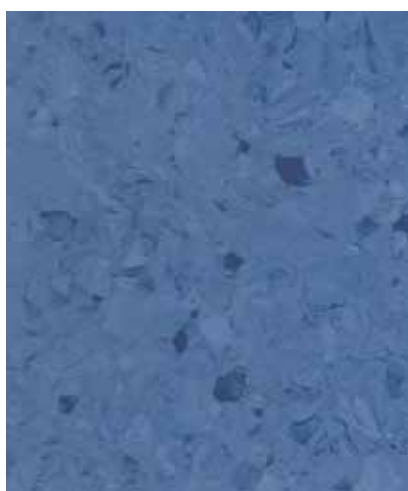

LG-20731

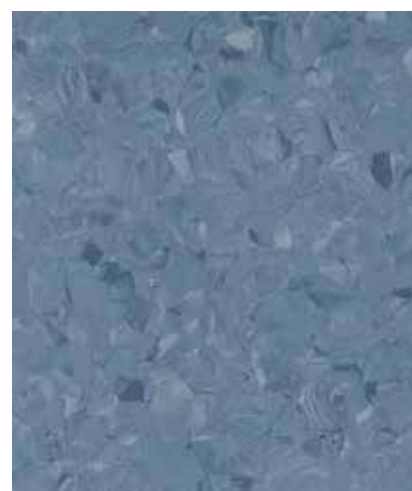

LG-20016



BE-Beauty

Homogeneous Flooring

Creating better environments for
Hospital, School, Nursery, Hotel, Factory,
Transportation, Market, Public Buildings.

Technical specifications

Product Certifications & Categories	TEST	RESULT
Ground Wood Type 地材类型	ISO10581-EN649	Homogeneous Sheet 同质透心商用地面材料
Physical Test 物理测试	GB/T11982.2-2015	聚氯乙烯树脂
Product Standard		
Surface treatment 表面处理	-	PUR 表面强化处理技术
Total thickness 总厚度	ISO24346-EN428	2.0 mm
Rolling width 卷宽	ISO24341-EN430	2m
Roll length 卷长	ISO24341-EN426	20m
Product Performance		
Detection of toxic and harmful substances 有毒有害物质检测	GB 18586-2001	通过PASS
DOP phthalate content DOP邻苯二甲酸盐含量	EN 14372: 2004	不含有
Heavy metals (soluble element content) 重金属(可溶性元素含量)	EN 71-3:2013+A3:2018	符合
SVHC(Substances of High Concern) SVHC(高关注物质)	REACH	不含163种以上的高关注物
Adhesive content 粘合剂含量	EN ISO10582:2010	Type I 类
Welding strength 焊接强度	GB/T 11982.1-2015[EN 684]	平均值 > 500N/50mm
Stripping resistance 抗剥离力	GB/T 11982.1-2015	平均值 > 50N/50mm 最小值 > 40N/50mm
Residual depression 残余凹陷	GB/T 11982.1-2015[EN 433]	< 0.1mm
Roller test 滚轮测试	GB/T 11982.1-2015[EN 425]	适合
Flexibility property 柔韧性能	GB/T 11982.1-2015[EN 435]	无开裂
Crimp degree under heat 受热卷曲度	GB/T 11982.1-2015	< 5mm
Dimensional stability 尺寸稳定性	GB/T 11982.1-2015[EN 434]	X横向≤0.4%；Y纵向≤0.4%
Combustion performance class 燃烧性能等级	GB8624-2012	B ₁ (B-s1)级
	EN13501-1	Class Bf1 s1
Colour fastness 色牢度	ENISO 105-802	≥6级
Chemical resistance 抗化学性能	ISO26987-EN423	0级 (无污染)
Anti-slip test 防滑测试	DIN 51130	防滑湿性 ≥R9级
	EN13893	防滑干性 μ≥0.3
Electrostatic load 静电负荷	EN 1815	<2 kV
Thermal resistance 热阻值	EN ISO 10456	0.02m²K/W
Geothermal system 地热系统	ISO 10140/ISO 717-2	适合
Sound absorption 吸音	-	6db
Color 颜色选择		37





Environment friendly



Waterproof



Anti-slip



Easy-care



Comfortable feel feeling



Fire retardant



Acoustic



Size: 2.0 mm x 2.0m x 20m



LG-7329

Beige



LG-7330

Cream



LG-7331

Bisque



LG-7317

Lividity



LG-7332

Cinnamon



LG-7318

Camel



LG-7319

Driftwood



LG-7333

Sienna Blend



LG-7328

Concrete Grey



LG-7321

Misty Grey



LG-7322

Elderberry



LG-7323

Charcoal



Environment friendly



Waterproof



Anti-slip



Easy-care



Comfortable feel feeling




Fire retardant



Acoustic



Size: 2.0 mm × 2.0m × 20m

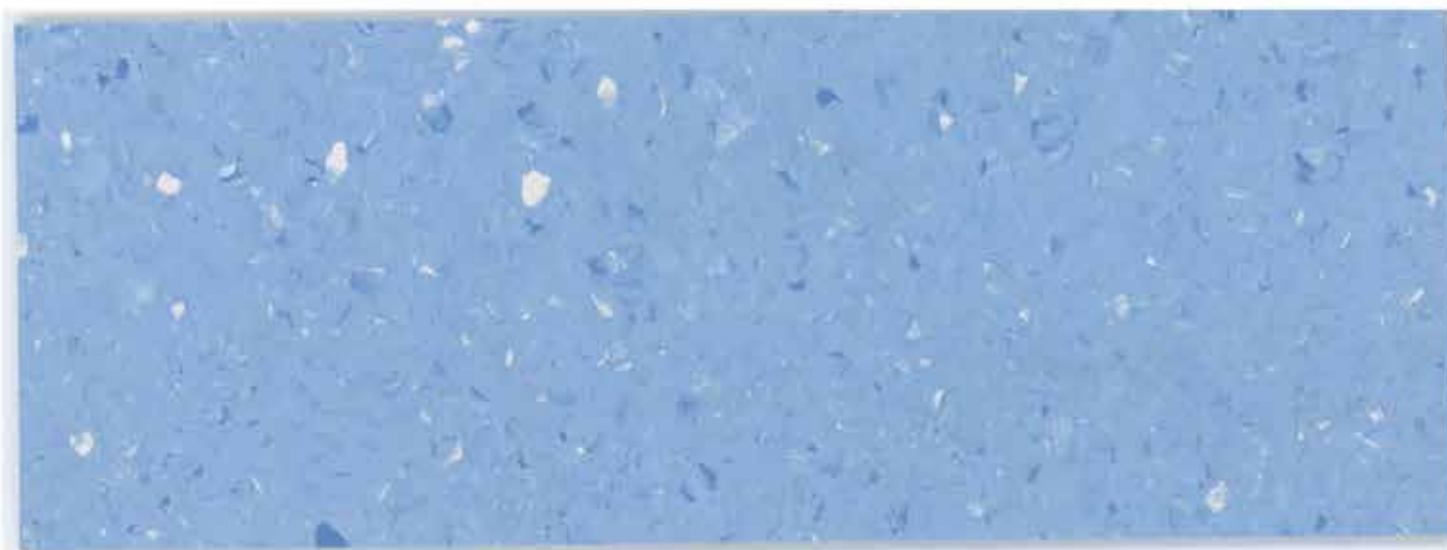

LG-7337

Cadet Blue



LG-7340

Pale Cerulean




LG-7341

Moon Blue



LG-7342

Rose Violet



LG-7311

Amethyst




LG-7301

Sky Blue



LG-7315

Peacock Blue



LG-7302

Bright Blue



LG-7303

Sea Blue



LG-7336

Sapphire



LG-7304

Royal Blue



LG-7343

Prussian Blue



LG-7344

Purplish Blue



LD-liddy

Heterogeneous Flooring

Creating better environments for
Hospital, School, Nursery, Hotel, Factory,
Transportation, Market, Public Buildings.

Technical specifications

Product Certifications & Categories	TEST	RESULT
Ground Wood Type 地材类型	ISO10581-EN649	Heterogeneous Sheet 高级商用弹性地板
Physical Test 物理测试	GB/T11982.2-2015	聚氯乙烯树脂


Product Standard

Surface treatment 表面处理	-	UV 表面强化处理技术
Total thickness 总厚度	ISO24346-EN428	2.0mm / 3.0mm
Weight per unit area 单位面积重量	ISO24341-EN426	2900 / 3600g/m ²
Rolling width 卷宽	ISO24341-EN430	2m
Roll length 卷长	ISO24341-EN426	20 / 15m
Wear thickness 耐磨层厚度	ISO24340-EN429	0.4 / 0.6mm

Product Performance

Detection of toxic and harmful substances 有毒有害物质检测	GB 18586-2001	通过PASS
DOP phthalate content DOP邻苯二甲酸盐含量	EN 14372: 2004	不含有
Heavy metals (soluble element content) 重金属(可溶性元素含量)	EN 71-3:2013+A3:2018	符合
SVHC(Substances of High Concern) SVHC(高关注物质)	REACH	不含163种以上的高关注物
Wear grade 耐磨等级	EN 649	T级
Adhesive content 粘合物含量	EN ISO10582:2010	Type I 类
Welding strength 焊接强度	GB/T 11982.1-2015[EN 684]	平均值 > 500N/50mm
Stripping resistance 抗剥离力	GB/T 11982.1-2015	平均值 > 50N/50mm
		最小值 > 40N/50mm
Residual depression 残余凹陷	GB/T 11982.1-2015[EN 433]	< 0.1mm
Roller test 滚轮测试	GB/T 11982.1-2015[EN 425]	适合
Flexibility property 柔韧性能	GB/T 11982.1-2015[EN 435]	无开裂
Crimp degree under heat 受热卷曲度	GB/T 11982.1-2015	< 5mm
Dimensional stability 尺寸稳定性	GB/T 11982.1-2015[EN 434]	X纵向 ≤0.4% ; Y纵向 ≤0.4%
Combustion performance class 燃烧性能等级	GB8624-2012	B ₁ [B-s1]级
	EN13501-1	Class Bf1 s1
Colour fastness 色牢度	ENISO 105-802	≥6级
Chemical resistance 抗化学性能	ISO26987-EN423	0级 (无污染)
Anti-slip test 防滑测试	DIN 51130	防滑性 ≥R9级
	EN13893	防干滑性 μ≥0.3
Electrostatic load 静电负荷	EN 1815	<2 kV
Thermal resistance 热阻值	EN ISO 10456	0.02m ² K/W
Geothermal system 地热系统	ISO 10140/ISO 717-2	适合
Sound absorption 吸音	-	6db
Color 颜色选择		21





 Size: **2.0 mm × 2.0m × 20m**



LG-12515-02

White Smoke



LG-12527-02

Columbo Grass



LG-12518-01

Cream



LG-12525-02

Vitelline



LG-12505-02

Nido Teal



LG-12516-01

Straw Yellow



LG-12506-01

Midium Yellow




LG-12507-01

Sandy Brown



LG-12517-01

Salmon Pink



 Size: **2.0 mm × 2.0m × 20m**



LG-12528-02

Pale Grey



LG-12501-02

Moon Light



LG-12502-02

Sky Grey




LG-12504-02

Slate Gray



LG-12503-02

Charcoal Gray



 Size: 2.0 mm × 2.0m × 20m



LG-12508-02

Medium Blue



LG-12510-01

Pale Green



LG-12521-01

Turquoise Blue




LG-12526-02

Dodger Blue



LG-12522-01

Sea Green

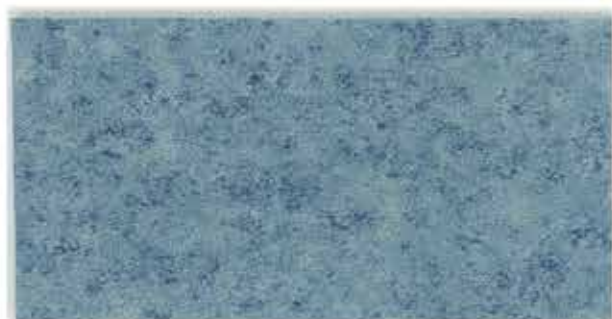

LG-12509-02

Steel Blue



LG-12523-01

Royal Blue



LY-liya

Heterogeneous Flooring

**Creating better environments for
Hospital, School, Nursery, Hotel, Factory,
Transportation, Market, Public Buildings.**

Technical specifications


Product Certifications & Categories	TEST	RESULT
Ground Wood Type 地材类型	ISO10581-EN649	Heterogeneous Sheet 高级商用弹性地板
Physical Test 物理测试	GB/T11982.2-2015	聚氯乙烯树脂
Product Standard		
Surface treatment 表面处理	-	UV 表面强化处理技术
Total thickness 总厚度	ISO24346-EN428	2.0 mm
Weight per unit area 单位面积重量	ISO24341-EN426	3200g/m ²
Rolling width 卷宽	ISO24341-EN430	2m
Roll length 卷长	ISO24341-EN426	20 m
Wear thickness 耐磨层厚度	ISO24340-EN429	0.4mm
Product Performance		
Detection of toxic and harmful substances 有毒有害物质检测	GB 18586-2001	通过PASS
DOP phthalate content DOP邻苯二甲酸盐含量	EN 14372: 2004	不含有
Heavy metals (soluble element content) 重金属(可溶性元素含量)	EN 71-3:2013+A3:2018	符合
SVHC(Substances of High Concern) SVHC(高关注物质)	REACH	不含163种以上的高关注物
Wear grade 耐磨等级	EN 649	T级
Adhesive content 粘合剂含量	EN ISO10582:2010	Type I 类
Welding strength 焊接强度	GB/T 11982.1-2015[EN 684]	平均值 > 500N/50mm
Stripping resistance 抗剥离力	GB/T 11982.1-2015	平均值 > 50N/50mm
		最小值 > 40N/50mm
Residual depression 残余凹陷	GB/T 11982.1-2015[EN 433]	< 0.1mm
Roller test 滚轮测试	GB/T 11982.1-2015[EN 425]	适合
Flexibility property 柔韧性能	GB/T 11982.1-2015[EN 435]	无开裂
Crimp degree under heat 受热卷曲度	GB/T 11982.1-2015	< 5mm
Dimensional stability 尺寸稳定性	GB/T 11982.1-2015[EN 434]	X纵向≤0.4%；Y纵向≤0.4%
Combustion performance class 燃烧性能等级	GB8624-2012	B ₁ [B-s1]级
	EN13501-1	Class Bf1 s1
Colour fastness 色牢度	ENISO 105-802	≥6级
Chemical resistance 抗化学性能	ISO26987-EN423	0级（无污染）
Anti-slip test 防滑测试	DIN 51130	防湿滑性 ≥R9级
	EN13893	防干滑性 μ≥0.3
Electrostatic load 静电负荷	EN 1815	<2 kV
Thermal resistance 热阻值	EN ISO 10456	0.02m ² K/W
Geothermal system 地热系统	ISO 10140/ISO 717-2	适合
Sound absorption 吸音	-	6db
Color 颜色选择		14





 Size: **2.0 mm** × **2.0m** × **20m**





Size: 2.0 mm × 2.0m × 20m

www.ezzogenics.com



LG-25504

Shimmer Lace



LG-25501

Shimmer Concrete



LG-25505

Pigeon



LG-25502

Dark Neutral Grey



LG-25506

Shimmer Pigeon




LG-25503

Contrast Mortar



LG-25515

Shimmer Ebony



Size: 2.0 mm × 2.0m × 20m



LG-25508

Daffodil



LG-25511

Dandelion



LG-25512

Contrast Amber




LG-25516

Lime




LG-25513

Shimmer Mysticblue

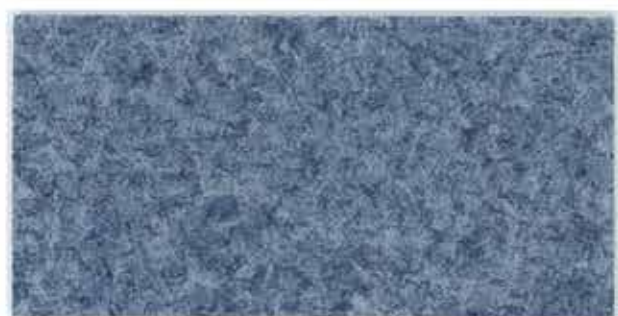

LG-25514

Deep Sea

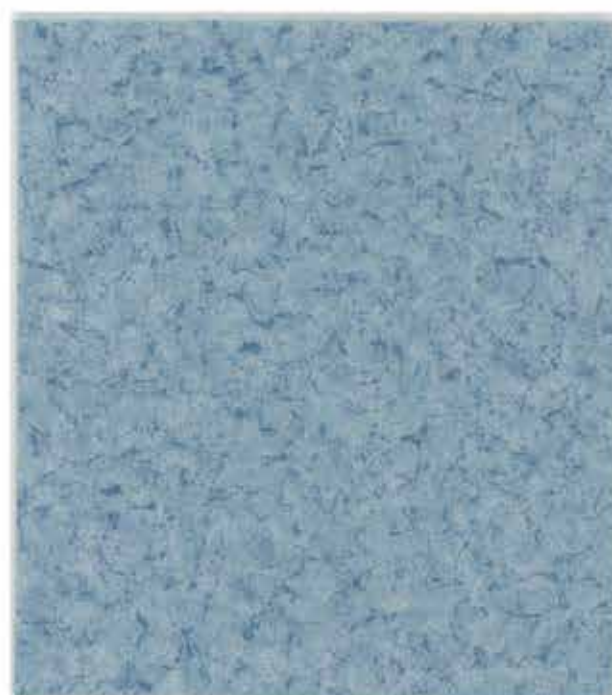

LG-25507

Vivid Ice