



EZZO COLLECTION DOORS, WINDOWS & SKYLIGHTS

Designed for Light, Built for Living

Product Catalogue 2026



Bartley Biz Centre
Blk 15 Kaki Bukit Rd 4, #01-44 Singapore 417808
admin@ezzogenics.com | david@ezzogenics.com

www.ezzo.sg

About Our Company




EZZODOORS is a premium brand under Ezzogenics, specializing in high-quality modern aluminum windows and doors. We bring together advanced manufacturing technology, architectural expertise, and meticulous craftsmanship to deliver products that enhance both the aesthetics and functionality of any space.

100 +
PROJECTS
COMPLETED



With a focus on sustainability, innovation, and customer satisfaction, EZZODOORS has established itself as a trusted name in the industry. We don't just supply windows and doors—we deliver complete solutions backed by professional installation services and ongoing support.

Product Features

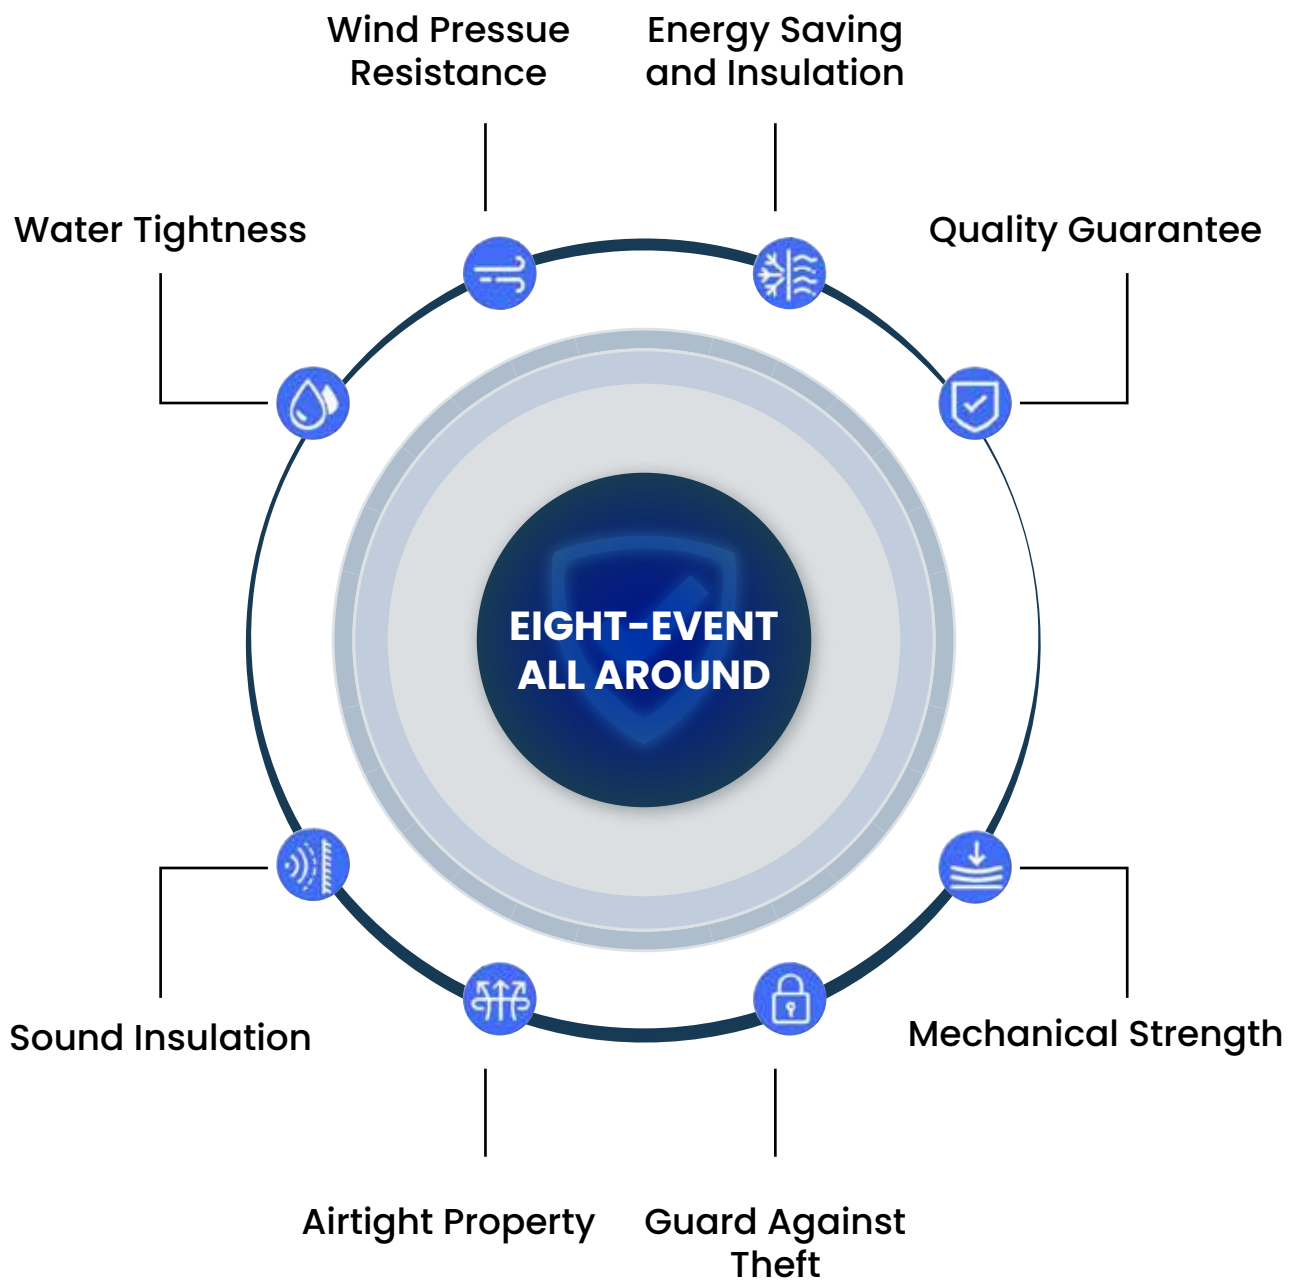

Customer Service Process Flow



Initial Communication Phase

Customer Inquiry ▶ Requirement ▶ Site Visit ▶ Quotation




Order Execution Phase

Contract Signing ▶ Make Deposit ▶ Production Scheduling




Production Phase

Manufacturing ▶ Quality Inspection ▶ Acceptance



Delivery Phase

Packing & Shipping ▶ Customs Clearance ▶ Delivery & Receipt



On-site Installation Phase

Supply Labor ▶ Installation Guidance ▶ Customer Acceptance



After-sales Service

After-sales Service ▶ Requirement Updates ▶ Repeat Cooperation

Table of CONTENTS



SYSTEM WINDOW SERIES

Casement window (PRO110/590/120 series, curtain wall window) _ _ _ _ _	8 - 13
Sliding window (112/123 series, 130side pressure window) _ _ _ _ _	14 - 19
Folding window (65/40/55/60 Series) _ _ _ _ _	20 - 24
American window (50/70/83 series) _ _ _ _ _	25 - 27
Electric lift window (125/158 series) _ _ _ _ _	28 - 29

SYSTEM DOOR SERIES

Heavy Sliding Door (E190/E127/TY120/TY150 series, 180 arc series) _ _ _ _ _	31 - 39
Folding Door (65/68/80 series) _ _ _ _ _	40 - 46
Flat Door (120 series, aluminium louvre, floor spring door) _ _ _ _ _	47 - 49
PT Doors _ _ _ _ _	50 - 54
Interior Doors (08 single glazing sliding door, 08 single glazing flat door, french door, central shaft door) _ _ _ _ _	55 - 59
Room Door (aluminum wood door, all aluminum door) _ _ _ _ _	60 - 63

ENGINEERING PRODUCT _ _ _ _ _	68 - 85
-------------------------------	---------

SKYLIGHTS _ _ _ _ _	86 - 97
---------------------	---------

INTERIOR DOORS

Italian Cloud Mirror Series _ _ _ _ _	102 - 116
Italian Light and Shadow Series _ _ _ _ _	117 - 130
Italian checkered series _ _ _ _ _	131 - 138
French Warm Oil Wind Series _ _ _ _ _	139 - 143
Italian agile series _ _ _ _ _	144 - 147
Italian Muli serie _ _ _ _ _	148 - 151
Italian Infinite Wind Series _ _ _ _ _	152 - 157

SYSTEM WINDOW SERIES






Special design style to create different home atmospheres and discover unexpected beauty.

Both function and beauty are emphasised, with a narrower border, a more minimalist appearance, and a delicate touch.

Multiple Opening Methods

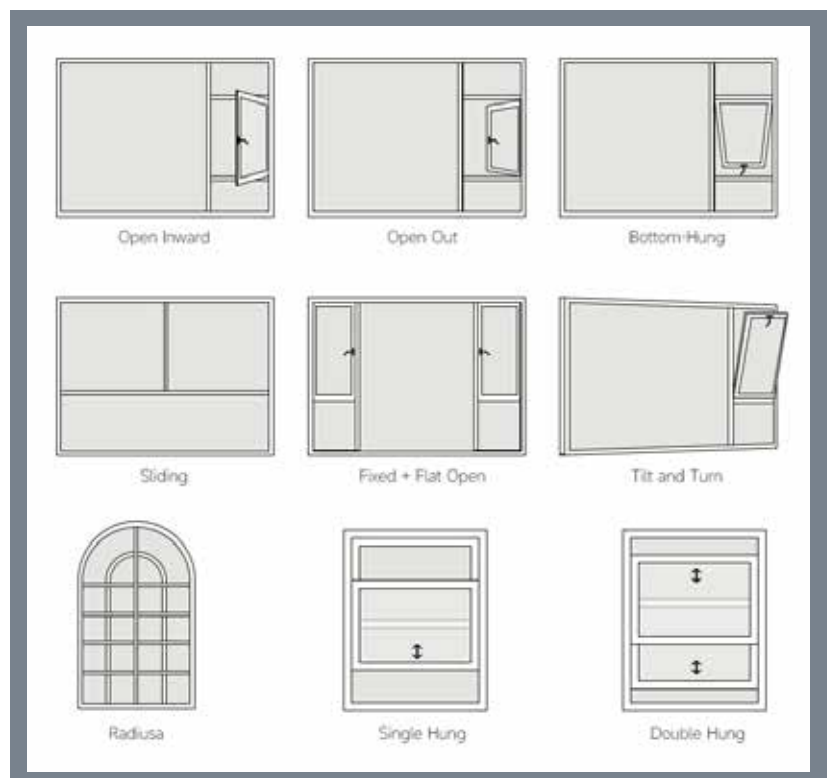



PRO110

CASEMENT WINDOW

PRODUCT PARAMETER

Profile Wall Thickness

2.0 mm

Frame Width

110 mm

Opening Options

Outward Swing/Inward Swing/ Inward Tilt & Swing / Swing Door

STANDARD CONFIGURATION

Profile Configuration

National Standard 6063-T5 Aluminum Alloy

Hardware System

CMECH Hardware

Glass Configuration

5+20A+5mm Tempered Insulated Glass

Screen Mesh

0.45 High-Definition Mesh

Thermal Barrier

PA66 Nylon Thermal Break

Shading System

Glass Blinds / Windproof Roller Blinds

Optional Glass Types

LOW-E/Coated / Smart/ Tinted Glass



BUILDING A REASONABLE
SENSE OF ORDER FOR
MINIMALISM WITH SIMPLE
YET EXTRAORDINARY
DETAILS, CREATING EVERY
BIT OF BEAUTY IN LIFE





E-120

CASEMENT WINDOW

PRODUCT PARAMETER

Profile Wall Thickness

20mm/50mm

Frame Width

120 mm

Opening Options

Outward Swing/Inward Swing/Inward Swing
with Tilt/Swing Door

STANDARD CONFIGURATION

Profile Configuration

National Standard 6063-T5 Aluminum Alloy

Hardware System

CMECH Hardware

Shading System

Glass Blinds / Windproof Roller Blinds

Screen Mesh

0.45 High-Definition Mesh

Optional Glass Types

LOW-E/Coated / Smart/ Tinted Glass

Glass Configuration

5+20A+5mm Tempered Insulated
Blacksmith

Thermal Barrier

PA66 Nylon Thermal Break



Designing with intention,
embracing simplicity, and
revealing beauty through
refined details.





S-90

CASEMENT WINDOW

PRODUCT PARAMETER

Profile Wall Thickness

1.8mm

Frame Width

90 mm

Opening Options

Inward Swing, Double Inward Swing, Inward swing with Tilt Turn

STANDARD CONFIGURATION

Profile Configuration

National Standard 6063-T5 Aluminum Alloy

Hardware System

CMECH Hardware

Shading System

Glass Blinds / Windproof Roller Blinds

Screen Mesh

0.45 High-Definition Screen / Folding Screen Mesh

Optional Glass Types

LOW-E / Coated / Smart / Tinted Glass


Glass Configuration

Triple Glazing: 5mm + 12A + 5mm + 12A + 5mm

Double Glazing: 5mm + 20A + 5mm

Thermal Barrier

PA66 Nylon Thermal Break

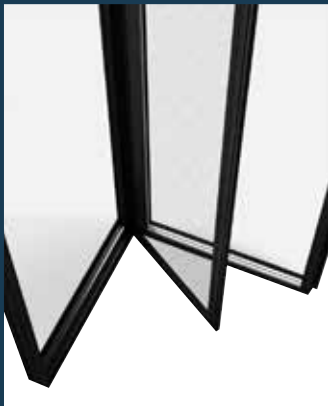

DOUBLE INWARD OPENING DESIGN SAFETY FIRST EASY TO CLEAN

Triple-Glass Dual-Chamber Configuration: Featuring a triple-glass setup (5+12A+5+12A+5) and a double-glass option (5+20A+5) delivering exceptional sound insulation and thermal efficiency.




Featured Imported Hardware
CMECH handle, over tens of thousands of safe openings and closures.
Won the German Red Dot Design Award.



Featured Imported Hardware
CMECH handle, over tens of thousands of safe openings and closures.
Won the German Red Dot Design Award.

S-90

CASEMENT WINDOW

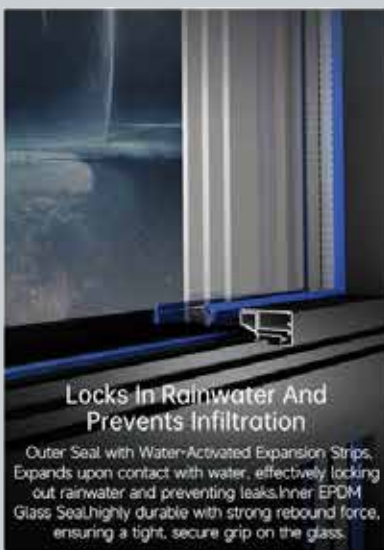

Locks In Rainwater And Prevents Infiltration

Outer Seal with Water-Activated Expansion Strips. Expands upon contact with water, effectively locking out rainwater and preventing leaks. Inner EPDM Glass Seal. Highly durable with strong rebound force, ensuring a tight, secure grip on the glass.



Multiple Sealing Strips

Three seal design, equipped with automotive grade EPDM EPDM compound foam rubber strip, the middle duck-bill glue fully play the role of rain curtain principle to make the product has good air tightness and water tightness.



112

SLIDING WINDOW

PRODUCT PARAMETER

Profile Wall Thickness

1.4 mm

Frame Width

112 mm

Opening Options

Push-And-Pull

STANDARD CONFIGURATION

Profile Configuration

National Standard 6063-T5 Aluminum Alloy

Optional Glass Types

LOW-E / Coated / Smart / Tinted Glass

Glass Configuration

5mm + 12A + 5mm Tempered Insulated Glass

Thermal Barrier

PA66 Nylon Thermal Break

Screen Mesh

0.45 High-Definition Screen / Folding Screen Mesh

Hardware System

EMD System

Shading System

Glass Blinds / Windproof Roller Blinds

112

SLIDING WINDOW

IN MODERN LIFE, WE ARE
CONSTANTLY SURROUNDED BY
NOISE AND DISTRACTIONS. ONLY A
FEW PEOPLE CAN TRULY SLOW
DOWN AND EXPERIENCE THE
IMAGINATION, CALM, AND
RELAXATION THAT MINIMALIST
LIVING BRINGS.





123

BROKEN BRIDGE
SUSPENSION
SLIDING WINDOW

PRODUCT PARAMETER

Profile Wall Thickness

2.0 mm

Frame Width

123 mm

Opening Options

Push-And-Pull

STANDARD CONFIGURATION

Profile Configuration

National Standard 6063-T5 Aluminum Alloy

Optional Glass Types

LOW-E / Coated / Smart / Tinted Glass

Glass Configuration

5mm + 15A + 5mm Tempered Insulated Glass

Thermal Barrier

PA66 Nylon Thermal Break

Screen Mesh

0.45 High-Definition Screen / Folding Screen Mesh

Hardware System

EMD System


Shading System

Glass Blinds / Windproof Roller Blinds



123

BROKEN BRIDGE SUSPENSION SLIDING WINDOW

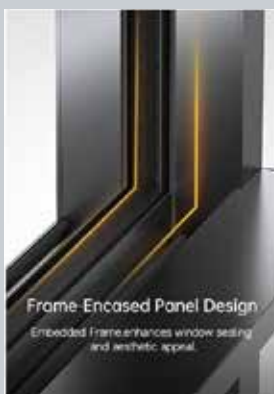



130

SIDE PRESS WINDOW



PRODUCT PARAMETER

Profile Wall Thickness

2.0 mm

Frame Width

130 mm

Opening Options

Push-And-Pull

STANDARD CONFIGURATION

Profile Configuration

National Standard 6063-T5 Aluminum Alloy

Optional Glass Types

LOW-E / Coated / Smart / Tinted Glass

Glass Configuration

5mm + 20A + 5mm Tempered Insulated Glass

Thermal Barrier

PA66 Nylon Thermal Break

Screen Mesh

0.45 High-Definition Screen / Folding Screen Mesh

Hardware System


EMD System

Shading System

Glass Blinds / Windproof Roller Blinds



MINIMAL IN FORM,
POWERFUL IN
PRESENCE—WHERE
THOUGHTFUL DETAILS
TRANSFORM SIMPLICITY
INTO TIMELESS BEAUTY.

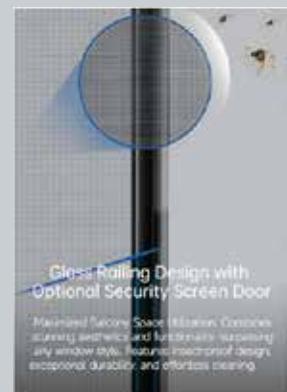



65

FOLDING WINDOW

PRODUCT PARAMETER

Profile Wall Thickness

2.0 mm

Frame Width

65 mm

Opening Options

Push-And-Pull

Single Fan Size Limit

Maximum width: 700 mm

Maximum height: 2500 mm

STANDARD CONFIGURATION

Profile Configuration

National Standard 6063-T5 Aluminum Alloy

Thermal Barrier

PA66 Nylon Thermal Break

Optional Glass Types

LOW-E / Coated / Smart / Tinted Glass

Screen Mesh


0.45 High-Definition Screen / Folding Screen Mesh

Glass Configuration

5mm + 20A + 5mm Tempered Insulated Glass

Hardware System

KERSSENBERG

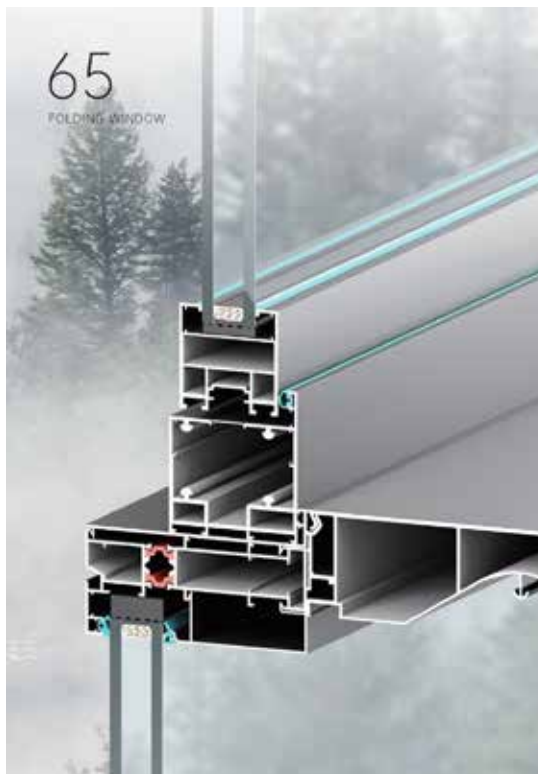


EVERY HEART HOLDS A WORLD OF EMOTIONS. THE EZZODOORS FOLDING WINDOW SERIES, INSPIRED BY COLLAGE ART, BRINGS LIGHT, SPACE, AND FEELING TOGETHER—TURNING YOUR HOME INTO A PLACE WHERE LIFE BEAUTIFULLY INTERSECTS.





40

FOLDING WINDOW

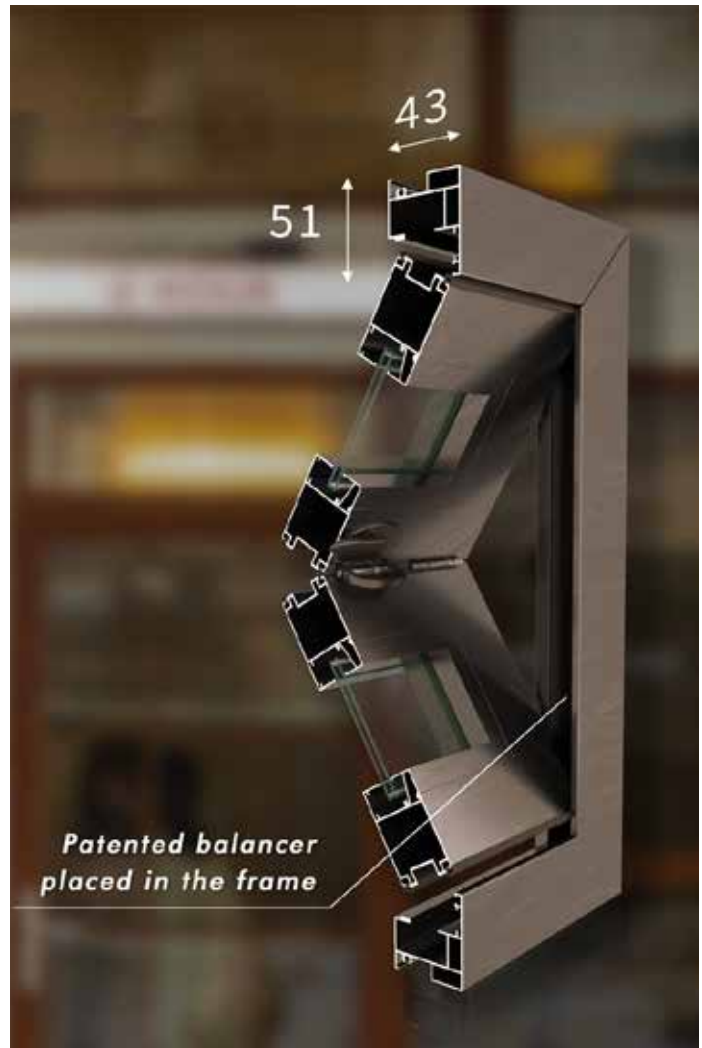

Reference size: 2.5m²

Aluminium thickness: 1.2-2.0mm


Can be made without bottom frame | Stop at any height

Cost-effective and most popular



55

FOLDING WINDOW

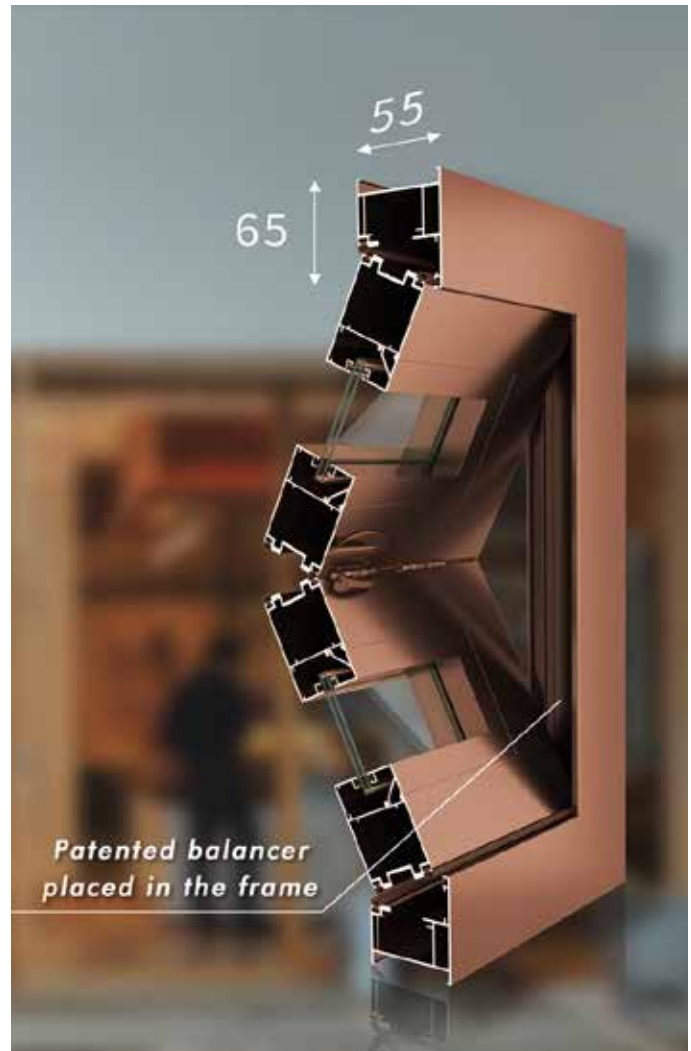

Reference size: 7m²

Aluminium thickness: 1.4-3.0mm


Can be made without bottom frame | Stop at any height

Various colours



60

FOLDING WINDOW

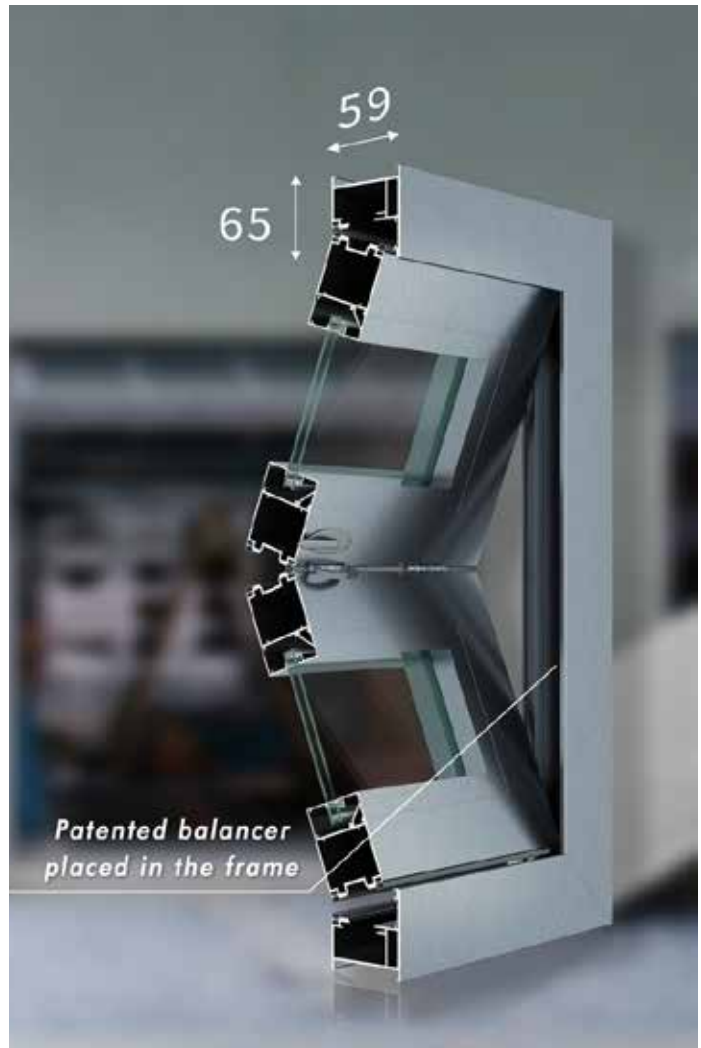

Reference size: 10m²

Aluminium thickness: 2.0-3.0mm

Can be made without bottom frame | Stop at any height

Largest size in the folding series



50


SINGLE-HUNG WINDOW

Reference size: 1.8m²

Aluminium thickness: 1.2-1.4mm

Can be made without bottom frame | Stop at any height


Movable sash on the bottom or top /
One sash with a tilting feature

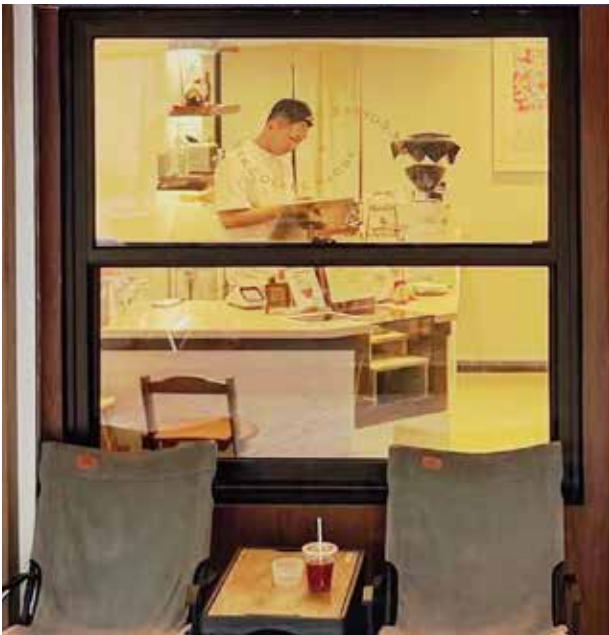

70

SINGLE-HUNG WINDOW

Patented balancer
placed in the frame

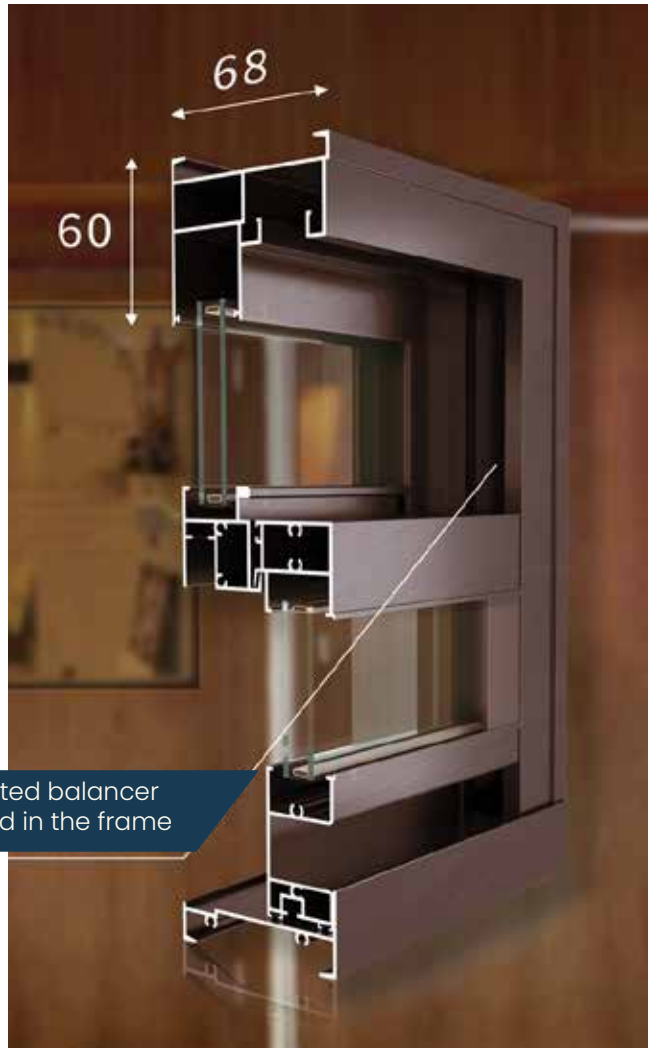


Reference size: 7m²

Aluminium thickness: 1.4-1.6mm

Can be made without bottom frame | Stop at any height

Movable sash on the bottom or top /
One sash with a tilting feature

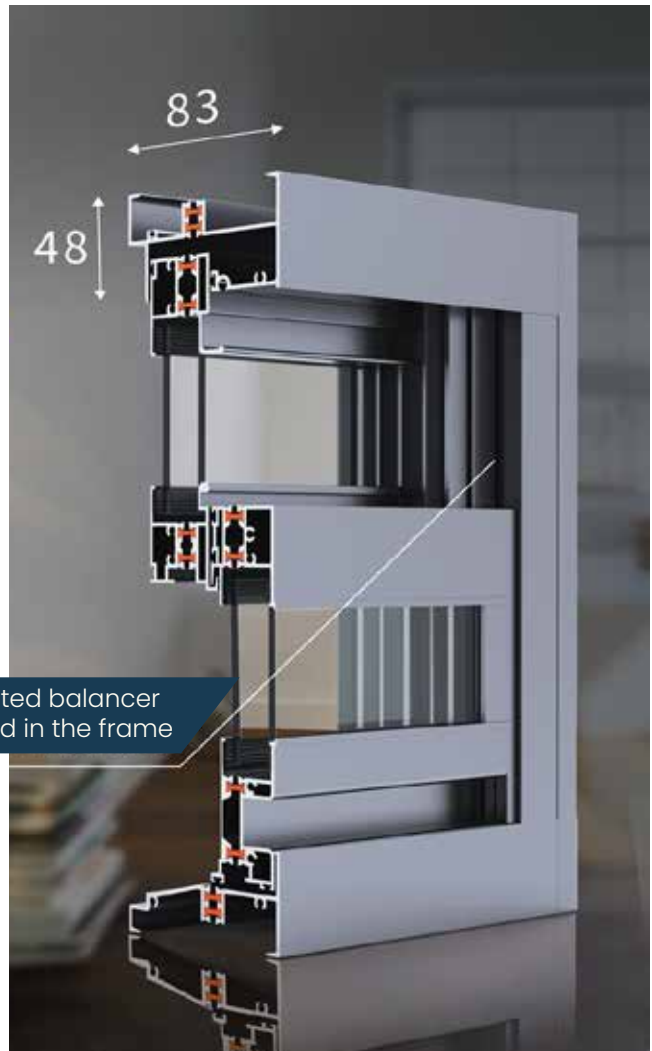

83

THERMAL BREAK SYSTEM
DOUBLE-HUNG WINDOW

Reference size: 2.5m²

Aluminium thickness: 1.5mm

Can be made without bottom frame | Stop at any height

Two movable sashes /
Upper and lower sash with a tilting feature



125

MINIMALIST INTELLIGENT
SINGLE-HUNG WINDOW



Window and mesh integrated | Width not more than 3m

Three types of protection | Child lock | Extremely quiet running

Upgraded to an extremely narrow design



158

MINIMALIST INTELLIGENT SINGLE-HUNG WINDOW



Window and mesh integrated | Width not more than 4.2m

Three types of protection | Child lock | Extremely quiet running

An upgrad of the 168 series |
Extremely narrow handrail surface


SYSTEM DOOR SERIES





127

SLIDING DOOR

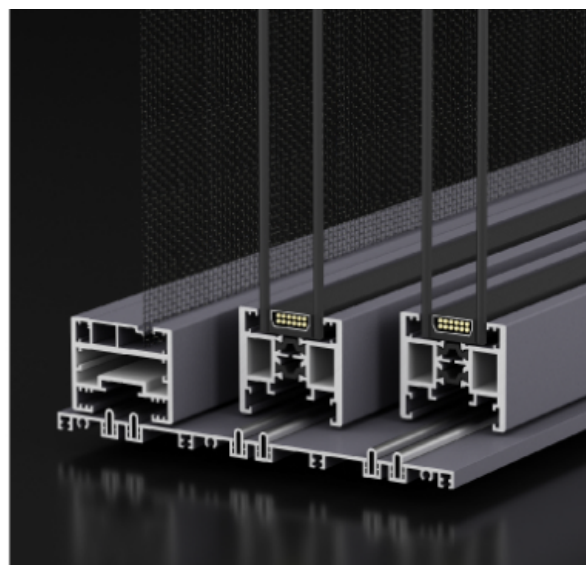

190

SLIDING DOOR

PRODUCT PARAMETER

Profile Wall Thickness

4.0 mm

Frame Width

127/190 mm

Opening Options

Push-And-Pull

STANDARD CONFIGURATION

Profile Configuration

National Standard 6063-T5 Aluminum Alloy

Optional Glass Types

LOW-E / Coated / Smart / Tinted Glass

Glass Configuration

5mm + 20A + 5mm Tempered Insulated Glass

Thermal Barrier

PA66 Nylon Thermal Break

Screen Mesh

0.45 High-Definition Screen / Folding Screen Mesh

Hardware System

EMD System

Shading System

Glass Blinds / Windproof Roller Blinds

Lower Track Configuration

High Track With Water Barrier / Low Track



WHERE INNOVATION MEETS
ELEGANCE—EZZODOORS
REDEFINES SPATIAL
PARTITIONS WITH SEAMLESS
TRANSITIONS, LIGHTWEIGHT
DESIGN, AND REFINED
AESTHETICS.

127/190
SLIDING DOOR





TY120

SLIDING DOOR

PRODUCT PARAMETER

Profile Wall Thickness

Frame: 2.0 mm | Door Panel: 2.0 -4.0 mm |
Hook Rail: 3.0 mm - 6.00 mm

Frame Width

120 mm

Opening Options

Push-And-Pull

Maximum Height

Height within 4m

STANDARD CONFIGURATION

Profile Configuration

National Standard 6063-T5 Aluminum Alloy

Screen Mesh

Diamond Mesh / Folding Gauze

Optional Glass Types

LOW-E / Coated / Smart / Tinted Glass

Hardware System

EMD System

Glass Configuration

5mm + 20A + 5mm Tempered Insulated Glass

Shading System

Glass Blinds / Windproof Roller Blinds

Thermal Barrier

PA66 Nylon Thermal Break

Lower Track Configuratiuon

High Track With Water Barrier / Low Track




TY120

SLIDING DOOR

Industry first

The lower rail adopts a high and low slope
Designed for smoother drainage

MINIMAL IN FORM,
POWERFUL IN
PRESENCE—WHERE
THOUGHTFUL DETAILS
TRANSFORM SIMPLICITY
INTO TIMELESS BEAUTY.

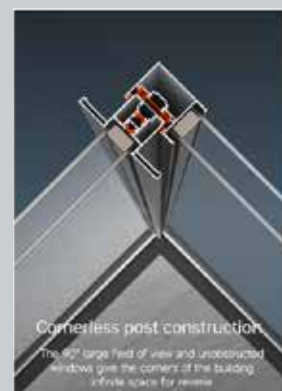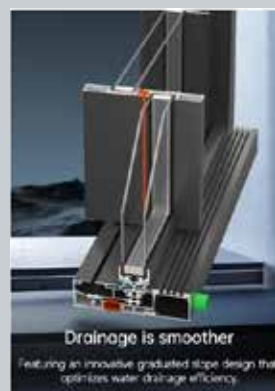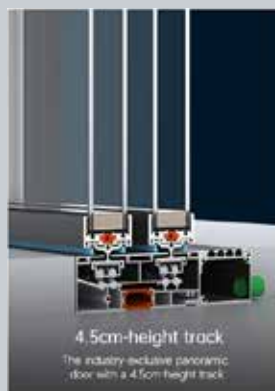



A DISTINCTIVE DESIGN LANGUAGE
THAT SHAPES UNIQUE HOME
ATMOSPHERES WHILE REVEALING
UNEXPECTED BEAUTY. WITH A
PERFECT BALANCE OF FUNCTION
AND AESTHETICS, THE DESIGN
FEATURES SLIMMER FRAMES AND A
REFINED MINIMALIST TOUCH.

TY120

SLIDING DOOR





TY150

SLIDING DOOR

PRODUCT PARAMETER

Profile Wall Thickness

5.0mm

Frame Width

150 mm

Opening Options

Push-And-Pull

Maximum Height

Height within 7m

STANDARD CONFIGURATION

Profile Configuration

National Standard 6063-T5 Aluminum Alloy

Screen Mesh

Diamond Mesh / Folding Gauze

Optional Glass Types

LOW-E / Coated / Smart / Tinted Glass

Hardware System

EMD System

Glass Configuration

5mm + 27A + 5mm Tempered Insulated Glass

Shading System

Glass Blinds / Windproof Shutter

Thermal Barrier

PA66 Nylon Thermal Break



Lower Track Configuratiuon

High Track With Water Barrier / Low Track

TY150

SLIDING DOOR

- Barrier-free passage, safer
- Linear embedded track design
- Watertight, airtight performance is outstanding
- Better sound insulation
- Track optional marble, tile, rock board, Wooden floor, with the ground integrated, It further exudes the grandeur of a luxury mansion.

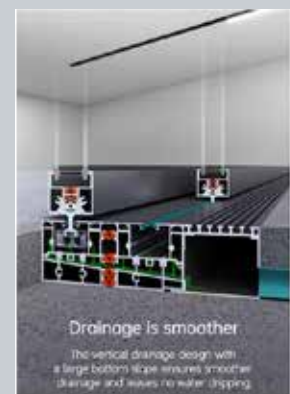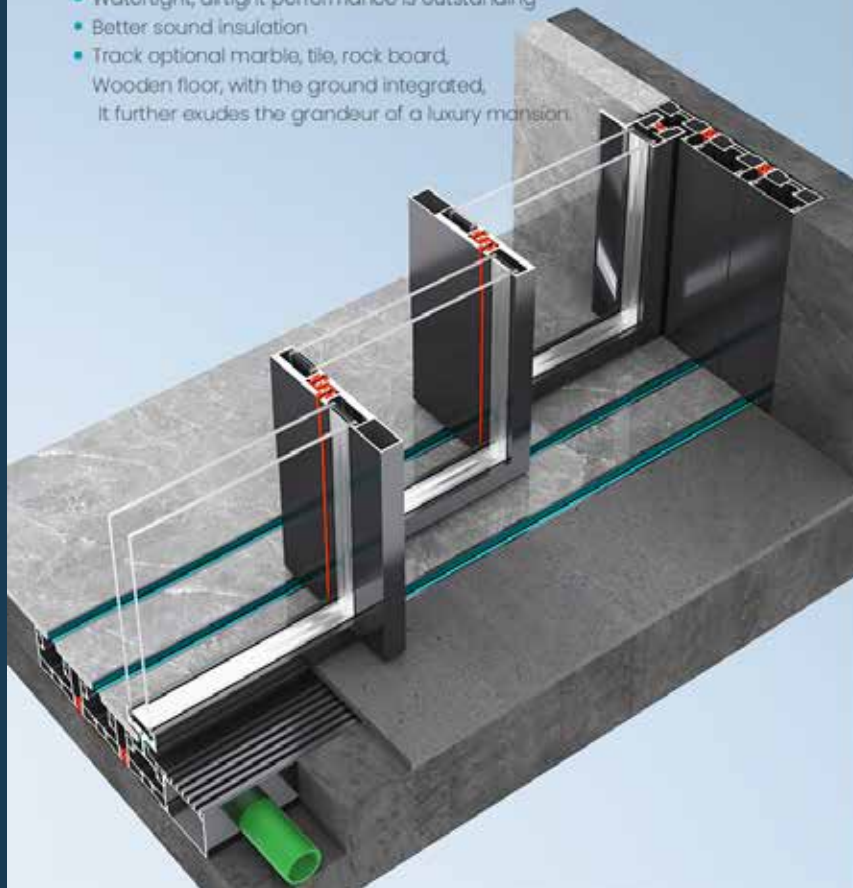



A DISTINCTIVE DESIGN THAT
CREATES UNIQUE HOME
ATMOSPHERES AND REVEALS
UNEXPECTED BEAUTY—COMBINING
FUNCTIONALITY WITH ELEGANCE
THROUGH SLIMMER FRAMES AND
REFINED MINIMALIST DETAILS.


TY150

SLIDING DOOR



ARC DOORS



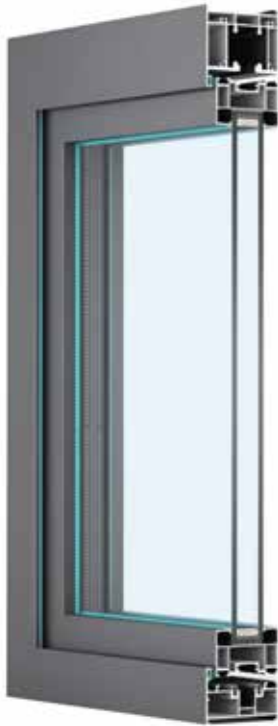

65

HEAVY TYPE FOLDING DOOR

PRODUCT PARAMETER

Profile Wall Thickness

2.0 mm

Frame Width

65 mm

Opening Options

Push-And-Pull

STANDARD CONFIGURATION

Profile Configuration

National Standard 6063-T5 Aluminum Alloy

Thermal Barrier

PA66 Nylon Thermal Break

Optional Glass Types

LOW-E / Coated / Smart / Tinted Glass

Hardware System

KERSSENBERG

Glass Configuration

5mm + 20A + 5mm Tempered Insulated Glass

HARDWARE CONFIGURATION



Swing Lock (optional)



Sword-Type Lock



Lock Cylinder (optional)



Optional Lock Body (optional)



Automatic Bolt



Handle Hinge



Single Hinge




Top Guide Wheel



Bottom Wheel



Hanger Wheel

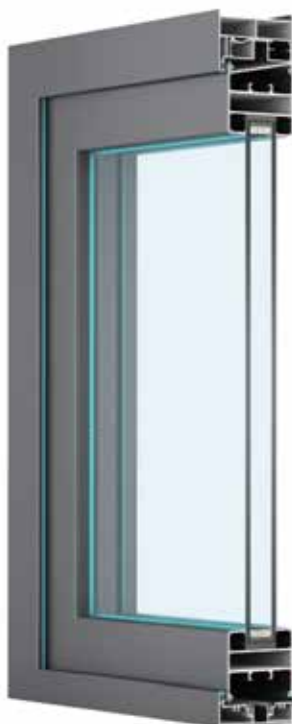

68KSBG

NON-THERMAL BREK,
ANTI-PINCH HEAVY
DUTY FOLDING DOOR

PRODUCT PARAMETER

Profile Wall Thickness

2.0 mm

Frame Width

68 mm

Opening Options

Push-And-Pull

Single Fan Size Limit

Maximum Width 850 mm

Maximum Height 3600 mm

STANDARD CONFIGURATION

Profile Configuration

National Standard 6063-T5 Aluminum Alloy

Thermal Barrier

PA66 Nylon Thermal Break

Optional Glass Types

LOW-E / Coated / Smart / Tinted Glass

Hardware System

KERSSENBERG

Glass Configuration

5mm + 20A + 5mm Tempered Insulated Glass

HARDWARE CONFIGURATION



Single Side Handle Lock



Handle



Lock Body



Auto Top & Bottom Bolts



3+1 Bottom Wheels
Top Wheel



Hinge



Double-Side Handle Lock
(optional)



Double-Side Handle Lock
(optional)



Lock Body with Core
(optional)



Double Hanger Wheels
(optional)



Hanger Wheels
(optional)



2+0, 3+1 Steel Wheels
(optional)





68KSBG

NON-THERMAL BREK,
ANTI-PINCH HEAVY DUTY FOLDING DOOR

PINCH-FREE DESIGN, SPACIOUS INTERIOR

Meticulous details showcase quality and care.
Superior stain resistance ensures effortless
maintenance.

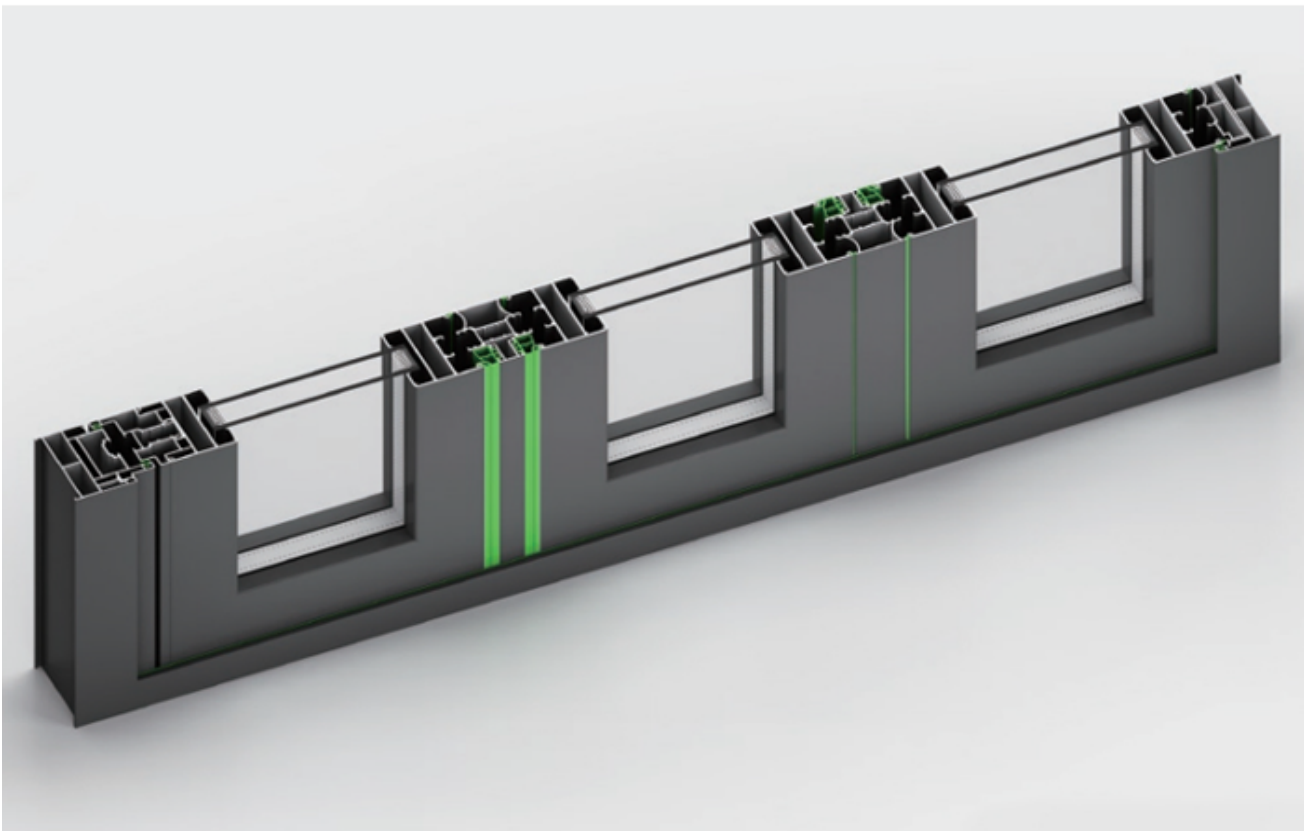

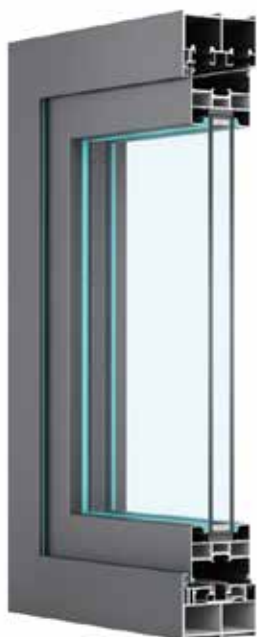

80KSBG

NON-THERMAL BREK,
ANTI-PINCH HEAVY
DUTY FOLDING DOOR



PRODUCT PARAMETER

Profile Wall Thickness

2.0 mm

Frame Width

80 mm

Opening Options

Push-And-Pull

Single Fan Size Limit

Maximum Width 900 mm

Maximum Height 4800 mm

STANDARD CONFIGURATION

Profile Configuration

National Standard 6063-T5 Aluminum Alloy

Thermal Barrier

PA66 Nylon Thermal Break

Optional Glass Types

LOW-E / Coated / Smart / Tinted Glass

Hardware System

KERSSENBERG

Glass Configuration

5mm + 27A + 5mm Tempered Insulated Glass

Screen Mesh

0.45 High-Definition Screen / Folding
Screen Mesh

HARDWARE CONFIGURATION



Single Side Handle Lock



Handle



Lock Body



3+1 Bottom Wheels
Top Wheel



Hinge



2+0 Hanger Wheel
System



Double-Side Handle Lock
(optional)



Double-Side Handle Lock
(optional)



Lock Body with Core
(optional)




Double Hanger Wheels
(optional)



Hanger Wheels
(optional)




2+0, 3+1 Steel Wheels
(optional)

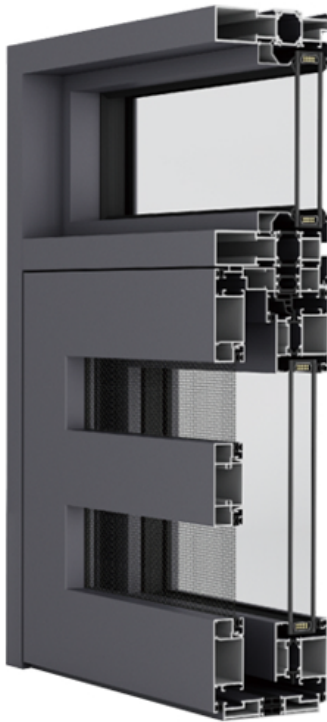

120 OUTDOOR FLAT DOOR

NOT LIMITED TO LIMITED SPACE, WHEN A
SENSE OF STRUCTURE INTERVENES LIGHT
AND SHADOW ADD DEPTH TO THE
SPACE

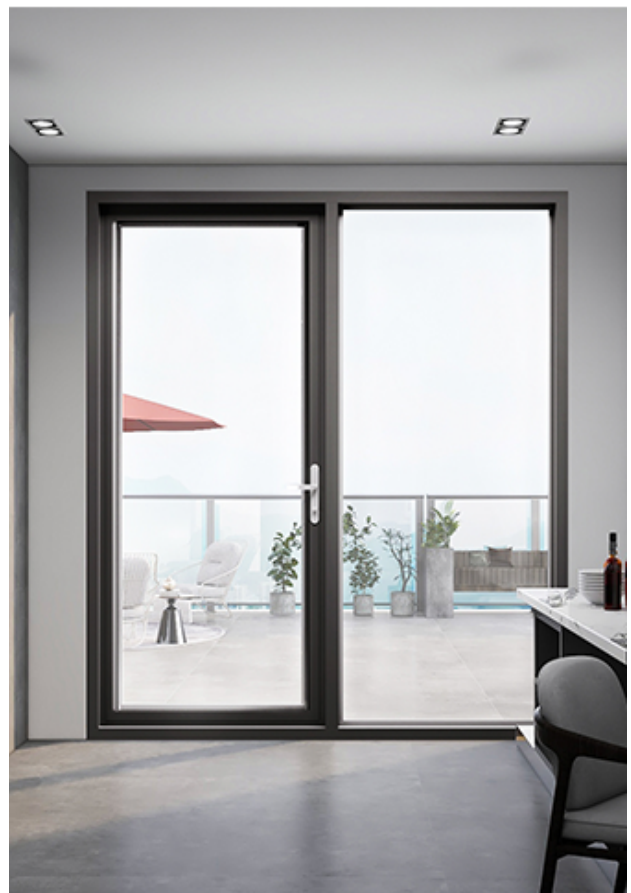



120

Aluminium Sutter doors





OUTDOOR SPRING DOOR

THE INTERWEAVING OF NATURAL AND MODERN
BEAUTY CREATES A PROFOUND CHARM WITHIN
THE SPACE. THE DELICATE SURFACE TEXTURE
ENHANCES THE ESSENCE OF NATURE,
ALLOWING ITS BEAUTY TO BE FULLY EXPRESSED
WHILE ADDING A UNIQUE TOUCH OF
CHARACTER AND ELEGANCE TO THE
ENVIRONMENT.



PT DOOR


SWING OR SLIDE IT ADAPTS TO YOUR NEEDS!
EXPERIENCE VERSATILITY WITH DUAL OPENING
OPTIONS, SWING OR SLIDE, DESIGNED TO
TRANSFORM YOUR USAGE EXPERIENCE.



PT DOOR



DOUBLE-TRACK



TRIPLE TRACK



TRIPLE SYNCHRONIZATION



TRIPLE SYNCHRONIZATION



HINGE





65*33 PT DOOR

DUAL-TRACK AND TRIPLE-TRACK
DIAMOND MESH SCREEN

PRODUCT PARAMETER

Profile Wall Thickness

1.6 mm

HookProfile Width

65 mm





33*23 PT DOOR

DUAL-TRACK AND TRIPLE-TRACK

PRODUCT PARAMETER

Profile Wall Thickness

2.0 mm

HookProfile Width

23 mm





16 PT DOOR

SINGLE GLASS PT DOOR

PRODUCT PARAMETER

Profile Wall Thickness

1.2 mm

Hook Profile Width

16 mm





INTERIOR SLIDING DOOR

PREMIUM HANGING SLIDING DOOR,
TWO TRACKS, TWO PANELS/TWO
TRACKS, FOUR PANELS, THREE TRACKS,
TRIPLE SYNCHRONIZATION

PRODUCT PARAMETER

Profile Wall Thickness

3.0 mm

Frame Width

100/152 mm

Opening Options

Two-Rail Two-Panel Sliding / Two-Rail Four-Panel Sliding / Three-Rail Triple-Linked Sliding

STANDARD CONFIGURATION

Profile Configuration

National Standard 6063-T5 Ultra High Precision
Aluminum Alloy

Thermal Barrier

PA66 Nylon Thermal Break

Optional Glass Types

LOW-E / Coated / Smart / Tinted Glass

Hardware System

EMD Hardware

Glass Configuration

8mm Tempered Insulated Glass



INTERIOR SLIDING DOOR


Design is experienced as a whole,
yet its true beauty lies within the
details. Every element is carefully
crafted to reveal the inherent
quality and refined character of
the space.





INDOOR – FLAT DOORS


FREE MATCHING,
FANTASY COMBINATION

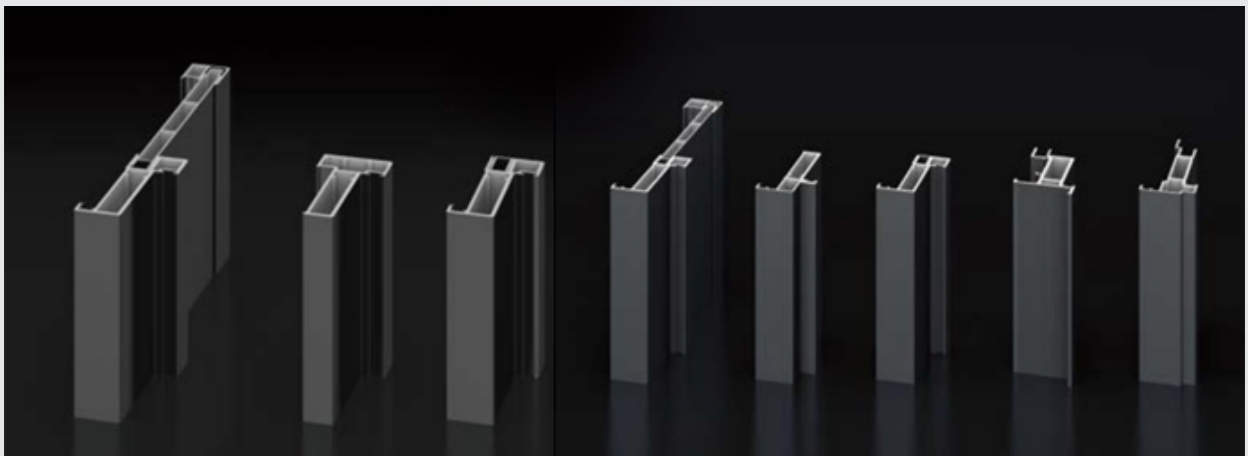



INTERIOR PIVOT DOORS


A distinctive design language that shapes unique home atmospheres while revealing unexpected beauty. With a perfect balance of functionality and aesthetics, it features slimmer frames and a refined minimalist touch.

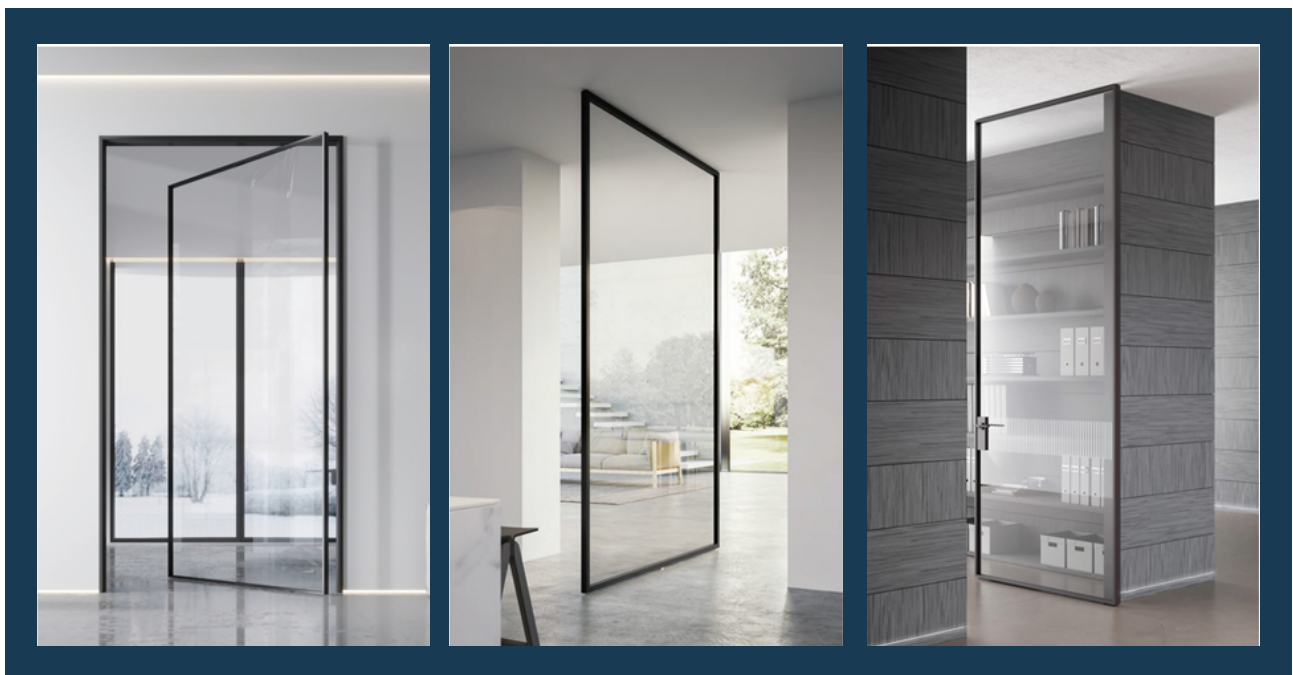




INTERIOR FRENCH DOORS

A distinctive design language that shapes unique home atmospheres while revealing unexpected beauty. Perfectly balancing functionality and aesthetics, it features slimmer frames and refined minimalist details.

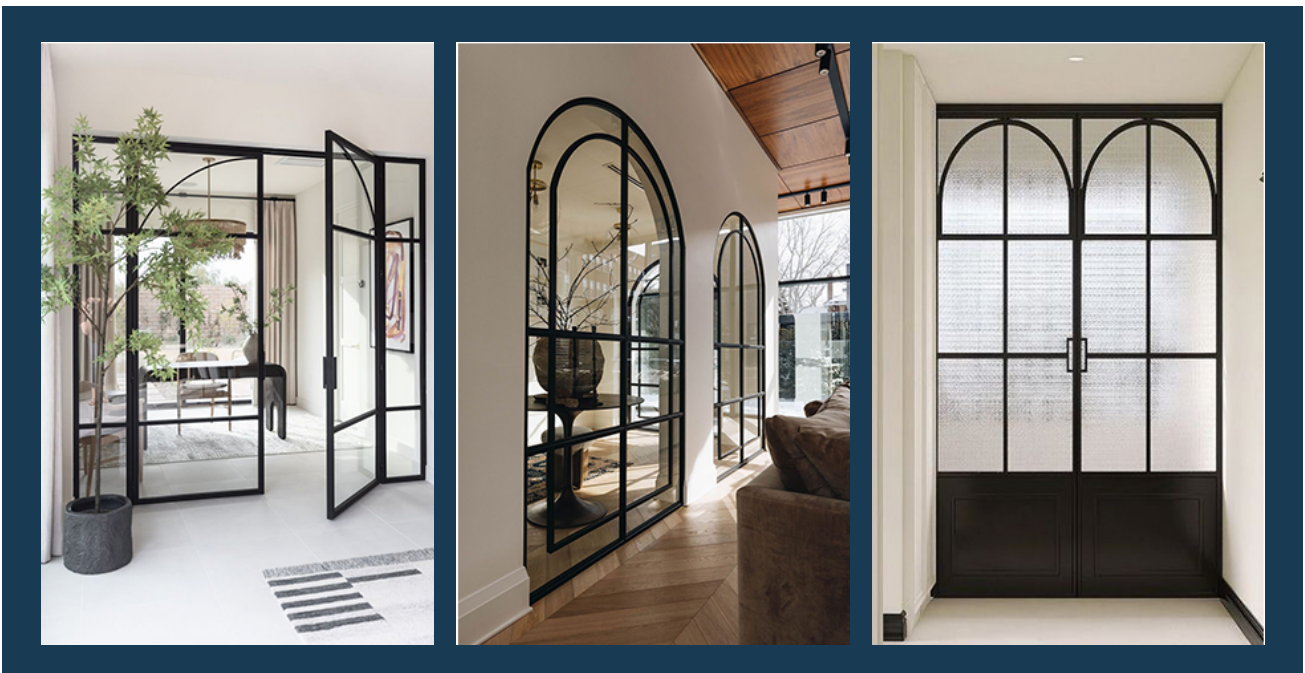

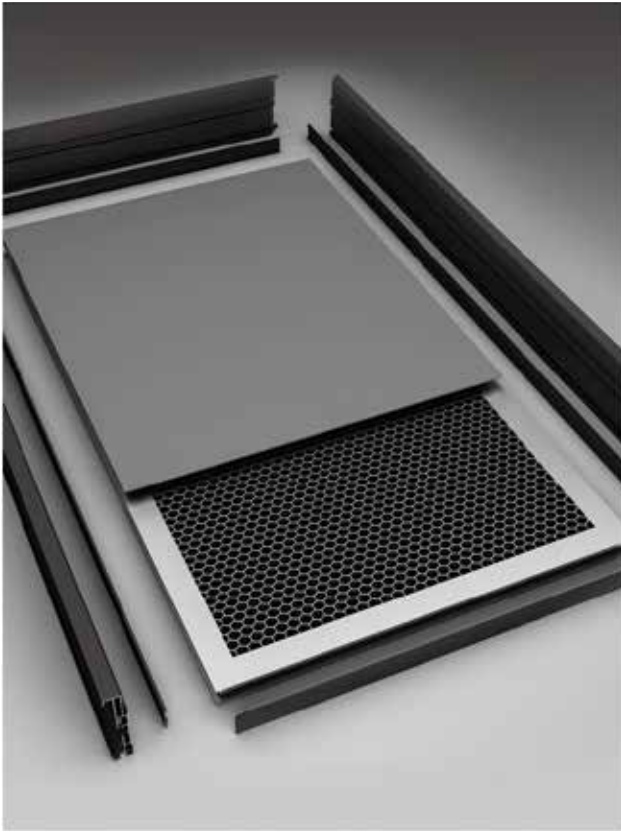

ALUMINIUM WOOD DOOR

DOORWALL CABINET FULL CASE

LANDING SERVICE PROVIDER



Fireproof



Insect Prevention



Eco-Friendly



Fashionable



Wearproof



YD-M-001



YD-M-002



YD-M-003



YD-M-004



YD-M-005



YD-M-006



YD-M-013



YD-M-014



YD-M-015



YD-M-007



YD-M-008



YD-M-009



YD-M-010



YD-M-005



YD-M-011



YD-M-016



YD-M-017



YD-M-018



ACCESSORIES



DOOR LOCK



ATTACHMENTS



CMECH



HOPPE



HARDWARE ACCESSORIES

G-U



SIEGENIA




KIN LONG



PANASONIC




GLASS OPTION




TEMPERED GLASS

The impact strength is 3 to 5 times that of ordinary glass, and when the glass is destroyed, the fragments will become honeycomb-like small obtuse particles, which are not easy to hurt people.



LOW-E GLASS

Anti-ultraviolet, with heat insulation, and a heat preservation effect. According to the light transmittance, it is divided into Low, medium and high transmittance low-E.

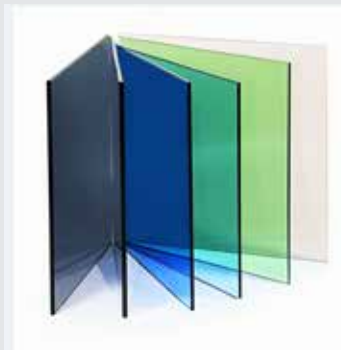

LAMINATED GLASS


It consists of two or more pieces of glass sandwiched with one or more layers of organic polymer intermediate film. Laminated glass has good safety; even if broken will not be scattered, and can effectively prevent personnel injury. At the same time, it also has certain sound insulation and heat insulation properties



TINTED GLASS


Colored glass is coated with metal oxides or organic matter, which can change the colour and light transmission of the glass. It can not only block UV rays, reduce the fading of indoor furniture and decorations, but also improve indoor privacy.

GLASS OPTION

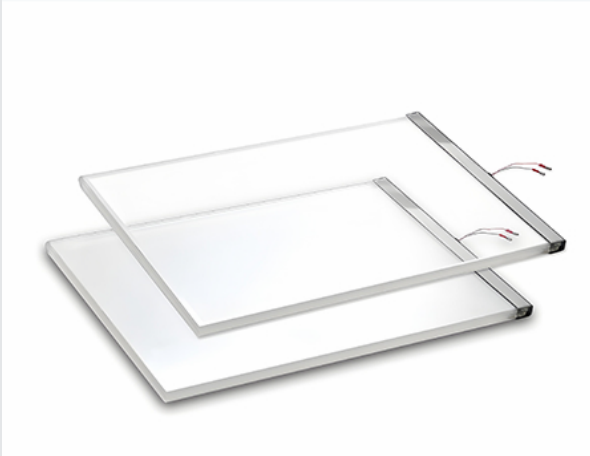

DIMMING GLASS

Dimming glass can be controlled by electric control, temperature control, light control, pressure control and other ways to achieve the transparent and opaque state of the glass switch.

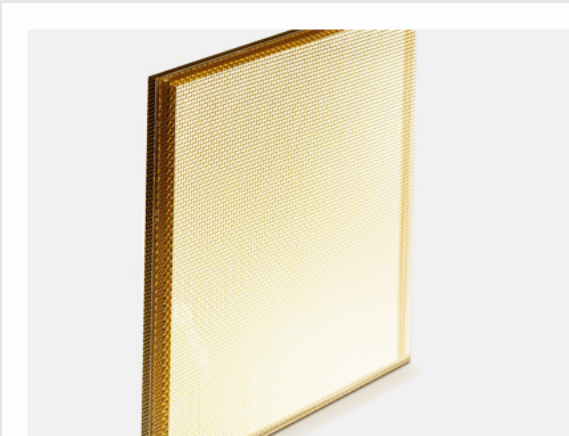

AMBERINA

Art glass has a unique appearance and fine texture, which can significantly enhance the beauty of interior decoration and improve the privacy of the interior.



BULLETPROOF GLASS

Bulletproof glass not only has the light transmission and image transmission performance of glass, but also has the protection ability of bulletproof glass. The bulletproof principle of bulletproof glass is that it can convert the kinetic impact energy of the bullet into the elastic potential energy of the glass and the surface energy of the fragment.


STANDARD COLOUR CHIPS



METALLIC GREY




RUBY RED

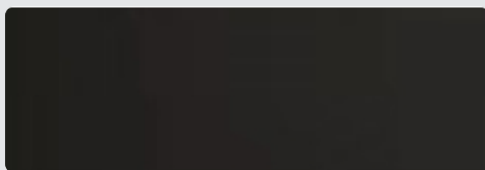

DEEP SKIN




MELANITE

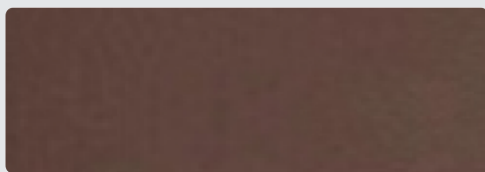

METALLIC COFFEE



MOSS GREY

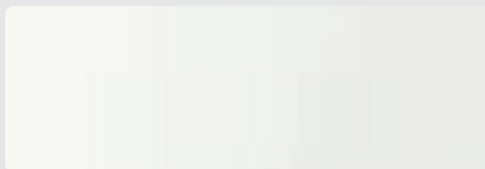

FAIR SKIN



METALLIC GREY



CHOCOLATE BROWN



LVORY



SIGNAL BROWN



PASTEL BLUE

SCREEN


Screen Styles: Fixed Fly Screen, Sliding Fly Screen, Rolling Fly Screen, Retractable Fly Screen

Metarials Options: Fibreglass / 302 Stainless Steel / Aluminium



ENGINEERING PRODUCT

(HOTEL, HOSPITALS, BUSINESS OFFICE AREAS)

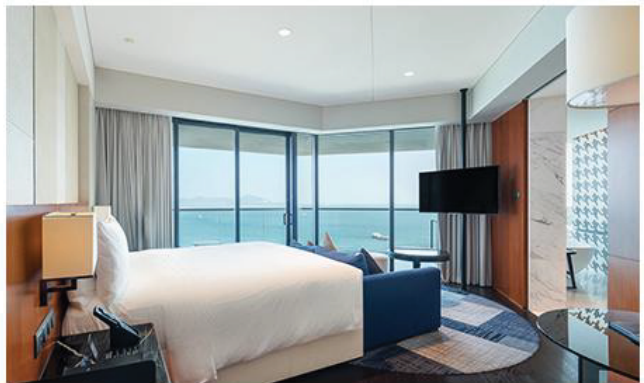



50 CASEMENT WINDOW

PRODUCT PARAMETER

Profile Wall Thickness

1.4 mm

Glass Configuration

Double Glazing: 5mm+12A+5mm

Single Glazing: 5mm


Color Chips

Sand Grey

Sand Black

White

Coffee

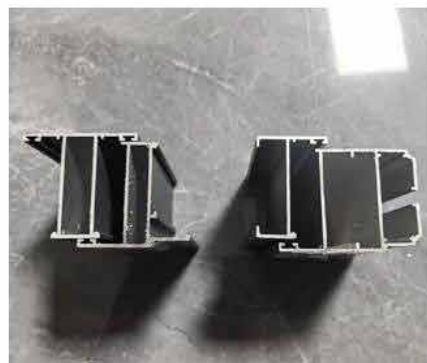



50 SWING DOOR

PRODUCT PARAMETER

Profile Wall Thickness

1.4 mm

Glass Configuration

Double Glazing: 5mm+12A+5mm

Single Glazing: 5mm



Color Chips

Sand Grey

Sand Black

White

Coffee

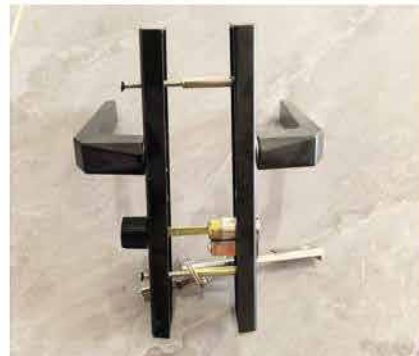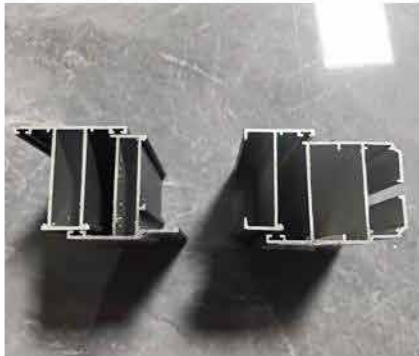



70 CASEMENT WINDOW

PRODUCT PARAMETER

Profile Wall Thickness

1.4 mm

Glass Configuration

Double Glazing: 5mm+12A+5mm

Single Glazing: 5mm



Color Chips

Sand Grey

Sand Black

White

Coffee

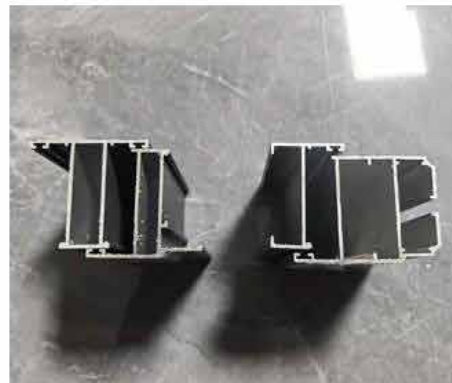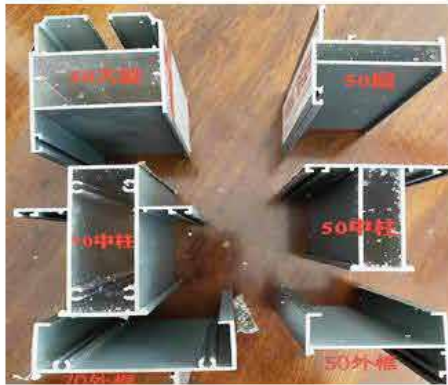



70 SWING DOOR

PRODUCT PARAMETER

Profile Wall Thickness

1.4 mm

Glass Configuration

Double Glazing: 5mm+12A+5mm

Single Glazing: 5mm


Color Chips

Sand Grey

Sand Black

White

Coffee

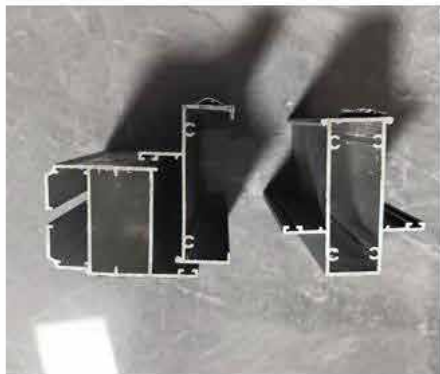



70 SWING ALUMINIUM LOUVERED DOOR

PRODUCT PARAMETER

Profile Wall Thickness

1.4 mm

Glass Configuration

Double Glazing: 5mm+12A+5mm

Single Glazing: 5mm



Color Chips

Sand Grey

Sand Black

White

Coffee

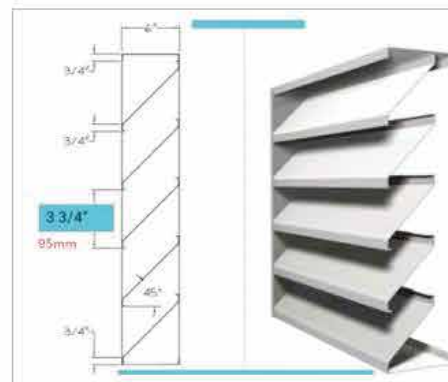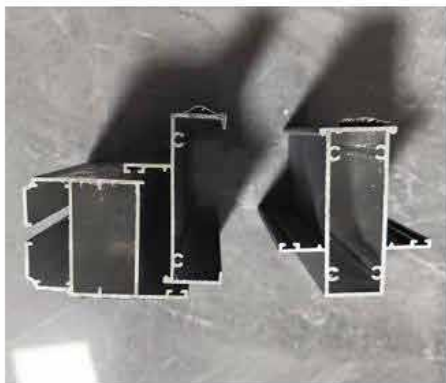



G68 SLIDING WINDOW/DOOR

PRODUCT PARAMETER

Profile Wall Thickness

1.4 mm

Glass Configuration

Double Glazing: 5mm+12A+5mm

Single Glazing: 5mm

Color Chips

Sand Grey

Sand Black


White

Coffee



ENGINEERING PRODUCT PRO

(HOTEL, HOSPITALS, BUSINESS OFFICE AREAS)

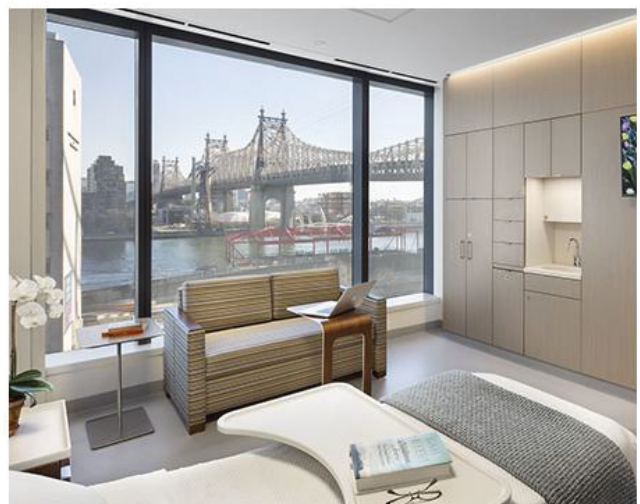



J50 CASEMENT WINDOW/FIXED WINDOW

PRODUCT PARAMETER

Profile Wall Thickness

1.4 mm


Glass Configuration

Double Glazing: 5mm+12A+5mm

Single Glazing: 6mm

Color Chips

Sand Grey

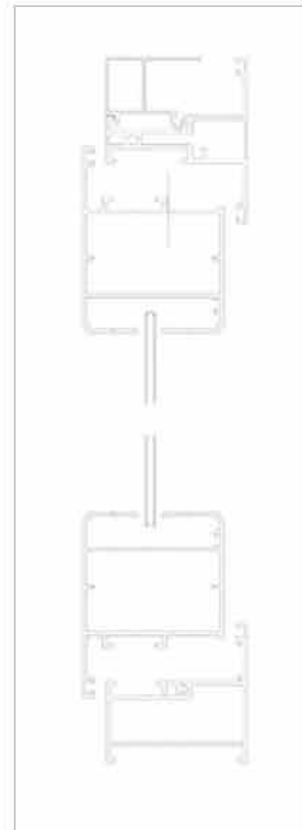



J70 SWING DOOR

PRODUCT PARAMETER

Profile Wall Thickness

1.6 mm

Glass Configuration

Double Glazing: 5mm+20A+5mm

Single Glazing: 6mm

Color Chips

Sand Grey

Sand Black

White





50 CASEMENT WINDOW

PRODUCT PARAMETER

Profile Wall Thickness

1.4 mm

Glass Configuration

Double Glazing: 5mm+18A+5mm

Single Glazing: 5mm

Color Chips

Sand Grey

Sand Black

White

Coffee



ADVANTAGES

The position features a transition frame, the fixed glass requires no outdoor sealant, and the direct drainage system ensures simple installation



55/60 THERMEL BREAK ALUMINIUM CASEMENT WINDOW

PRODUCT PARAMETER

Profile Wall Thickness

2 mm

Glass Configuration

Double Glazing: 5mm+12A+5mm

Color Chips

Sand Grey

White



Exterior fixed glass installation without sealant application, Direct drainage system



77-68 TWO-TRACK SLIDING WINDOW

PRODUCT PARAMETER

Profile Wall Thickness

1.4 mm

Glass Configuration

Double Glazing: 5mm+9A+5mm

Color Chips

Sand Grey

Sand Black

White





111-68 THREE-TRACK SLIDING WINDOW WITH SCREEN

PRODUCT PARAMETER

Profile Wall Thickness

1.4mm

Glass Configuration

Double Glazing: 5mm+12A+5mm

Single Glazing: 5 mm

Color Chips

Sand Grey

Sand Black

White





50 SINGLE AND DOUBLE HUNG WINDOWS

PRODUCT PARAMETER

Profile Wall Thickness

1.4mm

Glass Configuration

Double Glazing: 5mm+9A+5mm

Single Glazing: 5 mm

Color Chips


Sand Grey

Sand Black

White

Coffee

Champagne

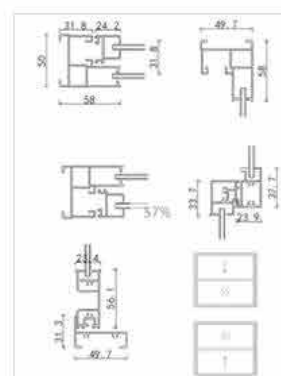



FOLDING WINDOW

PRODUCT PARAMETER

Profile Wall Thickness

1.6mm

Glass Configuration

Double Glazing: 5mm+20A+5mm

Single Glazing: 6mm



Color Chips

Sand Grey

Sand Black

White

Coffee

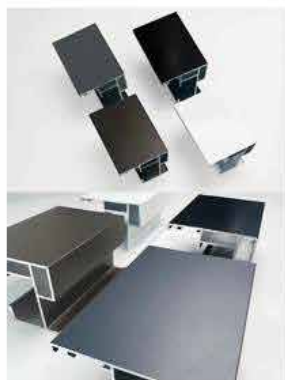



ULTRA-NARROW GHOST DOOR

PRODUCT PARAMETER

Profile Wall Thickness

2mm

Glass Configuration

Single Glazing: 8 mm





4516 FLOOR SPRING GLASS DOOR

PRODUCT PARAMETER

Profile Wall Thickness

Frame 2.0, Glazing Stile 2.0

Glass Configuration

Double Glazing: 4mm+15A+4mm

Single Glazing: 8mm






SKYLIGHT




SR -R30

NARROW SIDE SUNROOF



Single fan design limitation



Material:
6063-T5 Aluminium profile

Applicable space: Roof, lighting well, basement and sunshine room

Open Method: Electric upper suspension outward opening

Process craft: Robot seamless welding

Surface treatment: Whole window electrostatic powder spraying

Glass configuration (Selective):
laminated glass

5mm+27Ar+5mm

5mm+0.76pvb+5mm

5mm+22Ar+5mm+0.76pvb+5mm

Standard configuration:

Chain Motor

Patented control system

Mute waterproof switch

LED Light

Automobile-grade sealant strip




Selective Color: Colors customizable (Cost different)

SR -R90


ELECTRIC TOP-HUNG
SKYLIGHT



Note: This product quote does not include glass



Single fan design limitation



Material:
6063-T5 Aluminium profile

Applicable space: Roof, lighting well, basement and sunshine room

Open Method: Electric upper suspension outward opening

Process craft: Robot seamless welding

Surface treatment: Whole window electrostatic powder spraying

Glass configuration (Selective):

laminated glass

5mm+27Ar+5mm

5mm+0.76pvb+5mm

5mm+22Ar+5mm+0.76pvb+5mm

Standard configuration:

Pushrod Motor

Patented control system

Mute waterproof switch

LED Light


Automobile-grade sealant strip




Selective Color: Colors customizable (Cost different)

SR - S110


MEDIUM SIZED SLIDING
SKYLIGHT

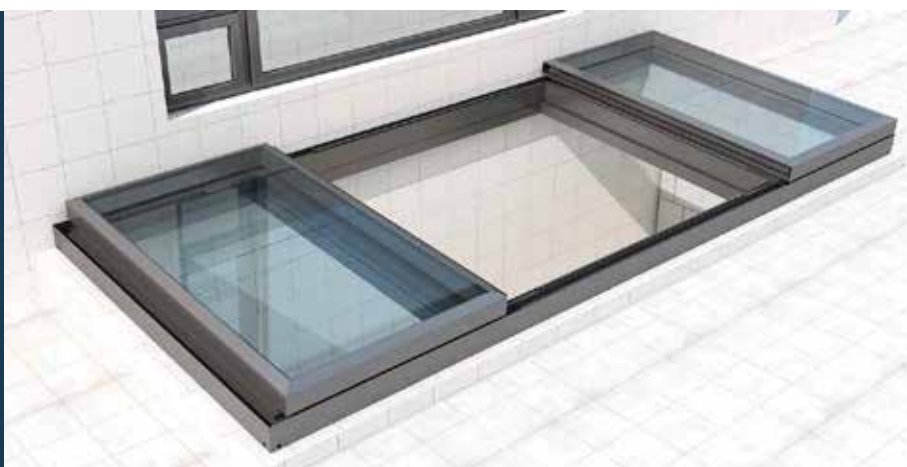

Note: This product quote does not include glass

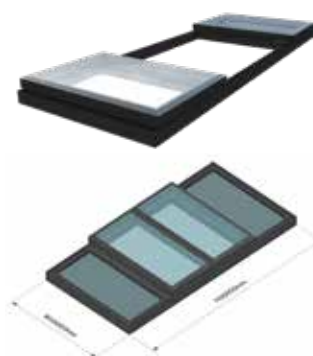

Single fan design limitation



Material:
6063-T5 Aluminium profile

Applicable space: Basement, Patio, Daylighting well, Swimming pool, Sunshine room, Roof

Open Method: Electric translation

Process craft: Welding and glue filling corner code splicing

Surface treatment: Whole window electrostatic powder spraying

Glass configuration (Selective):

laminated glass

5mm+27Ar+5mm

6mm+1.52pvb+6mm

5mm+22Ar+5mm+0.76pvb+5mm

Standard configuration:

DC Geared Motor

Patented control system

Mute waterproof switc

304 stainless steel solid bearing pulley

Solid steel reinforced corner code

45# solid gear rack (anti-corrosion treatment)

Automobile grade sealant strip

304 stainless steel track

Anti falling device




Selective Color: Colors customizeble (Cost different)

SR - S85


TRACKLESS SMALL PAN
SKYLIGHT



Note: This product quote does not include glass

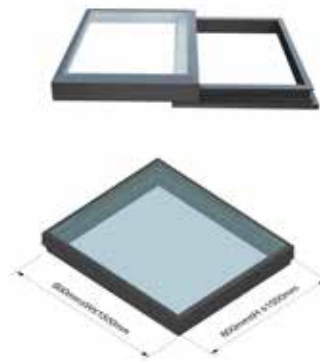

Single fan design limitation



Material:
6063-T5 Aluminium profile

Applicable space: Roof, Lightiwells, Basement and Sunrooms

Open Method: Electric translation

Process craft: Robot seamless welding

Surface treatment: Electrostatic powder spraying

Glass configuration (Selective):

laminated glass

5mm+27Ar+5mm

6mm+1.52pvb+6mm

5mm+22Ar+5mm+0.76pvb+5mm

Standard configuration:

Tubular Motor

Patented control system

Mute waterproof switch


Automobile-grade sealant strip



Selective Color: Colors customizable (Cost different)

SR - S85

RAILED SMALL PAN
SKYLIGHT

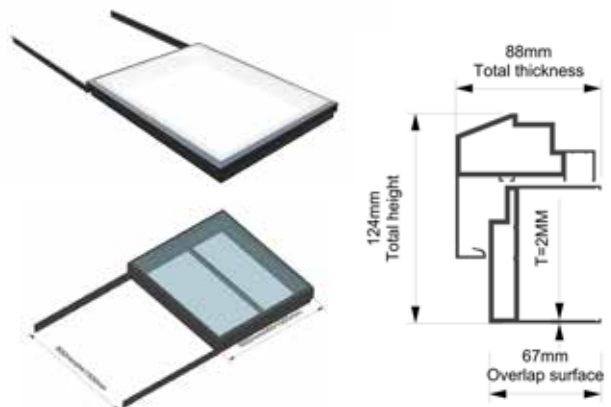

Single fan design limitation

Material:
6063-T5 Aluminium profile

Applicable space: Roof, Lighting well, Sunlight room

Open Method: Electric translation

Process craft: Robot seamless welding

Surface treatment: Electrostatic powder spraying

Glass configuration (Selective):
laminated glass

5mm+27Ar+5mm

5mm+0.76pvb+5mm

5mm+9Ar+5mm+0.76pvb+5mm

Standard configuration:

Tubular Motor

Patented control system

Mute waterproof switch


Automobile-grade sealant strip



Selective Color: Colors customizable (Cost different)

SR -128

ELECTRIC RISING
SKYLIGHT

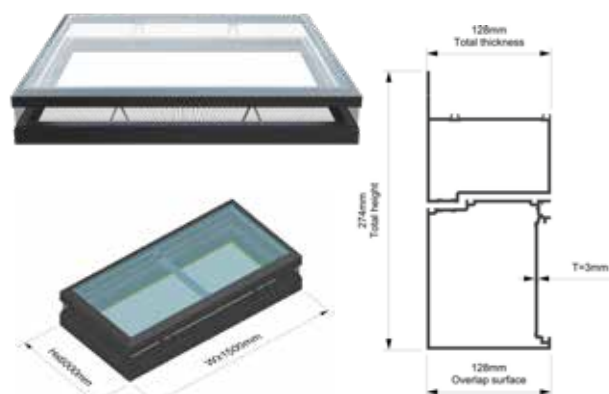

Single fan design limitation

Material:
6063-T5 Aluminium profile

Applicable space: Flat roof, Daylighting well, Basement, Patio and Sunshine room

Open Method: Electric level rise

Process craft: Robot seamless welding

Surface treatment: Whole window electrostatic powder spraying

Glass configuration (Selective):
laminated glass

5mm+27Ar+5mm

6mm+1.52pvb+6mm

5mm+22Ar+5mm+0.76pvb+5mm

Standard configuration:

DC Geared Motor

Patented control system

Mute waterproof switch

LED light

Automobile-grade sealant strip

Ring diamond gauze net



Selective Color: Colors customizable (Cost different)

SR -R70

ALUMINIUM ALLOY ROW
SKYLIGHT



Single fan design limitation

Material:
6063-T5 Aluminium profile

Applicable space: Roof, Daylight well, Basement

Open Method: Electric upper suspension
outward opening

Process craft: Robot seamless welding

Surface treatment: Whole window electrostatic
powder spraying

Glass configuration (Selective):

laminated glass

5mm+27Ar+5mm

6mm+0.76pvb+6mm

5mm+22A+5mm+0.76pvb+5mm

Standard configuration:

Chain Motor

Patented control system

Mute waterproof switch

LED light

Automobile-grade sealant strip




Selective Color: Colors customizable (Cost different)

SR -R85

INSULATED ALUMINIUM
SKYLIGHT



Note: This product quote does not include glass

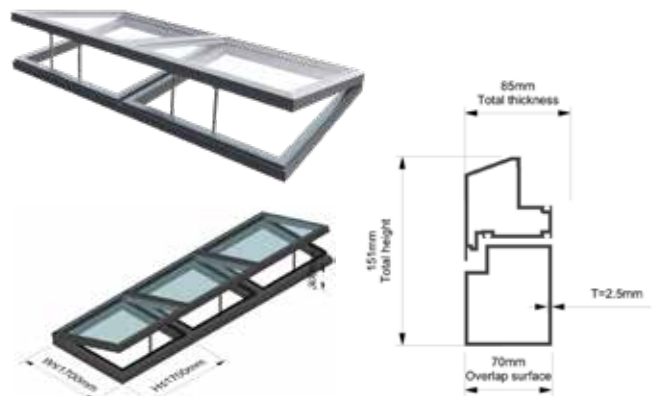

Single fan design limitation

Material:
6063-T5 Aluminium profile

Applicable space: Roof, Daylight well, Basement

Open Method: Electric upper suspension
outward opening

Process craft: Robot seamless welding

Surface treatment: Whole window electrostatic
powder spraying

Glass configuration (Selective):

laminated glass

5mm+27Ar+5mm

6mm+0.76pvb+6mm

5mm+22A+5mm+0.76pvb+5mm

Standard configuration:

Chain Motor

Patented control system

Mute waterproof switch


Automobile-grade sealant strip



Selective Color: Colors customizeble (Cost different)

SR -R20

ELECTRIC SUNROOF FOR
GLASS ROOM

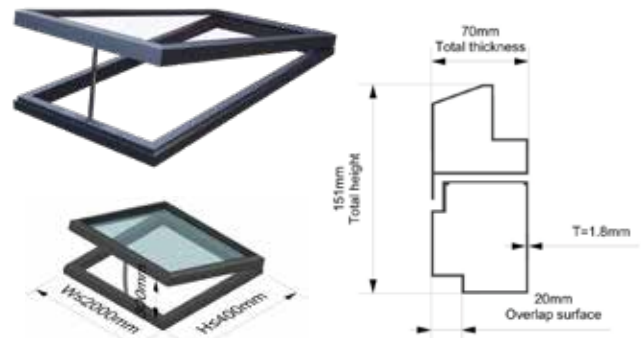

Single fan design limitation

Material:
6063-T5 Aluminium profile

Applicable space: Roof, Lighting well, Sunlight room

Open Method: Electric upper suspension outward opening

Process craft: Robot seamless welding

Surface treatment: Whole window electrostatic powder spraying

**Glass configuration (Selective):
laminated glass**

5mm+27Ar+5mm

6mm+0.76pvb+6mm

5mm+22A+5mm+0.76pvb+5mm

Standard configuration:

Chain Motor

Patented control system

Mute waterproof switch

Automobile-grade sealant strip




Selective Color: Colors customizable (Cost different)

SR –S110S

AUTOMATIC RETRACTABLE
GLASS ROOM



Note: This product quote does not include glass

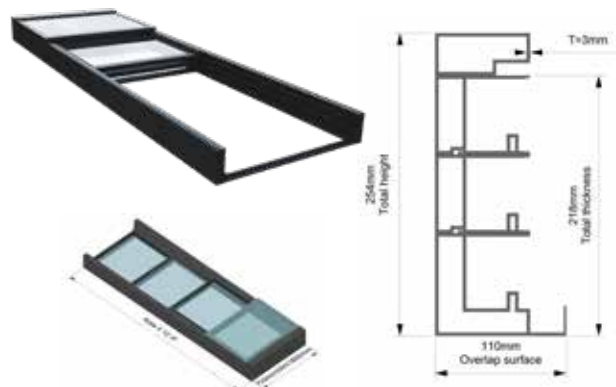

Single fan design limitation

Material:
6063-T5 Aluminium profile

Applicable space: Roof, Lighting well, Basement, Stairwell and Sunshine room

Open Method: Electric translation

Process craft: Robot seamless welding

Surface treatment: Whole window electrostatic powder spraying

Glass configuration (Selective):
laminated glass

5mm+0.76pvb+5mm

6mm+0.76pvb+6mm

Standard configuration:

DC Geared Motor

Patented control system

Mute waterproof switch

Automobile-grade sealant strip



Ys804

Ys824

Ys821

Ys825

Ys822

Ys826


Ys823

Ys827


Selective Color: Colors customizable (Cost different)

SR - S180

MOBILE SUNROOM

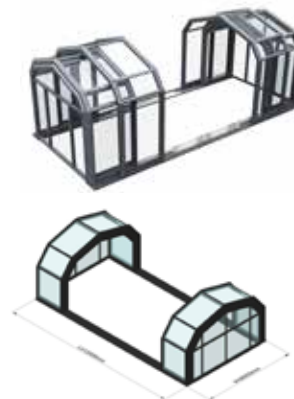

Single fan design limitation



Material:
6063-T5 Aluminium profile

Applicable space: Swimming pool, Spa pool, Rooftop, Restaurant, Cafe, Lounge Space

Open Method: Electric Translation

Surface treatment: Whole window electrostatic powder spraying

Glass configuration (Selective):

laminated glass

5mm+27Ar+5mm

6mm+0.76pvb+6mm

5mm+22Ar+5mm+0.76pvb+5mm

Standard configuration:

Worm gear motor

Wireless solar rain sensor

Wireless remote

LED light


Mobile Remote Control



Selective Color: Colors customizeble (Cost different)



INTERIOR DOOR

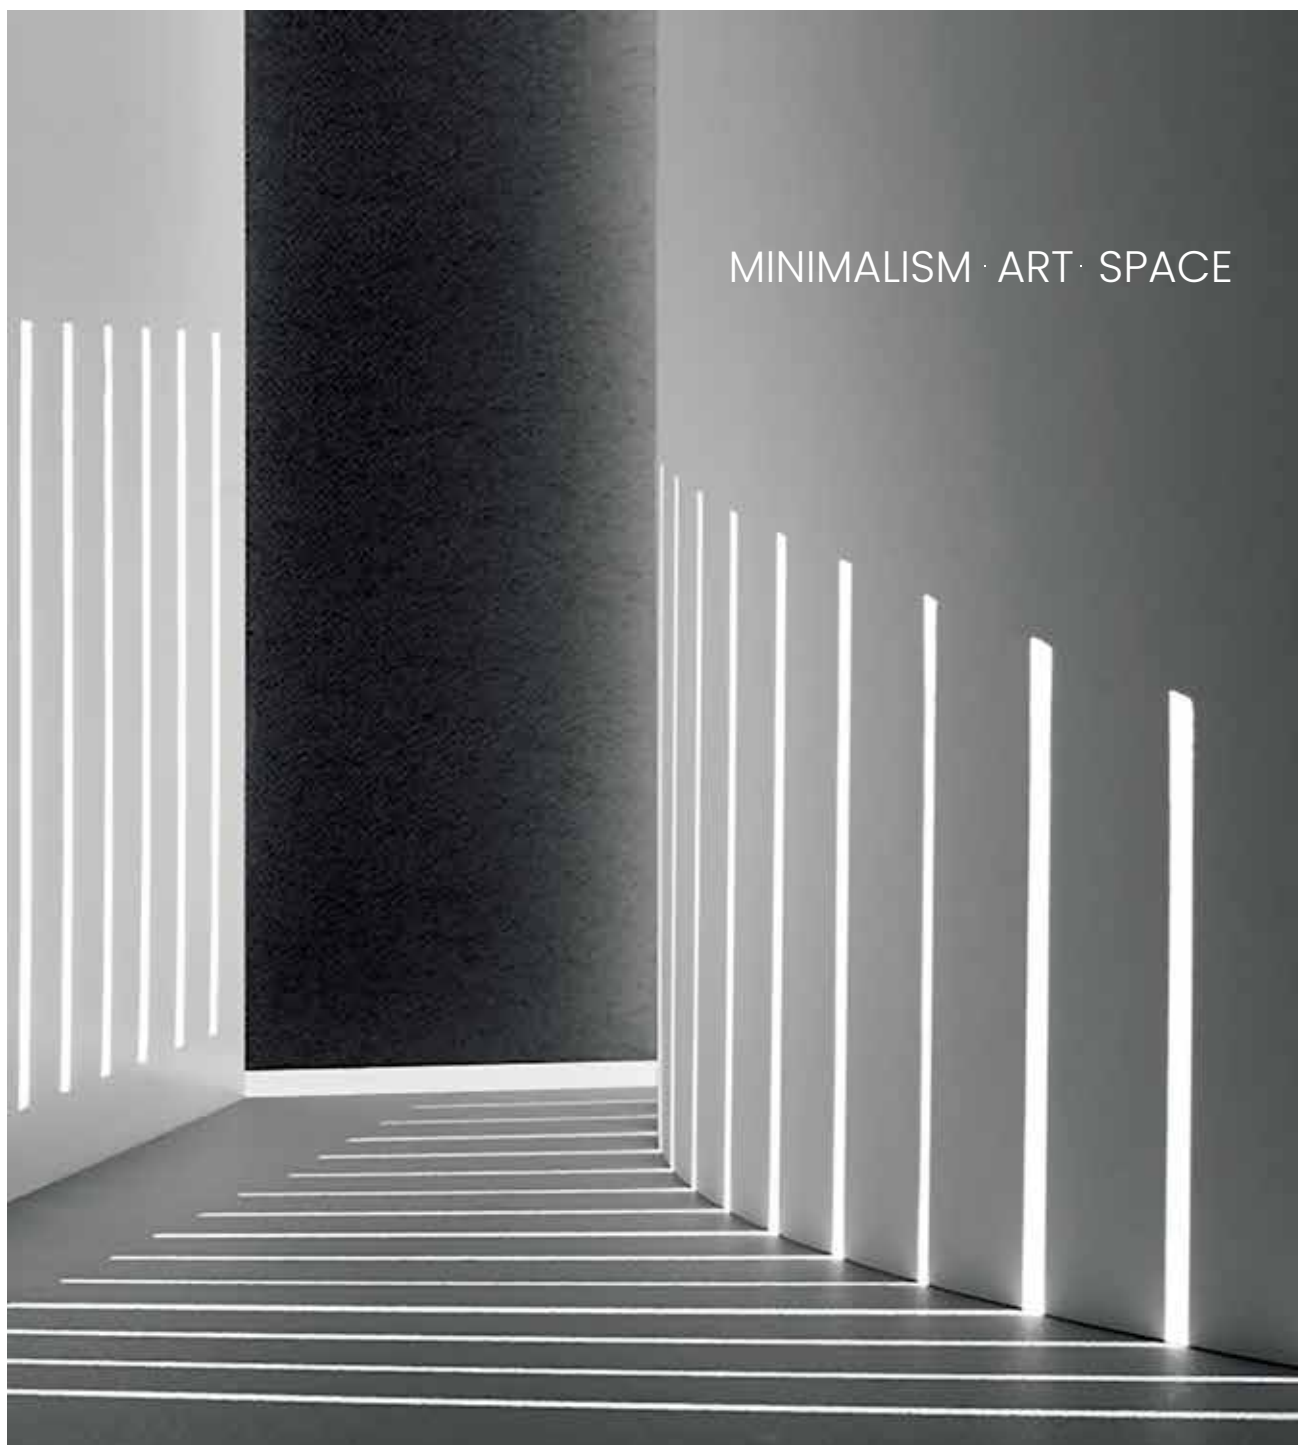


EXPLORE THE BEAUTY OF LIFE


Open every door of life in the purest way



Minimalist home customisation makes your home more loving

The minimalist door, with its exquisite texture, exudes urban luxury and fashion. Its classic and stylish design, along with years of exquisite craftsmanship and refined taste, allows the door to resonate with the aura of the person wearing it. It transforms the door from a mere door into a work of art for living.

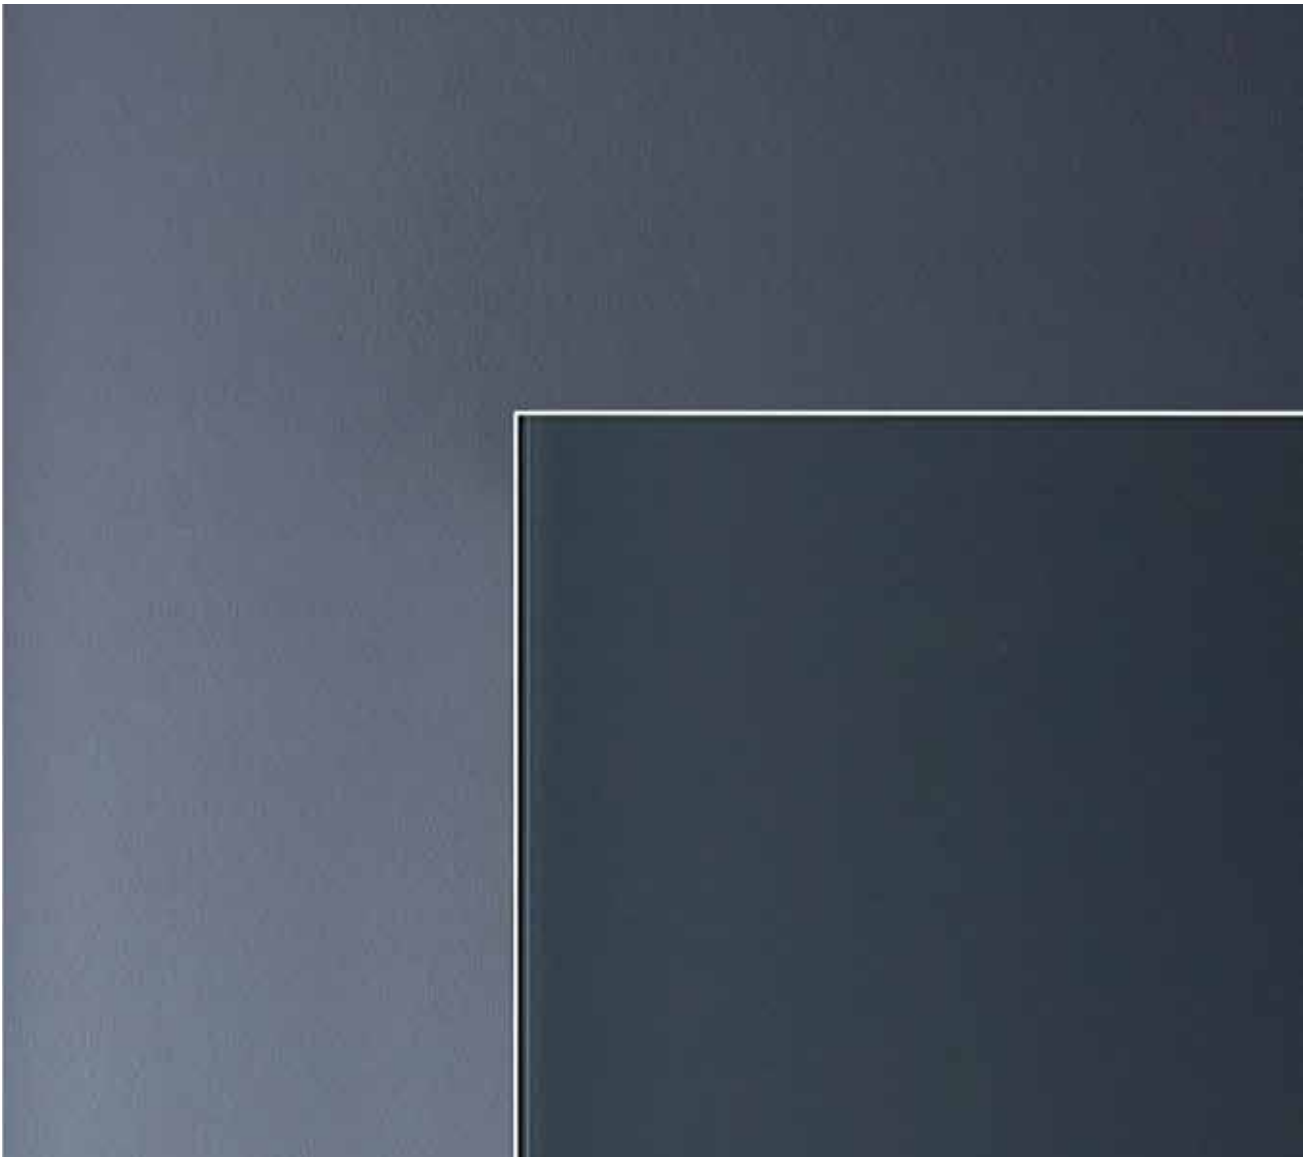

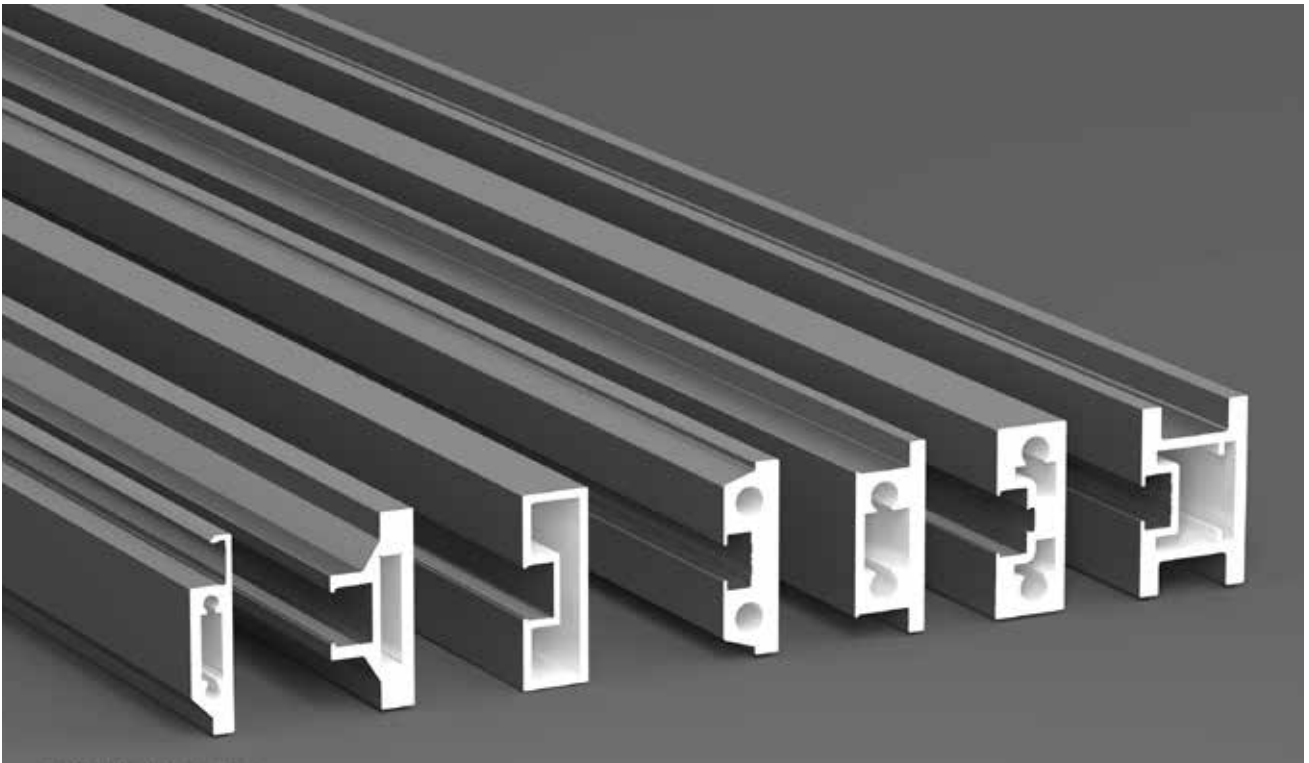

OPTIONAL OPTICAL ENTERPRISES





HANGING SLIDING DOOR

DESIGN OF MINIMALIST SPACE

Special design style to create different home atmospheres and discover unexpected beauty. Both function and beauty are emphasised, with a narrower border, a more minimalist appearance, and a delicate touch.



HANGING SLIDING DOOR



Monorail sliding door




Double-track sliding door




Triple linkage sliding door

ULTRA NARROW SLEEVE

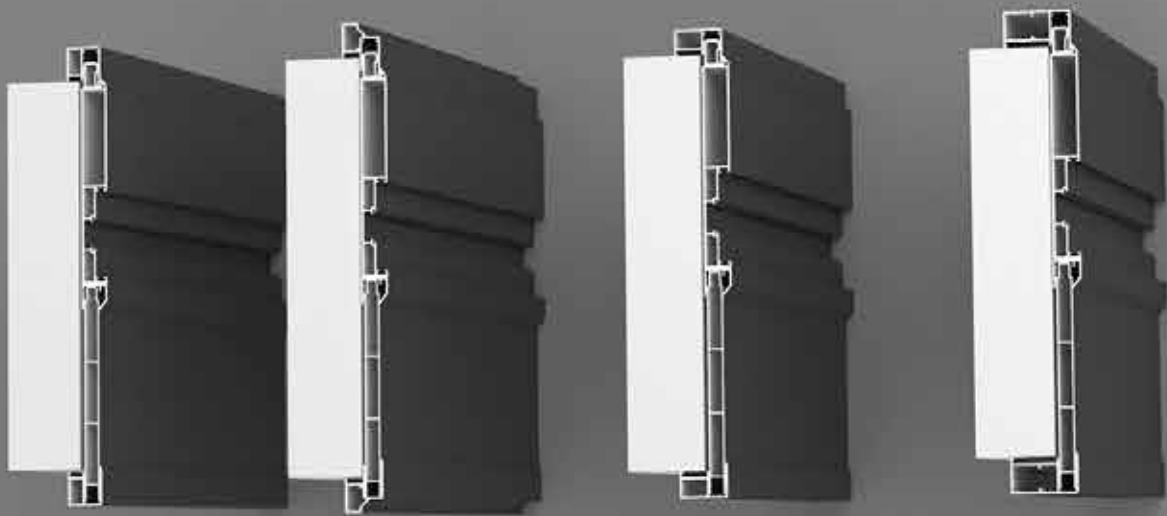

8mm



11mm



15mm



26mm

THE MINIMALIST LIGHT OF LUXURY STATE

Its minimalist visual appeal, time-saving, convenient, and practical features are harmoniously combined, making it both irresistible and utterly captivating.



Special design style to create different home atmospheres and discover unexpected beauty. Both function and beauty are emphasised, with narrower borders and a more minimalist and delicate touch

Build a high taste of life, the pursuit of fashion and contracted, remove the multifarious and impetuous, return to naturalness, a high-quality leisure life, life for the perfect deduce.





The glass door wall partition eliminates the boundary between the door panels and frames, making them perfectly coplanar with the wall. Various exquisite designs simplify the spatial structure while retaining the overall sense and fluidity of the space.



Customize according to personal preferences, do whatever you want, beyond your imagination.



Not limited to limited space, when a sense of structure intervenes light and shadow add depth to the space


Design is seen in whole, fully hidden in details, exploring the details with care, and touching the inherent quality




OPTIONAL TRACK SYTEM




Monorail Shock Absorbing Track
Track dimensions: 47.8*87.8

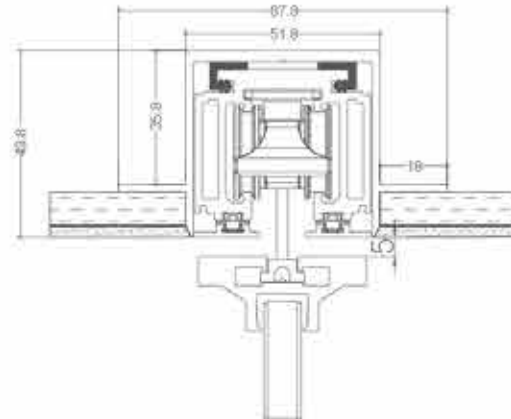

Double rail shock-absorbing track
Track dimensions: 47.8*144.8

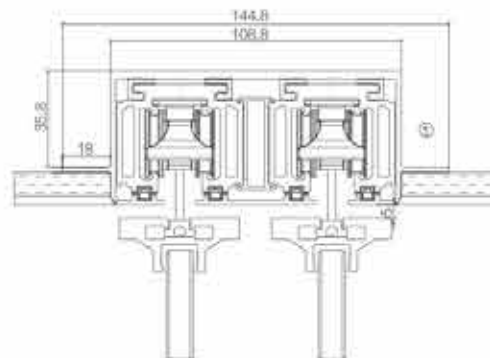


Three-rail shock-absorbing track
Track dimensions: 66*187.8

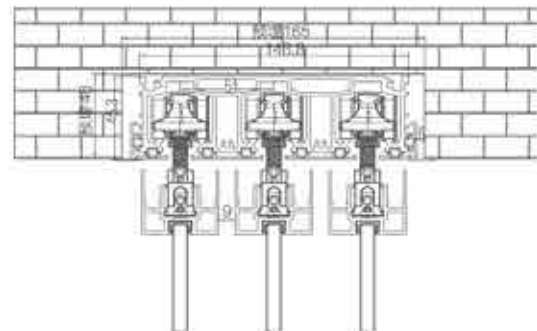


OPTIONAL TRACK SYTEM




Monorail hanging rail
Track dimensions: 78*58

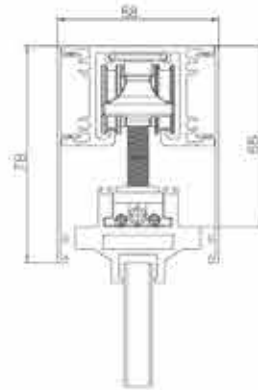


Double rail hanging rail
Track dimensions: 78*115

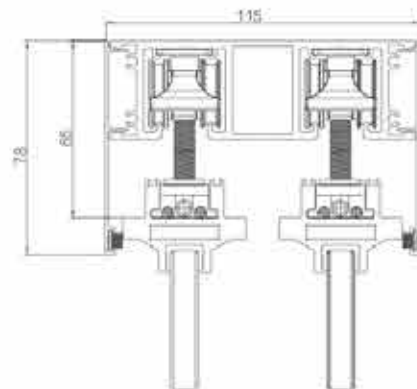


Three-rail hanging rail
Track dimension: 78*172

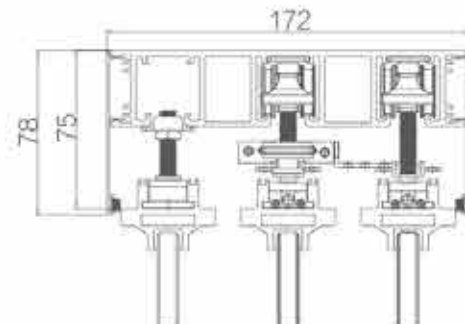


OPTIONAL TRACK SYTEM

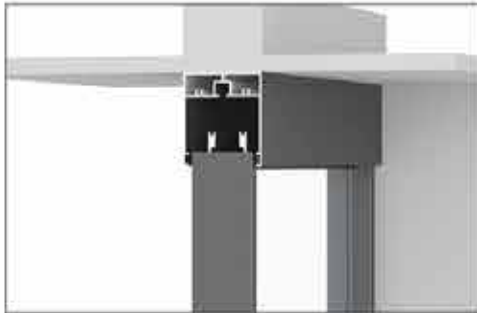


Monorail push-pull track
Track dimensions: 47.8*87.8

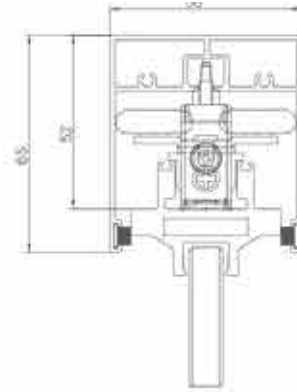

Double-track push-pull track
Track dimensions: 47.8*144.8

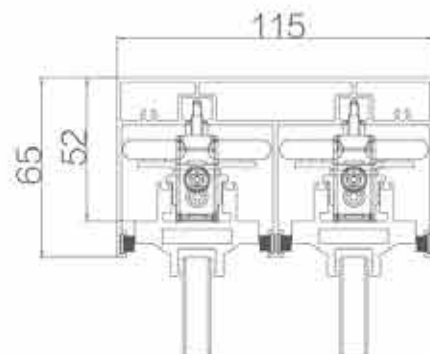

Three-track sliding track
Track dimensions: 66*187.8

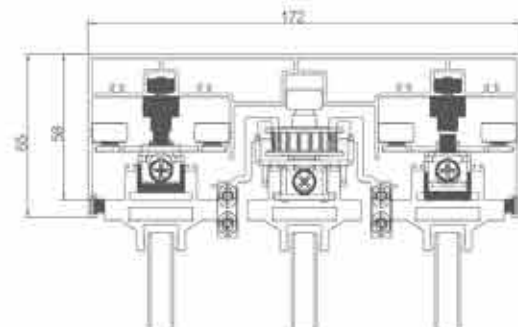

LINEAR STEEL WIRE SUSPENSION RAIL

- High performance
- High quality
- Attractive design




025 / 026


FLAT DOOR SERIES




Italian-style cloud mirror double-walled hinged door assembly diagram

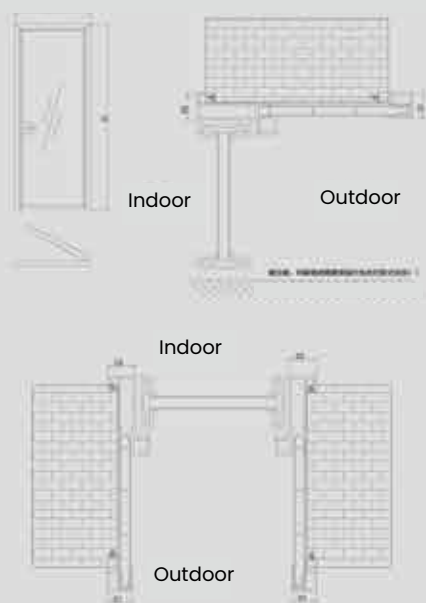


Italian-style Yunde single-package hinged door assembly diagram

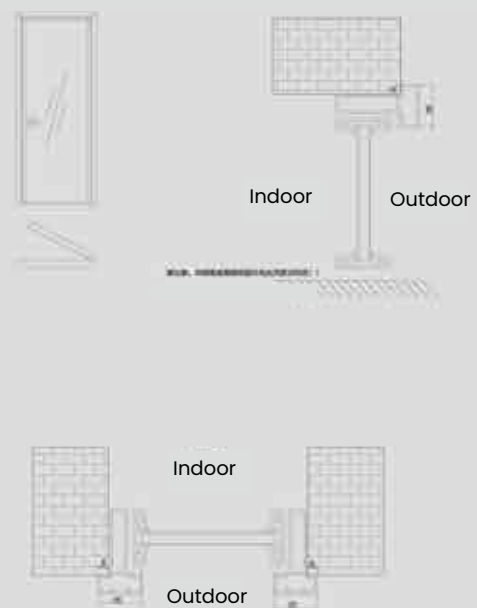

Ultra-narrow flat double pack

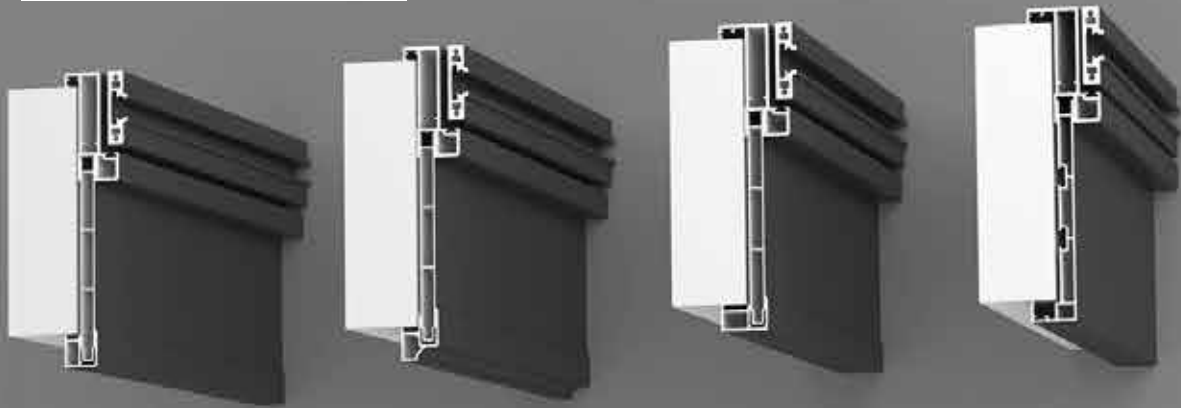

Optional Optical Enterprises

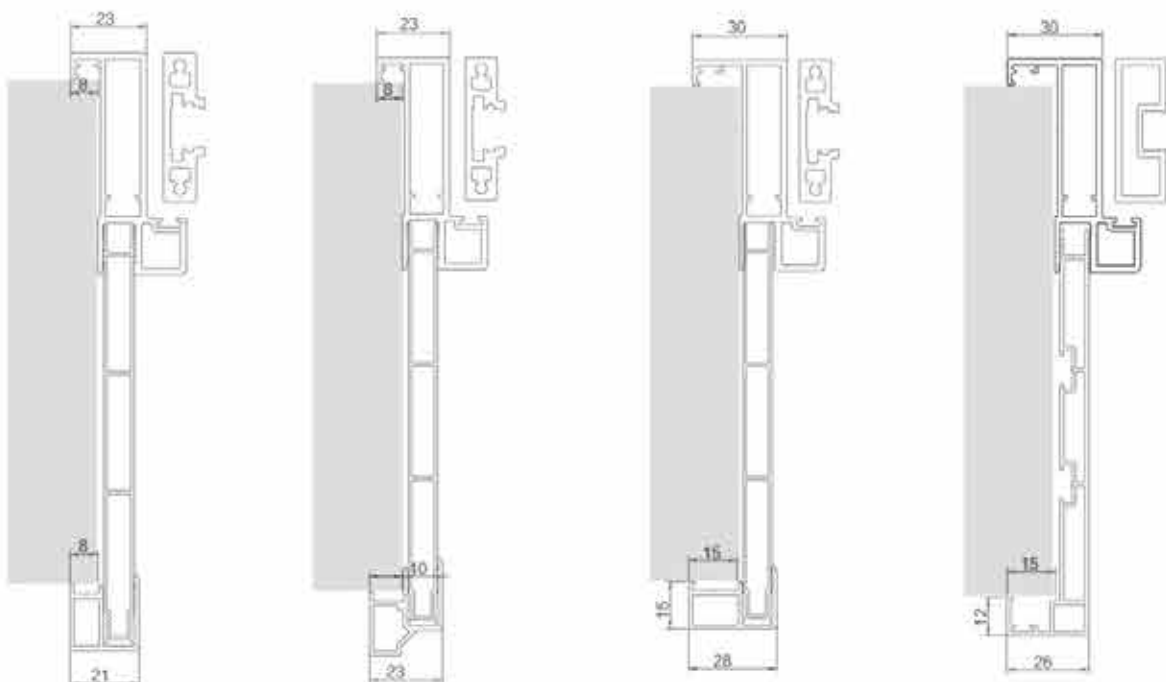

Not limited to a limited space, when a sense of structure intervenes, light and shadow add depth to the space









HANGING DOOR SERIES

HANGING DOOR SERIES

Monorail Shock Absorbing Track



Double rail shock-absorbing track

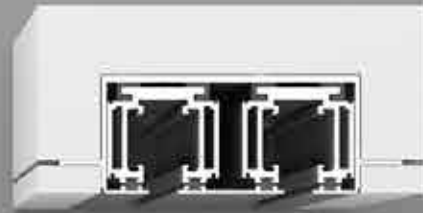

Monorail Hidden Track



Double track hidden track



TL16



TLX4



TL18



TL28



Pocket doors can effectively solve the partition problem of short front and rear distances and small door openings, hiding everything in between

Every door is a loyal listener of the story. The noble and elegant tone is the percipitation of years. It is rich and delicate.





Design is seen in the whole, fully hidden in the details, exploring the details with care, and touching the inherent quality





Traditional Japanese style building a reasonable sense of order for minimalism with simple yet extraordinary details creating every bit of BEAUTY OF LIFE

Cultivating a refined taste for life, it pursues modern style and simplicity—eliminating unnecessary complexity to create a natural, high-quality, and leisurely living experience.





In modern life, we are constantly surrounded by noise and endless distractions. Only a few truly pause to experience the calm, imagination, and relaxation that minimalist living offers.

Where elegance meets innovation—the hidden track suspension door appears to float effortlessly, bringing smooth movement, refined design, and creative charm to modern spaces.



ITALIAN LIGHT AND SHADOW SERIES



Italian-style
singlet-track lighting



Italian-style
dual-track lighting



Italian-style
three-track lighting





An extraordinary expression of innovation and sophistication, the Ezzodors Italian Light & Shadow System Sliding Door harmoniously integrates advanced technology with refined aesthetics. Designed for diverse spatial applications, it creates seamless transitions between spaces, redefining the concept of modern partitions. Light, elegant, and fluid in movement, it delivers a graceful balance between design, functionality, and architectural beauty.





Simple hollow partitions and classic grille design bring timeless and shadowy tables. The light and shadow effect is luxurious with a hint of mystery





Within every heart exists a rich and complex emotional world. The Ezzodoors Retro Sliding Door Series is inspired by collage art—seamlessly bringing together light, space, and emotion to transform your home into a place where life's moments beautifully intersect.




ITALIAN LIGHT AND SHADOW SERIES

The Ezzodoors Italian Light & Shadow System represents five generations of innovation, combining ultra-slim frame design with refined Italian craftsmanship. Every detail is engineered to deliver world-class performance and modern elegance.


Built with advanced technology and precision manufacturing, it offers excellent durability, resistance to moisture and corrosion, fade protection, and effective sound insulation.

Designed for versatile applications, the system integrates seamlessly into spaces such as living rooms, study rooms, and balconies. Elegant, flexible, and functional, it redefines modern spatial design while enhancing both interior and exterior environments.

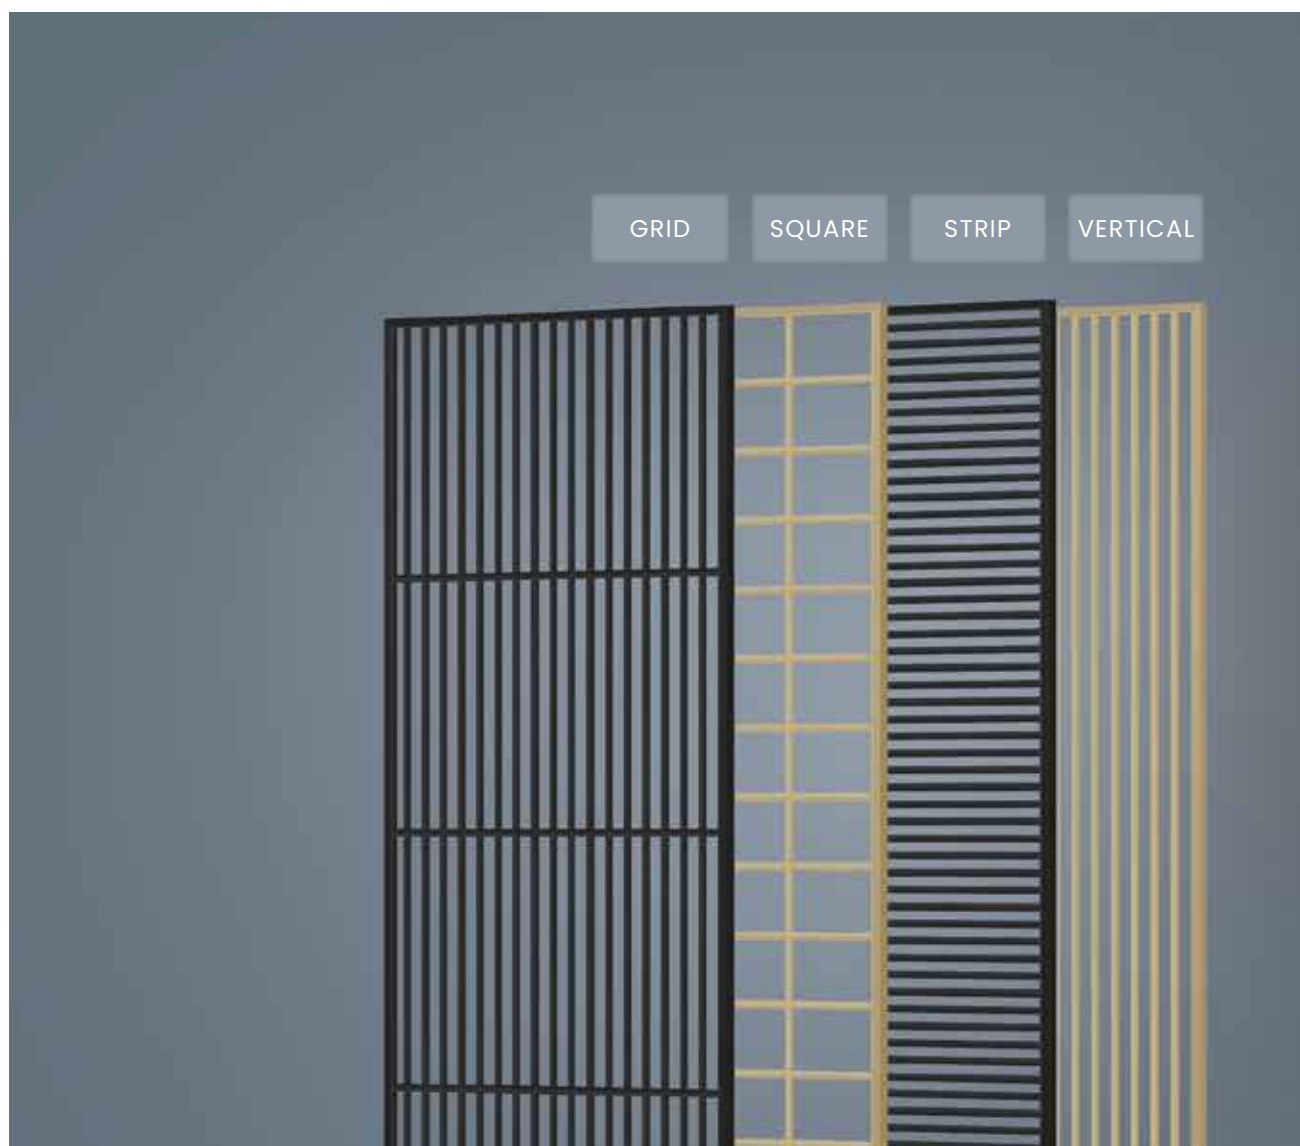



Build a high taste of life, the pursuit of fashion and contracted, remove the multifarious and impetuous, return to naturalness, a high-quality leisure life, life for the perfect deduce.

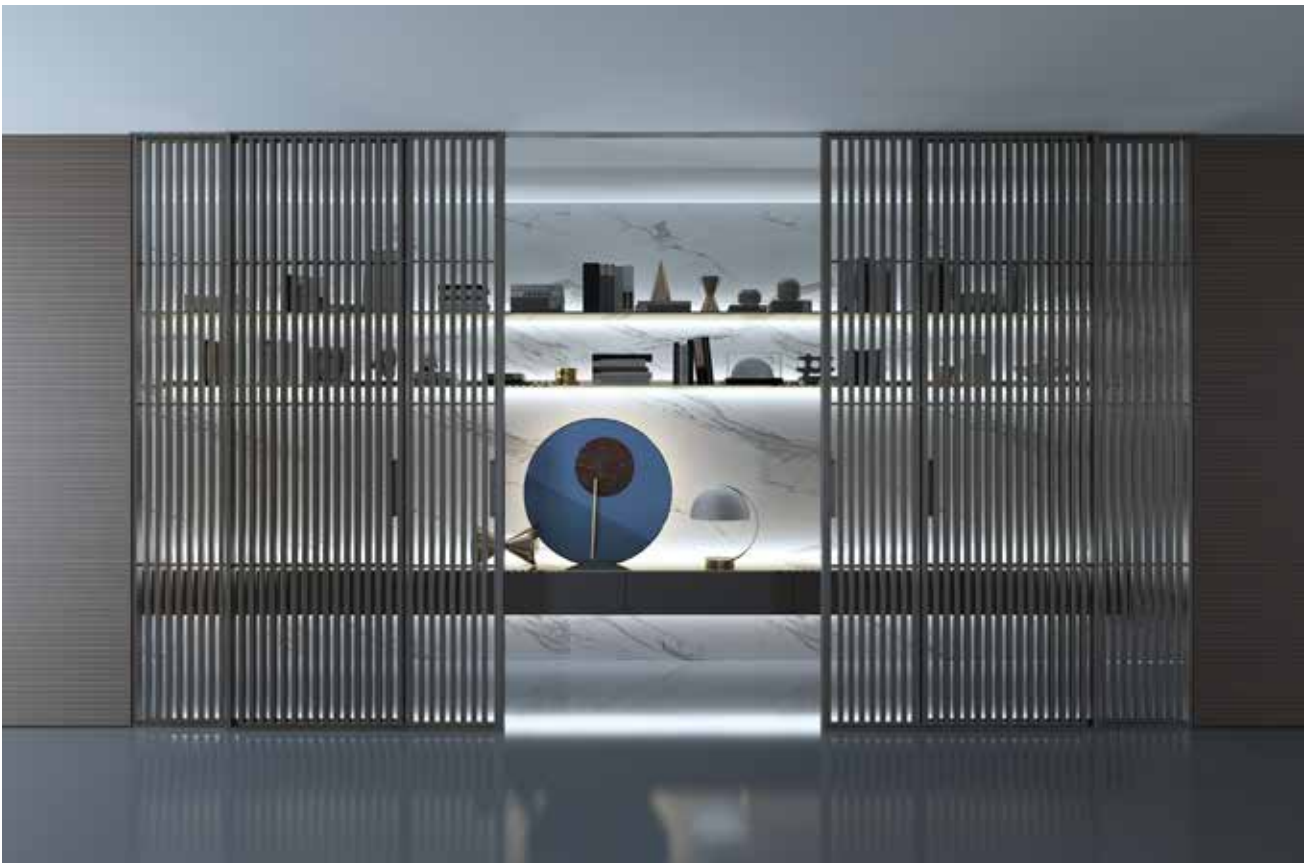

ITALIAN STYLE LIGHT AND SHADOW SWING DOOR SERIES



Italian-style light and shadow open




Italian-style light and shadow double-sided flat opening




Italian-style light and shadow double-sided flat opening


Italian-style double-sided swing door assembly diagram

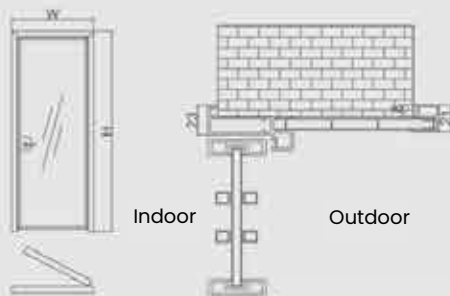

Please note: The height of the mounting legs needs to be determined based on the style of the hinges!

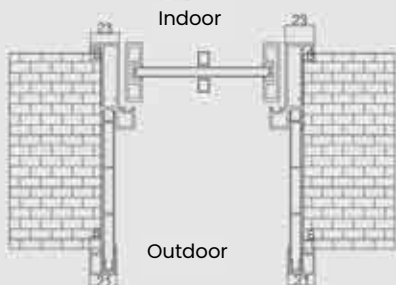

Italian-style light and shadow single-pack hinged door assembly diagram

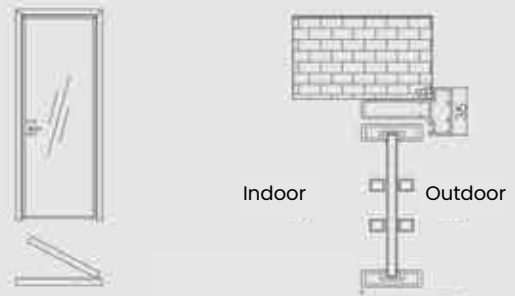

Please note: The height of the mounting legs needs to be determined based on the style of the hinges!





Not limited to limited space, when a sense of structure intervenes, light and shadow add depth to the space



ITALIAN GRID DOOR SYSTEM



Italian-style
singlet-track lighting



Italian-style
dual-track lighting




Italian-style
three-track lighting






Special design style to create different home atmospheres and discover unexpected beauty. Both function and beauty are emphasised, with narrower borders and a more minimalist and delicate touch.

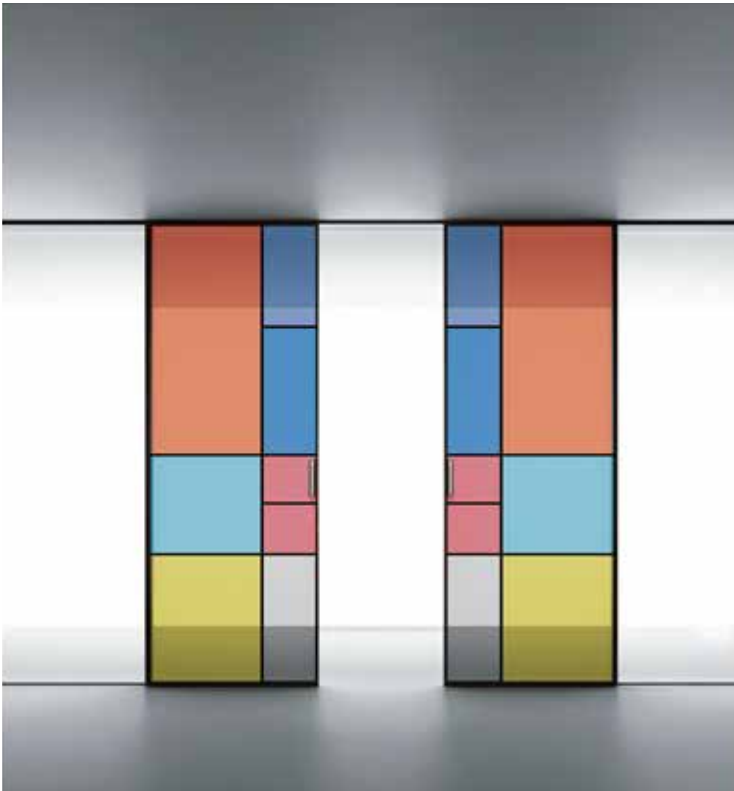

It is more than a choice of design—it is a reflection of a lifestyle and a state of mind. An expression of aesthetics and a quiet dialogue between people and space. A gentle presence in the living room, bringing comfort to the soul and harmony to the home. It is a graceful balance of beauty and calm, where elegance meets inner peace.



Traditional Japanese style creates a sense of order for minimalism, using simple yet extraordinary details to create the beauty of everyday life.

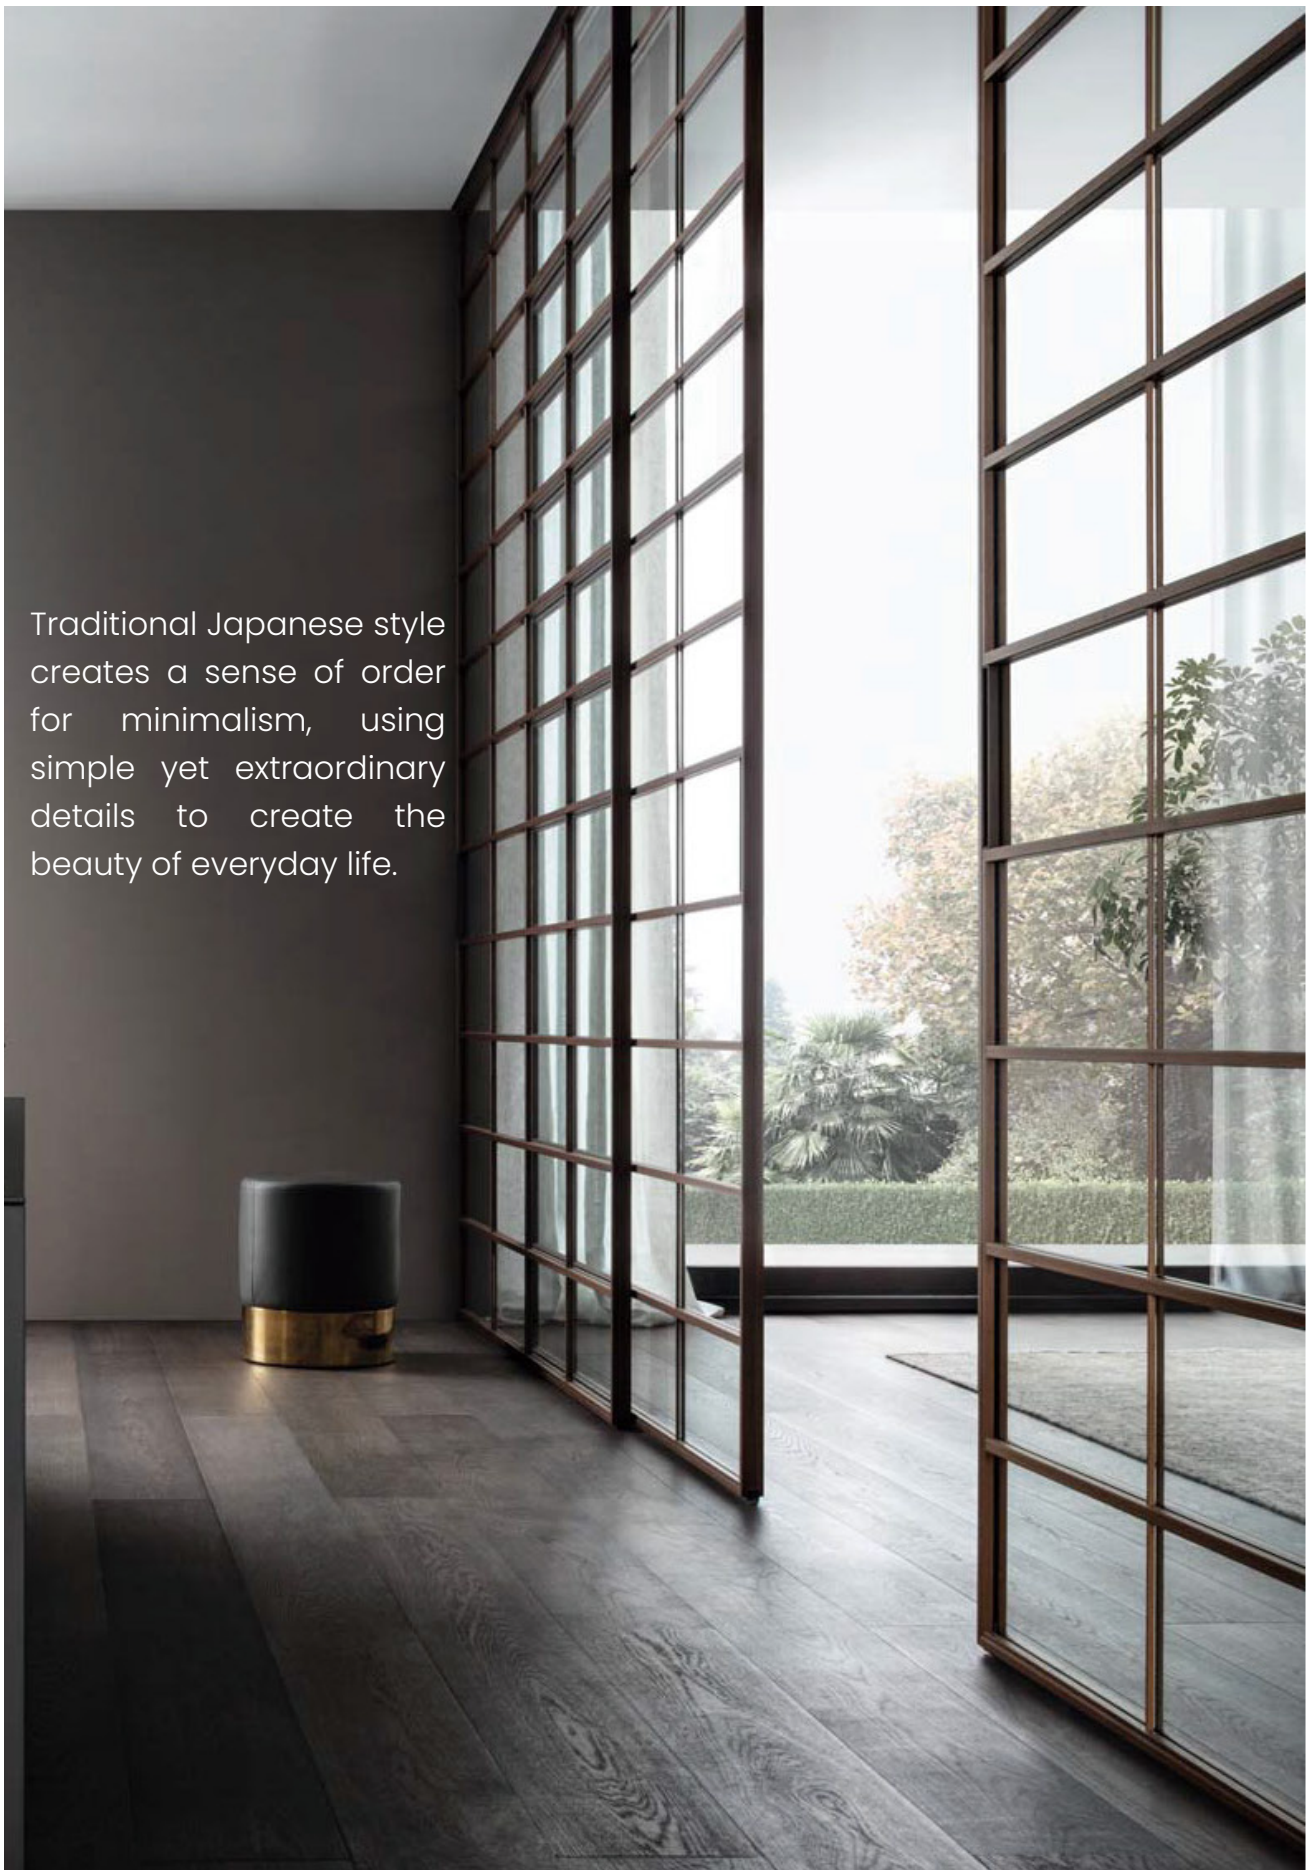

PARTIAL GRID STYLE



JZ-01



JZ-02



JZ-03



JZ-04




JZ-05



JZ-06



JZ-07



JZ-08



JZ-09



JZ-10



JZ-11



JZ-12



JZ-13



JZ-14



JZ-15



JZ-16



JZ-17



JZ-18

ITALIAN STYLE MODULAR SWING DOOR SERIES



Italian-style light and shadow open




Italian-style light and shadow double-sided flat opening




Italian-style light and shadow double-sided flat opening


Italian-style patchwork double-sided hinged door assembly diagram

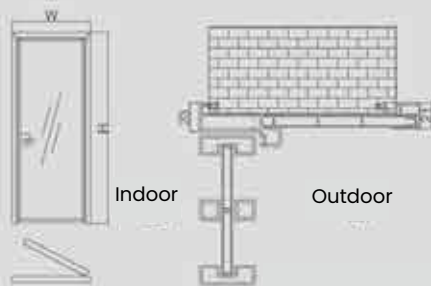

Please note: The height of the mounting legs needs to be determined based on the style of the hinges!

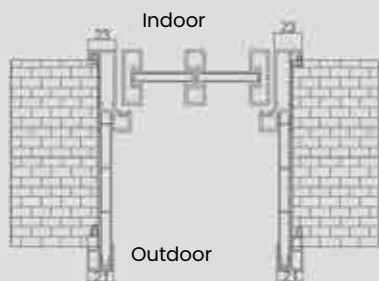

Italian-style patchwork single-pack hinged door assembly diagram

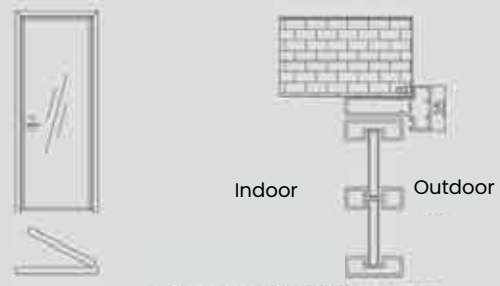

Please note: The height of the mounting legs needs to be determined based on the style of the hinges!




Traditional Japanese style creates a sense of order for minimalism, using simple yet extraordinary details to create the beauty of every day life.





Every door is a loyal listener of the story; The noble and elegant tone is the precipitation of years. It is rich and delicate. In the face of such a home every time, it is stable and indifferent, and the secular disputes melt in an instant.

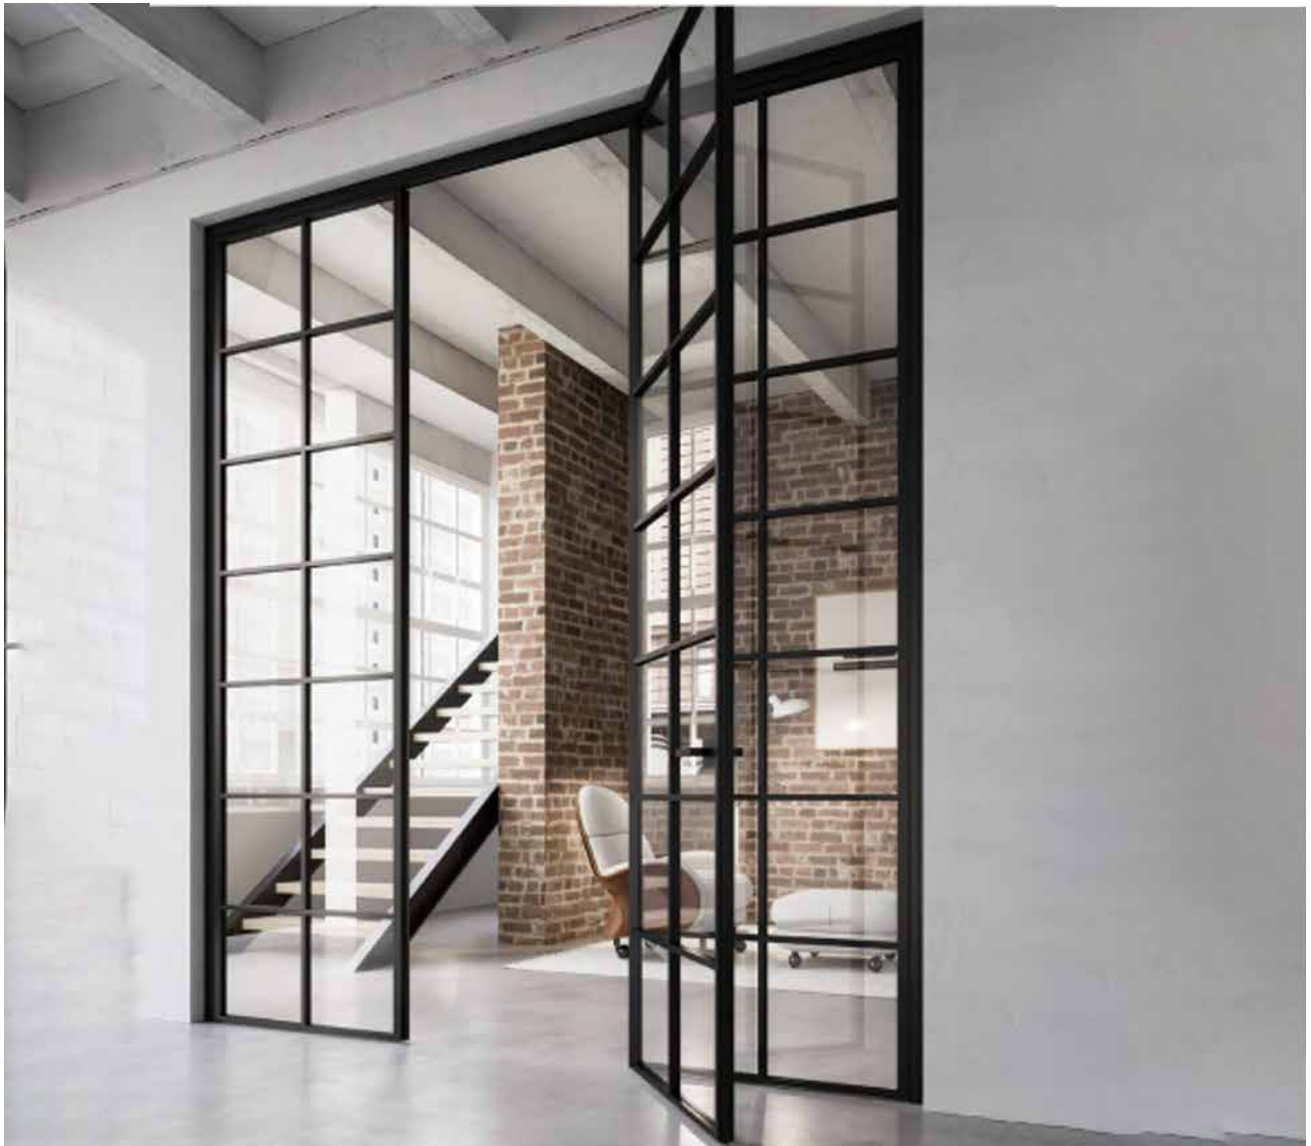

FRENCH VINTAGE DOOR SERIES



French retro
monorail



French retro
double track



French retro
three-track





Traditional retro style Building a reasonable sense of order for minimalism, with simple yet extraordinary details, Creating Every Bit of Beauty in Life.



FRENCH RETRO SWING DOOR SERIES



French retro style
flat bag




French retro style, white reverse
wrapping, flat opening






French retro style
double-sided open

French retro double-door
swing door assembly diagram

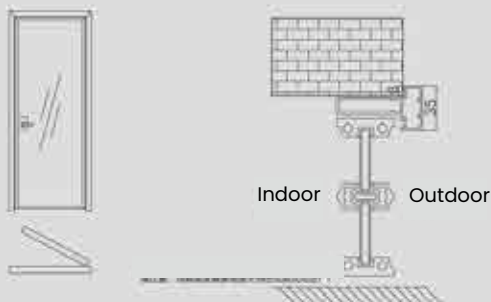


French retro single-door
bag assembly diagram

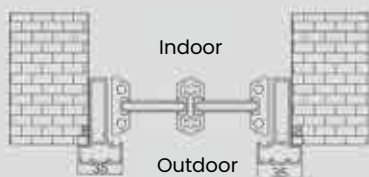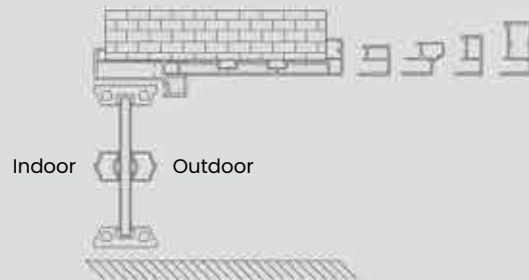

Through the harmonious fusion of light, shadow, and artistic design, the Ezzodoors Retro Glass Swing Door becomes a statement piece within the space—delivering a striking and refined visual experience.



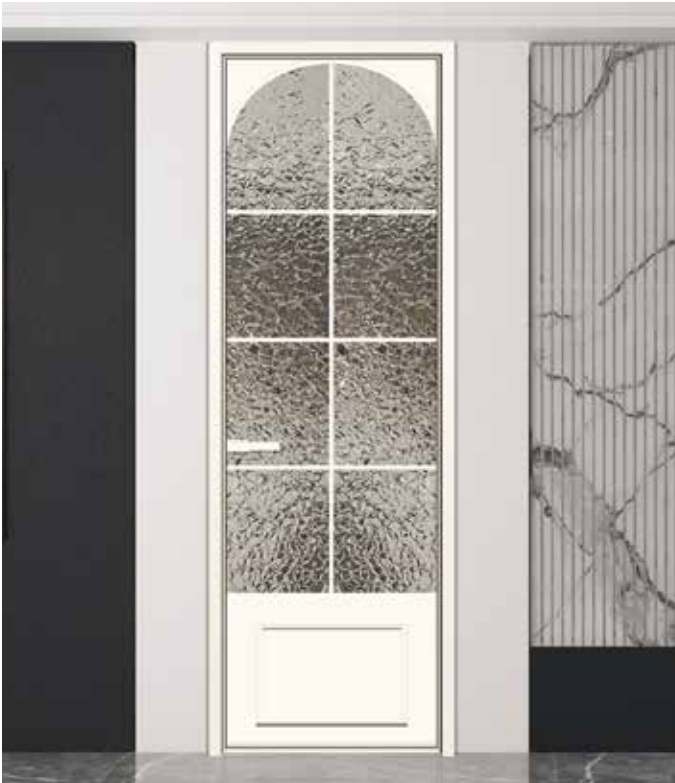

A harmonious fusion of light, shadow, and art—the Ezzodoors Retro Glass Swing Door transforms space into a stunning visual statement.

Quiet rather than ostentatious, it reveals beauty with subtle elegance—creating a space that feels calm, inviting, and truly worth coming home to.



ITALIAN STYLE FLEXIBLE DOOR SERIES




ZM18



ZMX4

ITALIAN STYLE FLEXIBLE DOOR ASSEMBLY DIAGRAM

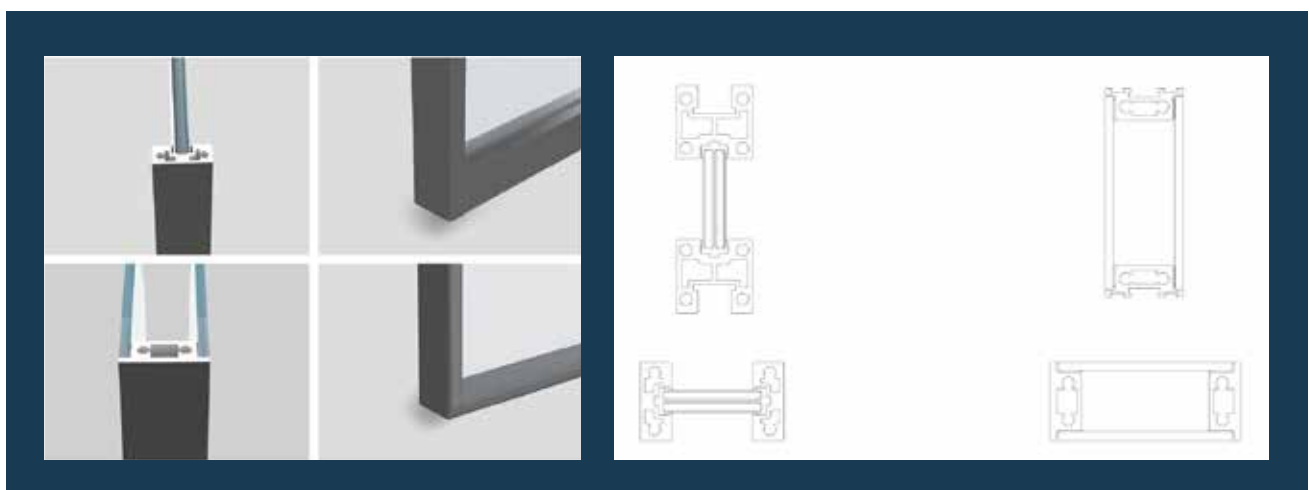

Like a hidden doorway within the home, it creates a refined and intimate space where tranquility and design meet. Whether placed in the kitchen, living room, or study, the Ezzodoors Revolving Door introduces a distinctive charm and a touch of playful elegance to the interior.



A hidden doorway within the home—bringing tranquility, elegance, and a unique sense of charm to kitchens, living rooms, and study spaces.



MINIMALIST AXIS GATE


Crafted from high-quality aluminum alloy and processed with advanced techniques, these partition doors deliver exceptional decorative appeal. Available in a variety of colors and designs with a refined glossy finish, the slim frame structure allows for large panel configurations, maximizing versatility for different spaces. Modern, elegant, and highly functional, they enhance both the aesthetics and practicality of contemporary interiors.



ITALIAN MULI SERIES



60-9 Outward-opening
concealed door (semi-enclosed)

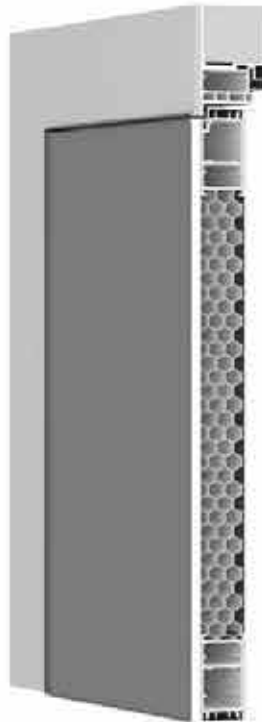

60mm plastering with flat exterior
and open interior + (9mm plywood)




60mm plastering style with
outward flatness and opening

Italian-style wooden door series assembly diagram


60mm plastering with flat exterior and open interior + (9mm plywood)

Wall thickness ≥ 59

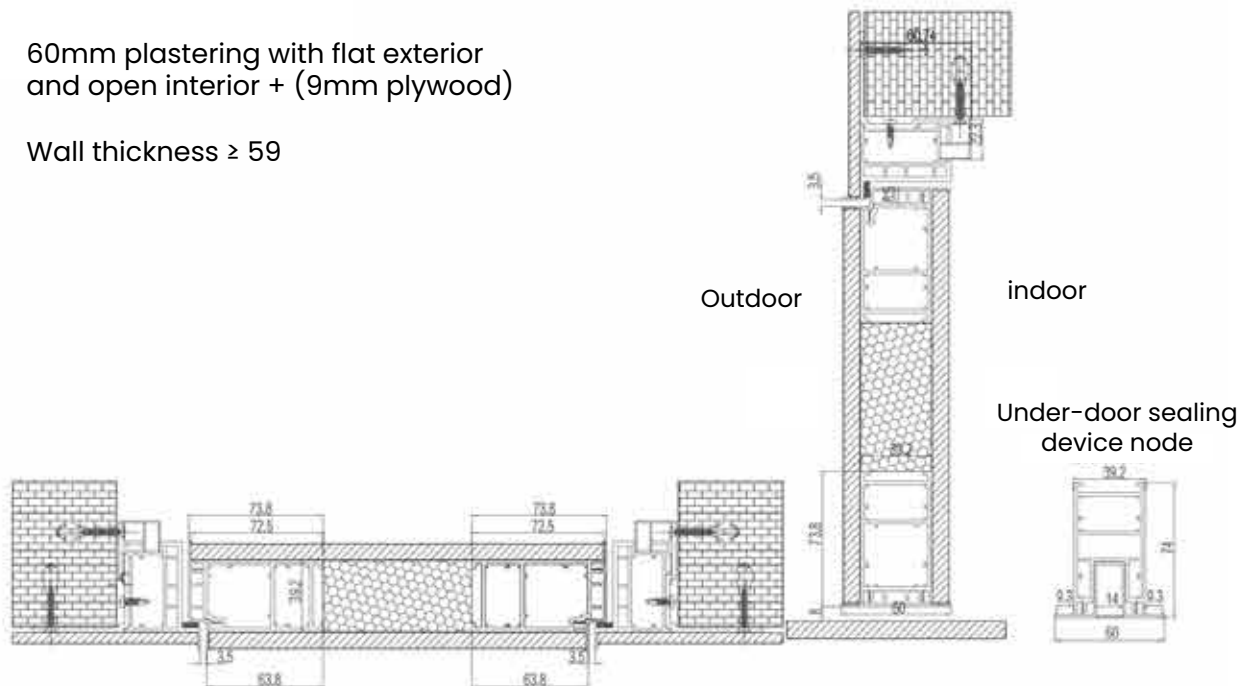

60mm plastering style with outward flatness and opening

Wall thickness ≥ 59

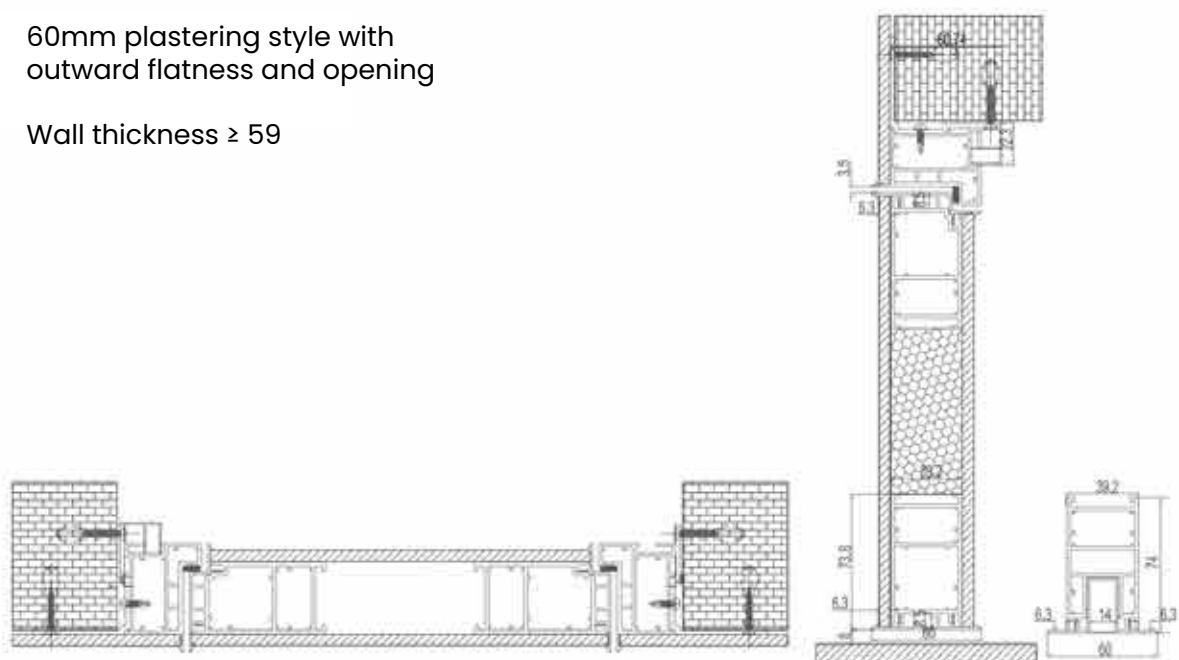



Like a hidden masterpiece within the home, it reveals a refined space where tranquility and design meet. Whether placed in the kitchen, living room, or study, the Ezzodors Revolving Door introduces a unique sense of charm and a touch of playful elegance.

The Ezzodors integrated door-and-wall design concept creates a seamless connection between door and wall, forming a clean and refined visual experience. This thoughtful design brings modern elegance while enhancing the sense of openness and spatial harmony within the home.





Where natural beauty meets modern design, a deeper charm unfolds within the space. The delicate surface texture enhances the essence of nature, revealing its beauty in its purest form while adding a unique and refined character to the environment.

A harmonious blend of natural beauty and modern design—delicate textures reveal nature's elegance while adding a unique charm to the space.




ITALIAN INFINITE WIND SERIES



Italian style infinite
dual-track



Italian infinite wind
three tracks

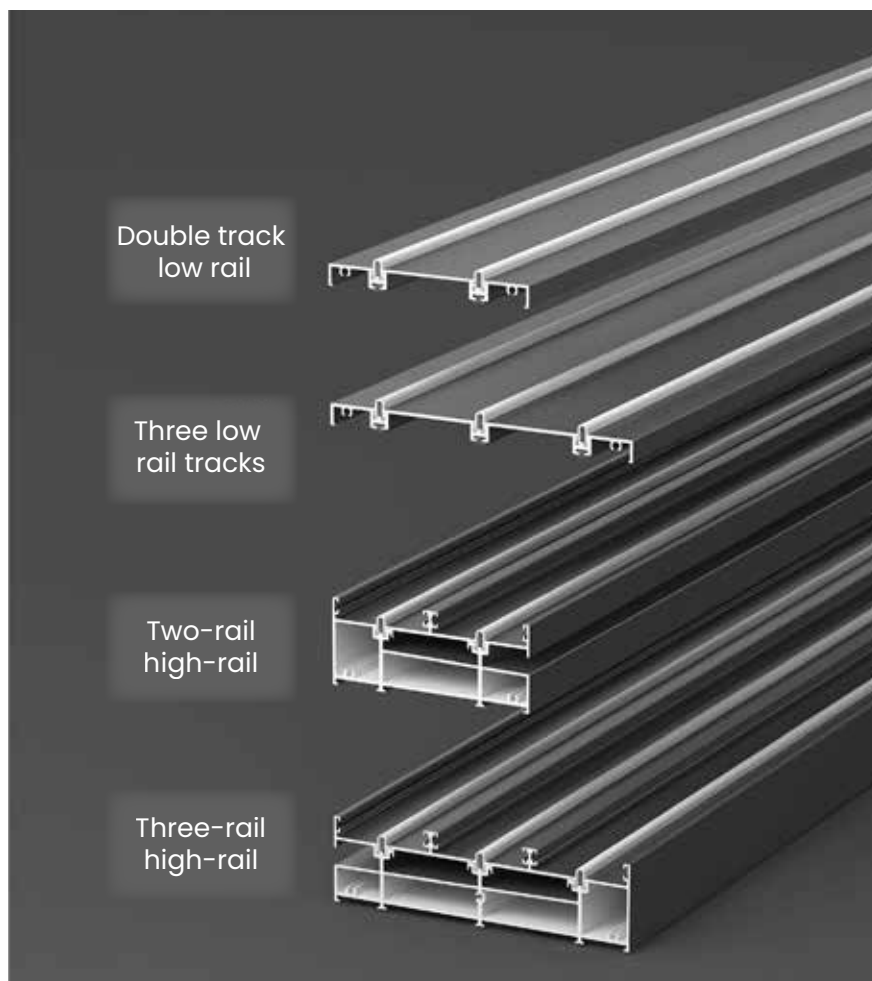

Designed for exceptional durability, the system maintains its stability in extreme temperatures—resisting deformation in heat and brittleness in cold conditions. Built to withstand severe weather, it provides dependable protection even during powerful Category 12 typhoons. The double-layer automotive-grade tempered glass panels allow generous natural light while delivering superior strength and safety.



In response to the demand of the domestic market, if the door opening is not completely vertical, we provide you with the following door sets. Integrate data parameters to solve the problem of gaps between doors and walls:

32 square sleeve line pressure wall: 9mm



15 square sleeve line pressure wall: 15mm



45 square sleeve line pressure wall: 22mm



55 square sleeve line pressure wall: 32mm



Two track sliding door

Wall thickness: double-sided single-sided paneling, minimum thickness 133mm (using 32mm flat trim).

Wall thickness: double-sided single-sided paneling, minimum thickness 130mm (using 38/45/55 flat bead trim).

Wall thickness: single-sided semi-enclosed wall without panels, minimum thickness 115mm (using 32/38/45/55mm flat veneer).

Three track sliding door

Wall thickness: double-sided single-sided paneling, minimum thickness 183mm (using 32mm flat trim).

Wall thickness: double-sided single-sided paneling, minimum 180mm (using 38/45/55 flat bedding trim).

Wall thickness: single-sided semi-enclosed wall without panels, minimum thickness 170mm (using 32/38/45/55 flat bedding).


Selective Colour




Partial Glass Style




Schematic Diagram of Opening Mode

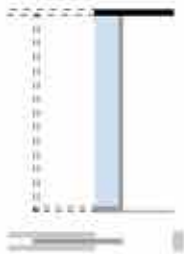


Single-track single-leaf wall-mounted sliding door, single-leaf wall-mounted magnetic levitation door

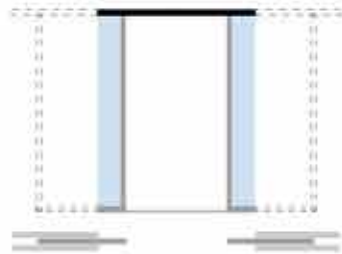


Single-track double-leaf wall-mounted sliding door, double-leaf wall-mounted magnetic levitation door

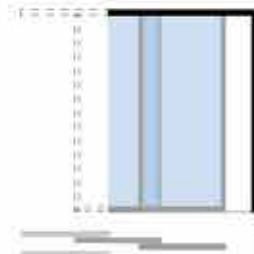


Linked wall-mounted sliding door

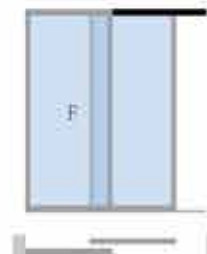


Single-leaf fixed sliding door

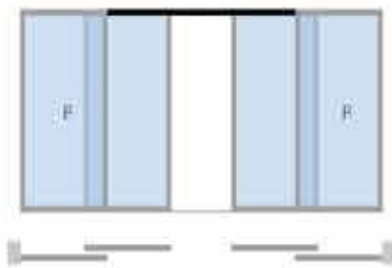


Two double-opening round sliding doors

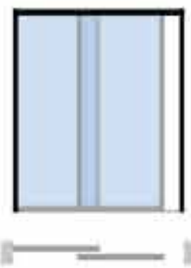


Two-track two-leaf sliding door; two-track single-leaf magnetic levitation door

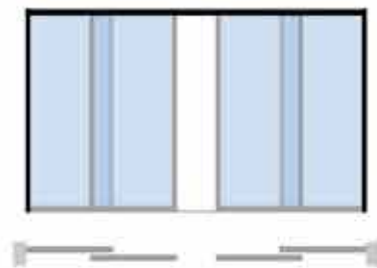


Two-track four-panel sliding door / Two-track double-leaf magnetic levitation door with opposite-direction linkage in the middle

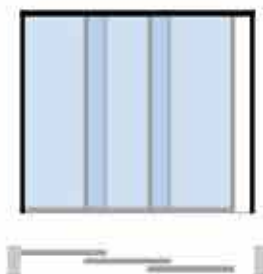


Three-linkage hanging sliding door

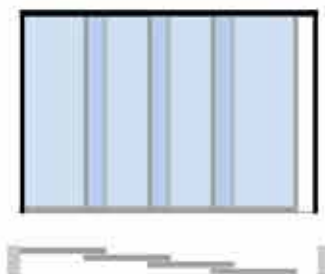


Four-linkage hanging sliding door

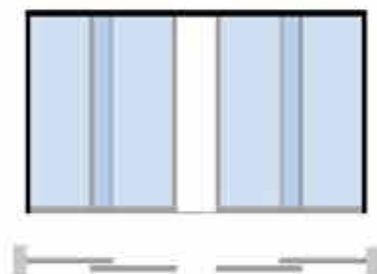


Two-track, four-panel sliding doors / Interlocking mechanism in the middle

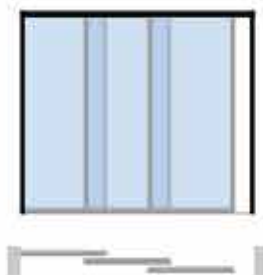

Triple linkage sliding door




Single-track single-leaf sliding door

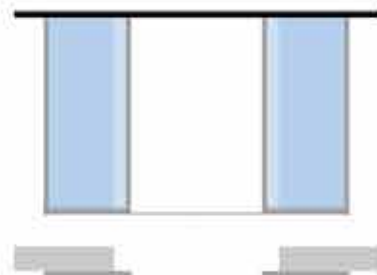


Single-track two-panel sliding door / sliding doors moving in opposite directions

Schematic Diagram of Opening Mode




Manual revolving door

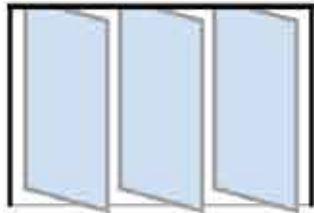


Manual revolving door




Electric revolving door

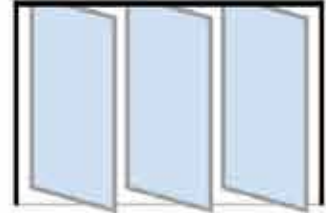


Electric revolving door

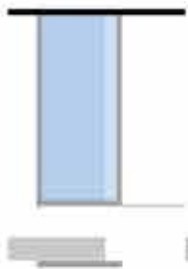


Single-track single-leaf sliding door

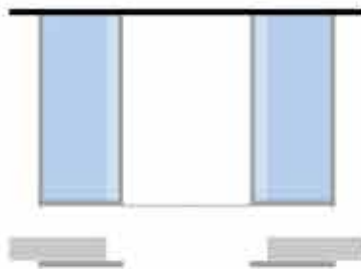


Single-track two-panel sliding door / sliding and moving motion linkage

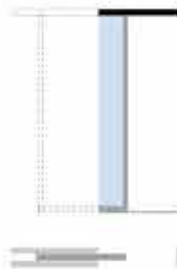


Single-track single-brush in-wall sliding door

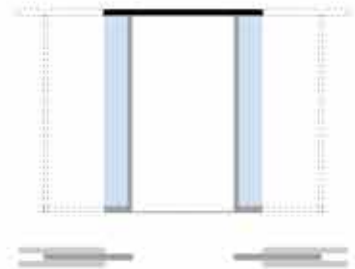


Single-track two-panel wall-mounted sliding door

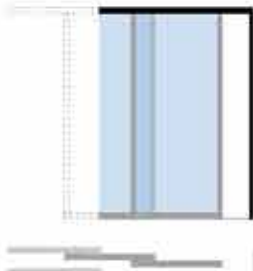


Two-link sliding door

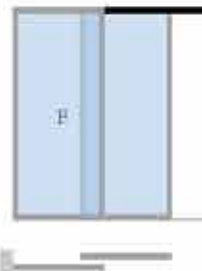

Single-leaf, single-fixed sliding door

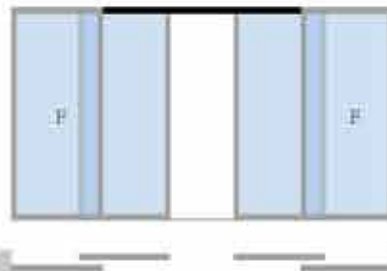


Two double-hinged sliding doors

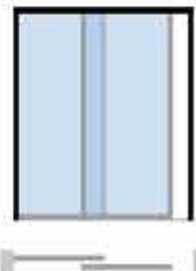


Two sliding doors on two tracks


Schematic Diagram of Opening Mode




PK left inside



PK opens right inside



PK left outside



PK right outside



THANK YOU !

Get in touch with us



admin@ezzogenics.com
david@ezzogenics.com



8535 3868



6968 3098



Bartley Biz Centre,
Blk 15 Kaki Bukit Rd 4, #01-44, S417808



www.ezzodoorss.com